

Alma Mater Studiorum Università di Bologna
Archivio istituzionale della ricerca

An Overview and Comparison of Online Implementable SOC Estimation Methods for Lithium-Ion Battery

This is the final peer-reviewed author's accepted manuscript (postprint) of the following publication:

Published Version:

Meng, J., Ricco, M., Luo, G., Swierczynski, M., Stroe, D., Stroe, A., et al. (2018). An Overview and Comparison of Online Implementable SOC Estimation Methods for Lithium-Ion Battery. IEEE TRANSACTIONS ON INDUSTRY APPLICATIONS, 54(2), 1583-1591 [10.1109/TIA.2017.2775179].

Availability:

This version is available at: <https://hdl.handle.net/11585/676433> since: 2019-02-27

Published:

DOI: <http://doi.org/10.1109/TIA.2017.2775179>

Terms of use:

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).
When citing, please refer to the published version.

(Article begins on next page)

This is the final peer-reviewed accepted manuscript of:

J. Meng et al., "An Overview and Comparison of Online Implementable SOC Estimation Methods for Lithium-Ion Battery" in IEEE Transactions on Industry Applications, vol. 54, no. 2, pp. 1583-1591, March-April 2018

The final published version is available online at:

<https://doi.org/10.1109/TIA.2017.2775179>

Rights / License:

The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>)

When citing, please refer to the published version.

An Overview and Comparison of Online Implementable SOC Estimation Methods for Lithium-ion Battery

Jinhao Meng, *Student Member, IEEE*, Mattia Ricco, *Member, IEEE*, Guangzhao Luo, *Member, IEEE*, Maciej Swierczynski, *Member, IEEE*, Daniel-Ioan Stroe, *Member, IEEE*, Ana-Irina Stroe, *Student Member, IEEE*, Remus Teodorescu, *Fellow, IEEE*

Abstract — With the popularity of Electrical Vehicles (EVs), Lithium-ion battery industry is developing rapidly. To ensure the battery safe usage and to reduce its average lifecycle cost, an accurate State of Charge (SOC) tracking algorithms for real-time implementation are required for different applications. Many SOC estimation methods have been proposed in the literature. However, only a few of them consider the real-time applicability. This paper classifies the recently proposed online SOC estimation methods into five categories. Their principal features are illustrated, and the main pros and cons are provided. The SOC estimation methods are compared and discussed in terms of accuracy, robustness, and computation burden. Afterward, as the most popular type of model based SOC estimation algorithms, seven nonlinear filters existing in literature are compared in terms of their accuracy and execution time as a reference for online implementation.

Index Terms -- SOC estimation; lithium-ion battery; online implementation; comparison; nonlinear filter.

I. INTRODUCTION

Environmental pollution is a severe problem all around the world in these years, especially, global warming has attracted a lot of attentions from both academic and industry sectors. Through the guidance of Paris Agreement, countries and governments have made their efforts to save energy and reduce emission. Consequently, electrification of transportation is becoming an inevitable trend in the future [1]. The Electrical Vehicle (EV) industry is developing fast to meet people's urgent demand for transportation with low carbon emissions.

High specific energy, long cycle life, and low self-discharge rate make lithium-ion battery one of the most promising energy storage components for EV applications [2]–[6]. Just as the fuel gauge in traditional vehicles, the amount of capacity left in the battery is undoubtedly an important index related to the driving experience. Accurate State of Charge (SOC) can help drivers to make wise decisions on when to charge the battery and also help the Battery Management System (BMS) to avoid overcharging and over discharging which may cause safety issues [7], [8]. SOC cannot be directly measured, and it has to be estimated from the estimation of other battery quantities.

This work was supported in part by the Key Program for International S&T Cooperation and Exchange Projects of Shaanxi Province (2017KW-ZD-05) and the Fundamental Research Funds for the Central Universities (3102017JC06004) and (3102017QD029).

Jinhao Meng and Guangzhao Luo are with School of Automation, Northwestern Polytechnical University, Xi'an 710072, China (e-mails: scmjh2008@163.com; guangzhao.luo@nwpu.edu.cn)

Mattia Ricco, Maciej Swierczynski, Daniel-Ioan Stroe, Ana-Irina Stroe and Remus Teodorescu are with the Department of Energy Technology, Aalborg University, Aalborg, Denmark (e-mails: mri@et.aau.dk; mas@et.aau.dk; dis@et.aau.dk; ast@et.aau.dk; ret@et.aau.dk).

In order to fulfill the energy requirement of EV, large numbers of batteries are connected in series or parallel. Due to the cost limitation, the platform where BMS is implemented has limited computational ability. An accurate online SOC estimation method in a real-time platform is not easy. Thus, it is necessary to analyze the features of the online implementable SOC estimation methods.

Besides the accuracy, efficiency and robustness are the other two factors to be considered for SOC estimation in real-time applications [9]. Measuring battery current and voltage inevitably yields errors from sensors. Moreover, the established battery models are not perfect and do not take into account all factors affecting the modeling accuracy. The inner battery characteristics also vary with different operating conditions (e.g., temperature, load current) and battery aging. Hence, the estimation algorithm must be robust to both the measurement errors and the modeling errors. As previously described, the computation ability of BMS is limited. The SOC estimation algorithm should be less time-consuming in order to satisfy the computing power of the low-cost microcontrollers.

Because of the good performance in SOC estimation, nonlinear filters (such as, Extended Kalman Filter (EKF) [10], [11], Unscented Kalman Filter (UKF) [6], [12], [13], Central Difference Kalman Filter (CDKF) [14]–[16], Square Root Unscented Kalman Filter (SR-UKF) [17], [18], Square Root Central Difference Kalman Filter (SR-CDKF) [19], Particle Filter (PF) [20], [21], H-infinity filter [22]–[24], etc) are widely investigated in the literature on the basis of a model based structure.

Many approaches for an accurate prediction of the battery SOC have been presented in the literature, but a relatively limited number of them consider BMS limitations and the real-time requirement and validate proposed methods online in a test bench. Therefore, this paper aims to summarize the features of SOC estimation methods that are suitable for online implementation and compare their advantages and disadvantages. The goal is to contribute to bridging the academic achievements of SOC estimation research into industrial application.

In contrast to the previous overview works on SOC estimation methods, this paper is mainly focused on the recent publications of online implementable SOC estimation methods. In this paper, the online SOC estimation methods are divided into five categories based on their characteristics. A detailed discussion on their pros and cons is given in this paper. Moreover, the previously mentioned seven nonlinear filters are compared in terms of accuracy and execution time in this work, which is different from [25].

The structure of this paper is as follows: Section II details

the online feasible estimation methods and their characteristics presented in the literature. Section III discusses the suitability of those methods for online implementation and presents their pros and cons. The comparison of seven nonlinear filters in accuracy and execution time are shown in Section IV. Conclusions are drawn in Section V.

II. BATTERY MODEL AND ERROR ANALYSIS

A large number of SOC estimation methods have recently been proposed in the literature. Depending on their governing principles, the online SOC estimation algorithms are divided into five categories: Coulomb Counting Methods (CCMs); Open Circuit Voltage Methods (OCVMs); Impedance Spectroscopy Based Methods (ISBMs); Model-Based Methods (MBMs) and Artificial Neural Networks Based Methods (ANNBMs). This section details their features and reviews some recently published papers for each category.

A. Coulomb Counting Method

The definition of SOC is as follows:

$$Z(t) = Z(0) - \int_0^t \frac{\eta_i \cdot i(t)}{C_n} dt \quad (1)$$

Where $Z(t)$ is the SOC at time t and $Z(0)$ is the initial SOC; η_i is the Coulombic efficiency. C_n is the battery capacity, $i(t)$ is the current and the discharging current is considered as positive in Eq.(1).

From Eq. (1), it easy to note that SOC is defined as the integration of the current. Therefore, Coulomb counting is a direct and efficient method for calculating SOC. The self-discharge, temperature and current rate (Fig.1) have an impact on the capacity of battery. Moreover, the inaccuracy of current sensor and the batteries' discontinuous usage in reality also make an accurate initial SOC hardly to be known. Errors from current sensors also accumulate in the calculation process. To overcome these drawbacks, measures for enhancing the CCM are proposed in [26]–[31]. Since Coulombic efficiency effects the accuracy of CCM, updating the Coulombic efficiency online during the estimation process helps to improve the SOC accuracy [27], [28]. However, it is not easy to calculate the true value of Coulombic efficiency, and the battery must be tested under different current rates in advance.

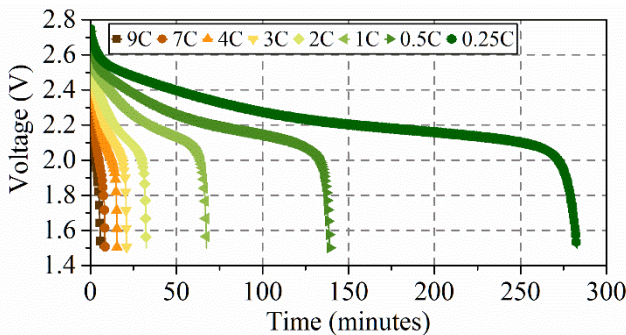


Fig.1. Voltage changes with discharging rate

Combining with the OCV-SOC lookup table is also a good way to compensate the shortages of CCM. In [10], the authors reset the initial SOC of CCM by predicting OCV in very short interruption time, which automatically decreases the SOC

estimating error. Compared with the conventional CCM, the proposed method increases the SOC estimation accuracy by 2.07% when UDDS profile is used. Considering the OCV, resting time and temperature effect, battery's initial SOC is predicted for CCM in [30] and the error of SOC estimation is further reduced by adding the energy efficiency.

Removing errors (including measurement DC bias, self-discharge current and leakage current) [8] from the current measurement also decreases the accumulated errors in CCM. If the initial SOC is known in advance and high precision current sensors are included in the BMS, CCM is very effective and suitable for real-time SOC estimation.

B. Open Circuit Voltage

In order to reach the internal equilibrium, the battery has to be disconnected from any load and rest for enough longer relaxation time. OCV is then measured under this condition. The OCV-SOC lookup table is the most efficient method if an accurate OCV is known. However, the relaxation time of Li-ion battery can be generally as long as 10 hours or even more, which affects the practicality of the OCVM. Furthermore, the relationship between OCV and SOC has proven to change with temperature and age [32]–[35]. Hence, extensive works focusing on improving its accuracy by considering temperature and aging effects are proposed in [33]–[36]. Additionally, the characteristics of OCV-SOC curve are closely related to the battery chemistry. For example, the OCV-SOC curve is quite flat for lithium iron phosphate batteries (Fig.2), which means that a small error in OCV measurement causes a large error in SOC estimation. In Fig.2, the difference of OCV is merely 72mV in the SOC range of 30%~80%. Moreover, the voltage hysteresis problem also affects the accuracy of OCV measurement [37]. Thus, classical OCVM is not quite acceptable for most online conditions. In order to improve its utility, researchers are also working on fast OCV prediction in short relaxation time [38]–[40].

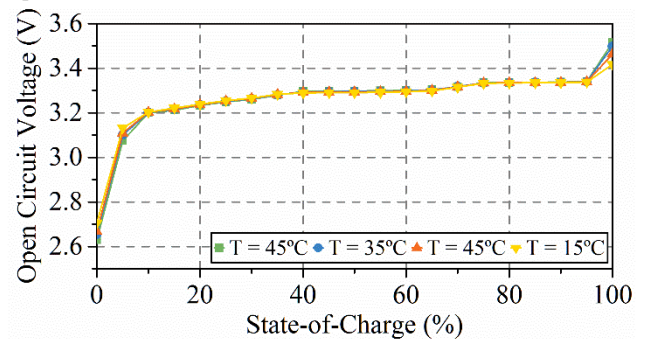


Fig.2. Flat OCV-SOC relationship of LiFePO₄ battery

A new OCV relaxation model is proposed in [41]. The OCV is able to be estimated in just a few minutes after the current interruption. After parameter identification and curve fitting, the proposed model is validated on a 16 bit Infineon microcontroller at the 66 Mhz clock frequency. Combining with the low-cost voltage sensor, Kalman filter is also applied to OCV prediction in short battery disconnected period in [42]. In this way, OCVM has higher computational efficiency and is

suitable for online estimation. Although OCVM confronts many drawbacks, it is still worth improving its applicability for online applications.

C. Impedance Spectroscopy based Method

An electrochemical impedance spectroscopy (EIS) is based on injecting small amplitude AC signals to a battery at different frequencies. The battery impedance at different frequencies are expressed as follows:

$$Z_{EIS}(w) = \frac{U_{AC}}{I_{AC}} \cdot e^{j\varphi} \quad (2)$$

Where U_{AC} and I_{AC} are the peak amplitudes of voltage and current, respectively; φ is the phase shift between current and voltage. The magnitudes of R_{EIS} are expressed by Bode plot and Nyquist diagram.

Several parameters (ohmic resistance, charge transfer resistance, and double layer capacitance) are analyzed from the measured EIS data. Those parameters are functions of SOC, which can be further used as indicators of SOC [41]. It is proven in [42] that the battery impedance is SOC dependent at low frequency.

However, EIS is not easy to measure online and also varies with battery types and experimental conditions [43]. The EIS measurement equipment is usually designed for laboratory use and is very expensive. But EIS is still a powerful tool for analyzing battery internal characteristics and estimating SOC. Many efforts have been made to implement the online EIS measurement [44]–[48], which greatly enhances the possibility of EIS for online applications. An onboard EIS measurement system is proposed in [45], which consists of class A power amplifier, low pass filter, and Digital-to-Analog Converter (DAC) for generating sinusoidal signals. The battery charger is applied to generate current for EIS measurement in [46]. In [47], the authors propose a low cost and practical solution for online measurement of AC impedance by controlling the DC-DC converter. Although EIS is sensitive to SOC and is a non-destructive method, the exact relationship of EIS and SOC, as well as the repeatability of EIS for online measurement, still need further research.

D. Model-based Methods

Among all the SOC estimation methods, the model based ones seem to be the most practical choice for online SOC estimation at present. Most recent works are related with MBM, and a classification is proposed in Fig.3.

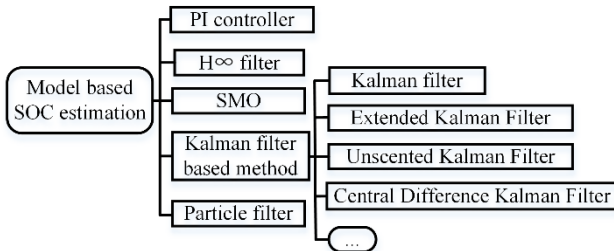


Fig.3. Model-based SOC estimation methods

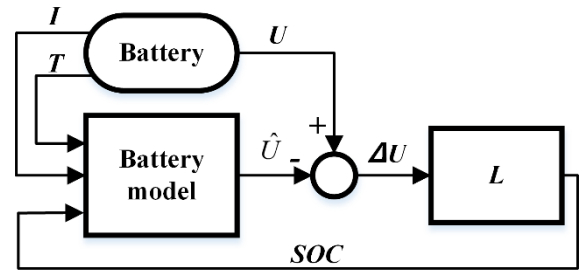


Fig.4 Structure of MBMs

Deduced from Fig.4, the expression of MBMs is typically demonstrated as follows [49]:

$$\begin{cases} \dot{Z} = \frac{\eta_i}{C_n} \cdot i_t - L \cdot (\hat{u}_t - u_t) \\ \hat{u}_t = h(Z, i_t, \dots) \end{cases} \quad (3)$$

where u_t is the terminal voltage at time t measured by voltage sensors, \hat{u}_t is the output from the established battery model, $h(\cdot)$ represents the battery model.

Note that the feedback for correcting the SOC is based on the difference between the terminal voltage measured by the sensor and the output of the battery model. Due to the closed-loop structure, MBMs are able to deal with unknown initial SOC. In Eq. (3), L is the gain for compensating the SOC from CCM. The methods presented in Fig.4 use a different algorithm to calculate the gain L , such as PI [50], [51], H-infinity filter [22]–[24], Kalman filter [10], [12], [13], [17], PF [20], [21], etc. Based on two RC equivalent circuit model, authors in [50] propose a simple structure and highly effective SOC estimation method using two independent PI observers. One PI observer improves the modeling accuracy, and the other one estimates the OCV for SOC estimation simultaneously. H-infinity filter is also used for decreasing the effect of noise and parameter uncertainty on the estimation accuracy. An adaptive H-infinity filter is proposed in [22] for improving the accuracy of SOC estimation results against the noise from sensors and the inaccuracy from battery model. With Recursive Least Square (RLS) updates parameters, the proposed method achieves accurate SOC in a hardware-in-the-loop experiment. Kalman filter is definitely the most popular MBMs due to its robustness to noise in the stochastic process. EKF estimates battery internal temperature and SOC at the same time on the basis of a novel thermoelectric model presented in [52]. In [12], authors validate UKF implemented in a Freescale MC9S12XF512 for SOC estimation. In order to improve the accuracy of battery modeling, electrochemical model-based SOC estimation methods are also proposed in [11], [53], [54].

As previously described in this paper, MBMs rely on precise battery model for accurate SOC estimation. However, battery internal parameters are changed during charging and discharging process. It is difficult to build an accurate enough model to describe all the battery external characteristics. Especially, the computational complexity of the battery model should be restricted to a reasonable range for online applications. Being insensitive to initial SOC and robust to measurement noise, MBMs are very popular for different

kinds of online SOC estimation applications.

E. Artificial Neural Network based Method

Different kinds of artificial neural network (ANN) and some similar methods are very popular in mapping the nonlinear relationship between inputs and outputs of a system. ANN is capable of directly establishing the relationship between battery SOC and the related factors (such as current, voltage and temperature). Then, engineers are able to create the SOC estimator without any prior knowledge of the battery.

Methods, like ANN [52], [55]–[57], Support Vector Machine (SVM) [58], Extreme Learning Machine (ELM) [59], Multivariate Adaptive Regression Splines (MARS) [9], [60], etc., have the ability to deal with the nonlinear mapping problem. Fuzzy logic has a similar characteristic as ANN, thus it is also used for SOC estimation [61]. ANNBM must be trained offline in order to establish the nonlinear relationship. Afterwards, they can run efficiently in a real-time application. Two different structures of ANN are applied to estimate SOC in [52]. Considering the battery capacity fade, accurate SOC is obtained from ANN estimator during the entire battery lifespan. SVM and MARS are used in [58], [60] to immediately establish the nonlinear map of SOC and other measured input variables, respectively.

If appropriate samples are selected and optimized parameters are chosen in the training process, the ANNBM are able to present accurate SOC estimation. However, it can be easily found that the practicability of these methods is closely related to both the data samples and the training process. Since the practical conditions are various, the generalization of ANNBM under different driving cycles should be considered for online application. Generally, ANNBM are easily transplanted to hardware for online implementation after having been trained offline.

III. DISCUSSION

After introducing the features of the SOC estimation methods, their suitability for online usage is discussed in this section. According to the analysis in the previous section, their suitability for online implementation is listed in TABLE I.

From TABLE I, it can be seen that all these methods have their own advantages and disadvantages. However, accuracy, robustness and computational cost are three most important factors to be taken into account in BMS. EV is considered as an example to analyze and compare different methods in this paper.

From an accuracy point of view, each method is capable of achieving good results under specific situations. Since CCM is an open loop structure, initial SOC and current measurement are undoubtedly extremely important for its accuracy. Normally, accurate initial SOC and high precision current sensors are almost unrealistic because of the limited cost in EV. OCVM relies on a precise OCV value for estimating SOC. The OCV can be obtained after the car is parked for a long time without use. During the driving process, the current interruption may also happen when the car is stopped at the traffic light or meet traffic jams. However, the current

interruption under these circumstances is usually too short for battery relaxation. Thus, fast OCV estimation is urgent for the application of OCVM in real time. OCV-SOC curve should be steep for guaranteeing the estimation accuracy. Small errors from voltage sensors may cause large SOC estimation errors because of the flat OCV curve and OCV hysteresis of the LiFePO₄-based battery. ISBM is hardly measured online and varies with measurement conditions. Thus, it is important to establish the clear relationship between EIS and SOC. The accuracy of MBM relies on a precise battery model. Selecting the appropriate model structure for a specific battery enhances the estimation accuracy. However, it is difficult to simulate the complex electrochemical process of the battery. Equivalent circuit model is widely used in MBM. Moreover, the performance and convergence of the corrected algorithm are closely related to an accurate estimated SOC. The accuracy of MBMs is expected to be acceptable for EV applications if the right battery model and the suitable estimation algorithm are chosen. ANNBM are extremely accurate if the current profile of the EV driving cycle is similar to the training samples.

TABLE I
ADVANTAGES AND DISADVANTAGES OF DIFFERENT SOC ESTIMATION METHODS FOR ONLINE IMPLEMENTATION

Categories of Methods	Advantages	Disadvantages
Coulomb counting method	<ul style="list-style-type: none"> • Computational effectively; • Direct SOC calculation; • Easy to understand 	<ul style="list-style-type: none"> • Accurate initial SOC is needed; • Current sensor error accumulated.
Open circuit voltage method	<ul style="list-style-type: none"> • One to one relationship between OCV and SOC; • Small computation burden. 	<ul style="list-style-type: none"> • Long relaxation time for OCV measurement; • Temperature, age, and battery types affect the OCV.
Impedance Spectroscopy based method	<ul style="list-style-type: none"> • Sensitive to SOC variation; • Diverse parameters indicate SOC 	<ul style="list-style-type: none"> • Difficult for online measurement; • Different with battery type, experimental condition, etc.
Model-based method	<ul style="list-style-type: none"> • Insensitive to initial SOC; • Good robust; • High accuracy 	<ul style="list-style-type: none"> • Rely on modeling accuracy; • High computing cost
ANN-based method	<ul style="list-style-type: none"> • Do not need previous knowledge of battery; • Easy transplant to hardware after offline training 	<ul style="list-style-type: none"> • Large amount of training samples is needed; • Hard to generalize to different working conditions.

The practical application always encounters a variety of operating conditions, which means robustness is an important factor. In EV applications, the battery pack should fulfill different power requirements. The battery current, temperature and age keep changing all the time. Including feedback process for correction, a closed-loop system is usually more robust than open loop system. Thus, MBMs have a superior robustness compared with the others. However, a better robustness can also be achieved by the other methods by taking some measures. The robustness of CCM under different driving cycles can be enhanced by considering the temperature

and aging effects. Similarly, adding those effects to OCV-SOC lookup table helps to adjust the OCV under various conditions. For ISBM, measuring EIS at different working conditions prior to usage also improves its robustness in real time applications. MBMs have a better robustness because of the feedback correction mechanism. Since the accuracy of battery model may be reduced during battery usage, online updating parameters are critical for ensuring its robustness. The estimation algorithms should also be insensitive to modeling and sensor errors. A large amount of training data should be collected in advance for the robustness of ANNBMs. Moreover, the parameters in the training process must be optimized, and various validation processes should be performed in order to avoid the local optimization.

The computational overload must be considered for hardware implementation. CCM and OCV are computationally efficient, as they involve a simple calculation process. ISBM needs a powerful processor, since the necessity of measuring EIS online and dealing with a large amount of data. MBMs are time-consuming, especially Kalman filter containing matrix operation in the estimation process. Low-cost applications can choose PI observer or sliding mode observer because of their lower computation burden. ANNBM is less time consuming if ANN is trained offline before transplanting to an embedded system.

Measures can be taken to guarantee the accuracy, robustness and computational efficiency of online SOC estimation methods. For a real-time application, the most suitable method is application dependent and should be a good trade off of all influencing factors (eg. the requirement of accuracy, robustness, and computational effort, etc.). This is also the reason why we choose to compare seven nonlinear filters in Section IV.

IV. THE PERFORMANCE OF THE DIFFERENT NONLINEAR FILTERS ON ONLINE SOC ESTIMATION

As described in part D of Section II, nonlinear filters are very popular for online SOC estimation. Therefore, the most common nonlinear filters proposed in the literature are compared in terms of accuracy and execution time in this Section including: EKF [10], [11], UKF [6], [12], [13], CDKF [14]–[16], SR-UKF [17], [18], SR-CDKF [19], PF [20], [21], H-infinity filter [22]–[24].

For the purpose of comparing different nonlinear filters in an identical condition, we take the following measures:

- 1) The same two RC battery model is applied to each method;
- 2) The code of each method is written by the same person to avoid differences in coding effectiveness;
- 3) The same battery and driving cycle are used to validate the nonlinear filters.

A LiFePO_{4/c} battery cell is tested in the MACCOR 4000 series, and the measurement data is collected for validating the seven nonlinear filters. The accuracy of MACCOR is $\pm 0.01\%$ + 1 digit for voltage measurement and $\pm 0.02\%$ + 1 digit for current measurement. The nominal capacity of the battery is 10Ah, and the nominal voltage is 3.2 V. The temperature in

the chamber is set to 25 °C and the sample time is 1 second. The OCV-SOC relationship is measured every 5% SOC interval from the test bench as shown in Fig.5.

Multi-NEDC driving cycles are applied to test the battery, and the following measurement in Fig.6 are collected. On the basis of the two RC battery model (in Fig.7) and the measurement data from MACCOR, seven different kinds of nonlinear filters are used to estimate SOC. The reference SOC is also obtained from MACCOR. In order to eliminate the parameter uncertainty, RLS is applied to update the parameters of the battery model online. The comparison of the nonlinear filters is shown in Fig.8. The initial SOC is arbitrarily set to 0.7, and the number of the particulars in PF is 100.



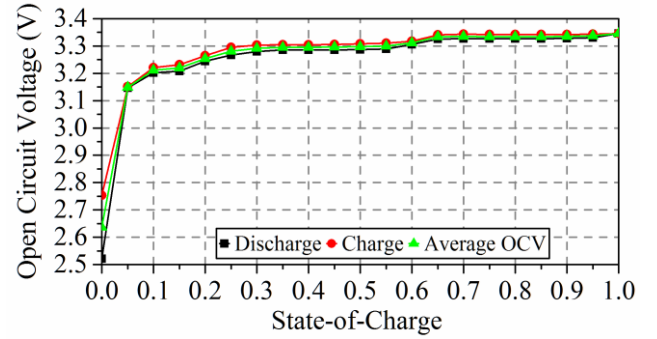


Fig.5 OCV-SOC measurement

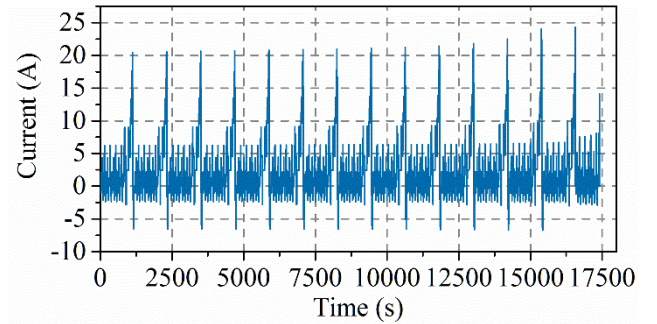

(a) Current

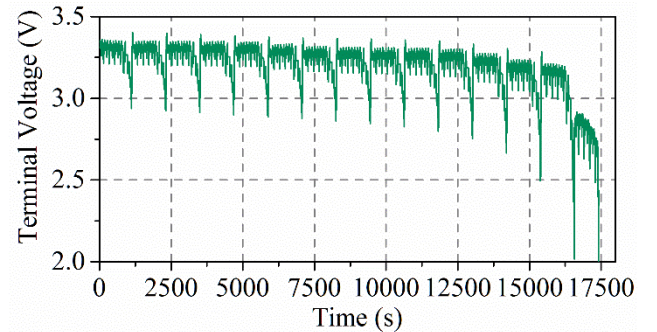

(b) Terminal voltage

Fig.6 Current and voltage measurement during the NEDC driving cycles

The OCV-SOC relationship is established by the curve fitting of the average OCV (Fig.5) as shown in Eq.(4).

$$\begin{aligned} OCV = & -330.2741 \cdot SOC^8 + 1507.8350 \cdot SOC^7 - 2869.7023 \cdot SOC^6 \\ & + 2949.8632 \cdot SOC^5 - 1773.9467 \cdot SOC^4 + 632.0383 \cdot SOC^3 \\ & - 128.9882 \cdot SOC^2 + 13.8940 \cdot SOC + 2.6371 \end{aligned} \quad (4)$$



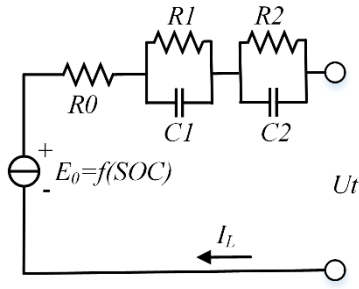



Fig.7. Structure of two RC battery model

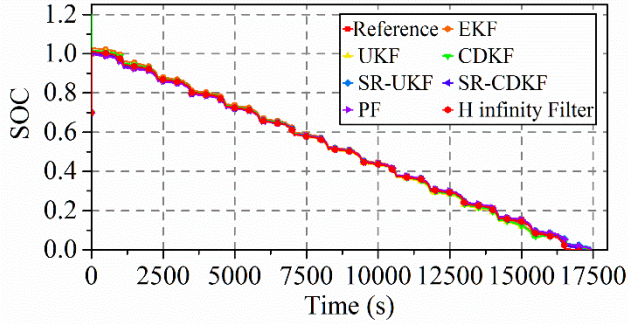

(a) SOC estimation results

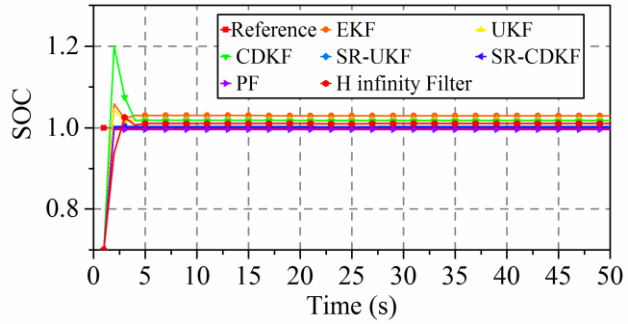

(b) SOC value at the beginning of the estimation (0~50s)

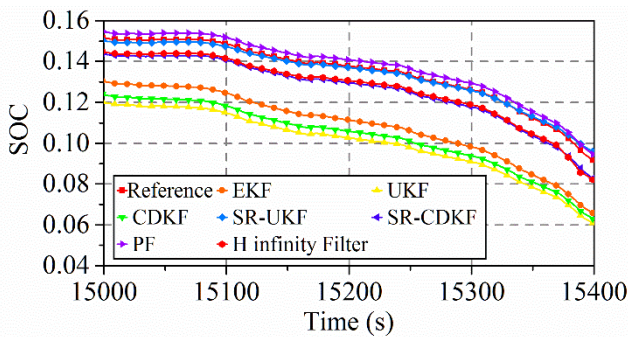

(c) SOC estimation in lower SOC area

Fig.8 Estimation results of different nonlinear filters

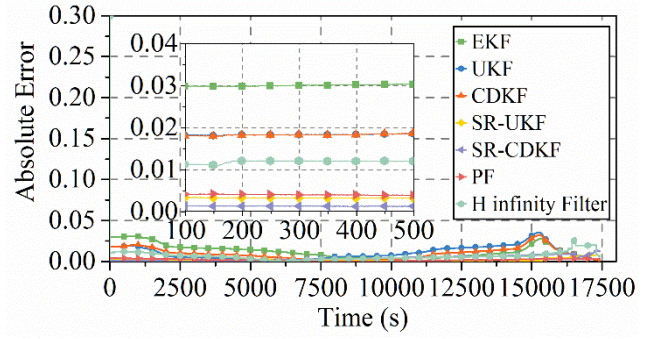


Fig.9 Absolute Error of different nonlinear filters

All methods are able to converge to the reference SOC within a limited time as shown in Fig.8(a). In Fig. 8(b), a zoom of the SOC estimation results is shown. It is possible to note that SR-CDKF, SR-UKF, PF, and H-infinity filter achieve better results than the other nonlinear filters. That is because the square root filter is developed to increase the numerical accuracy of Kalman filter. PF is proposed for the severe nonlinear system, and it is able to work with arbitrary nonlinear noise distribution [62]. Due to the high nonlinearity of battery model in the lower SOC area, these four filters are able to obtain better results also in the lower SOC area in Fig.8(c).

The absolute error in Fig.9 indicates that EKF, UKF, and CDKF have a larger SOC estimation error. This is particularly true in the higher and lower SOC ranges, where the nonlinear characteristic of the battery is more evident. The absolute error in Fig.9 also proves that SR-UKF, SR-CDKF, PF and H-infinity filter are more suitable for strongly nonlinear system compared with the other three nonlinear filters. The Mean Absolute Error (MAE) and the execution time of each nonlinear filter are listed in TABLE II.

TABLE II
COMPARISON OF MAE AND EXECUTION TIME

Method	MAE	Execution time(ms)
EKF	0.0121	0.023177
UKF	0.0105	0.093621
CDKF	0.0096	0.093438
SR-UKF	0.0022	0.132310
SR-CDKF	0.0039	0.142347
PF	0.0020	1.454133
H infinity Filter	0.0065	0.034674

The execution time is measured through a Processor-in-the-Loop way. The nonlinear filters are downloaded to a MicroZed development board (Xilinx Zynq XC7Z020) by the model-based design approach in Simulink. In TABLE II, PF obtains the best results in terms of MAE (0.0020), while the execution time is much longer than the others methods. The MAE of H-infinity filter is 0.0065 which is 50% of EKF. But its execution time is 0.034674ms, which is 150% of EKF. Therefore, H-infinity filter is a better trade-off between accuracy and execution time for online SOC estimation.

V. CONCLUSION

SOC estimation is crucial for many applications of Li-ion batteries. This paper reviews the SOC estimation methods that are suitable for online usage and classify them into five categories: CCMs, OCVMs, ISBMs, MBMs and ANNBMs. The principles and features of each method are recalled in this work. The CCM directly estimates SOC from the integration of current, which is computationally effective. The initial SOC and the accumulation of sensor errors decrease the practicality of the CCM. The OCVM makes full use of the monotonous relationship of OCV and SOC. However, the long relaxation time of the batteries affects its use in real-time applications. ISBM can directly reflect the internal parameters changes inside the battery. The ISBMs are sensitive to SOC variations, but the difficulty in online EIS measurement limits its online usage.

Different types of MBMs have been proposed in the literature, however, the Kalman filter is the most popular one. MBMs are more accurate and robust than other methods, but they are also more computationally demanding. Moreover, their performance is closely related to the established battery model. ANNBMs are easy to implement online after offline data training. However, the complicated data collecting process and the applicability of the method on the new coming data not having been trained limits its online usage.

The suitable online SOC estimation method in real applications should be a good trade off of the accuracy, robustness and computational effort on the foundation of the specific condition. The comparison of seven different nonlinear filters for SOC estimation proves the accuracy of the MBMs. The experimental results have shown that the H-infinity filter gives a good compromise in terms of accuracy and execution time. Then, it is a good choice for online SOC estimation.

REFERENCES

- [1] B. Bilgin *et al.*, "Making the Case for Electrified Transportation," *IEEE Trans. Transp. Electr.*, vol. 1, no. 1, pp. 4–17, 2015.
- [2] A. Khaligh and Z. Li, "Battery, ultracapacitor, fuel cell, and hybrid energy storage systems for electric, hybrid electric, fuel cell, and plug-in hybrid electric vehicles: State of the art," *IEEE Trans. Veh. Technol.*, vol. 59, no. 6, pp. 2806–2814, 2010.
- [3] A.-I. Stan, M. Swierczynski, D.-I. Stroe, R. Teodorescu, and S. J. Andreassen, "Lithium ion battery chemistries from renewable energy storage to automotive and back-up power applications — An overview," *2014 Int. Conf. Optim. Electr. Electron. Equip.*, pp. 713–720, 2014.
- [4] B. Nykvist and M. Nilsson, "Rapidly falling costs of battery packs for electric vehicles," *Nat. Clim. Chang.*, vol. 5, no. 4, pp. 329–332, 2015.
- [5] B. Diouf and R. Pote, "Potential of lithium-ion batteries in renewable energy," *Renewable Energy*, vol. 76, pp. 375–380, 2015.
- [6] J. Meng, G. Luo, and F. Gao, "Lithium Polymer Battery State-of-Charge Estimation Based on Adaptive Unscented Kalman Filter and Support Vector Machine," *IEEE Trans. Power Electron.*, vol. 31, no. 3, pp. 2226–2238, 2016.
- [7] L. Lu, X. Han, J. Li, J. Hua, and M. Ouyang, "A review on the key issues for lithium-ion battery management in electric vehicles," *Journal of Power Sources*, vol. 226, pp. 272–288, 2013.
- [8] G. L. Plett, *Battery management systems, volume ii: Equivalent-circuit methods*. Artech House Publishers, 2015.
- [9] J. Meng, G. Luo, E. Breaz, and F. Gao, "A robust battery state-of-charge estimation method for embedded hybrid energy system," in *IECON 2015 - 41st Annual Conference of the IEEE Industrial Electronics Society*, 2015, pp. 1205–1210.
- [10] S. Nejad, D. T. Gladwin, and D. A. Stone, "A systematic review of lumped-parameter equivalent circuit models for real-time estimation of lithium-ion battery states," *Journal of Power Sources*, vol. 316, pp. 183–196, 2016.
- [11] S. Santhanagopalan and R. E. White, "Online estimation of the state of charge of a lithium ion cell," *J. Power Sources*, vol. 161, no. 2, pp. 1346–1355, Oct. 2006.
- [12] H. He, R. Xiong, and J. Peng, "Real-time estimation of battery state-of-charge with unscented Kalman filter and RTOS μ COS-II platform," *Appl. Energy*, vol. 162, pp. 1410–1418, 2016.
- [13] K. S. Low and H. Aung, "Temperature dependent state-of-charge estimation of lithium ion battery using dual spherical unscented Kalman filter," *IET Power Electron.*, vol. 8, no. 10, pp. 2026–2033, 2015.
- [14] G. L. Plett, "Sigma-point Kalman filtering for battery management systems of LiPB-based HEV battery packs. Part 1: Introduction and state estimation," *J. Power Sources*, vol. 161, no. 2, pp. 1356–1368, 2006.
- [15] G. L. Plett, "Sigma-point Kalman filtering for battery management systems of LiPB-based HEV battery packs. Part 2: Simultaneous state and parameter estimation," *J. Power Sources*, vol. 161, no. 2, pp. 1369–1384, 2006.
- [16] J. Gao, Y. Zhang, and H. He, "A real-time joint estimator for model parameters and state of charge of lithium-ion batteries in electric vehicles," *Energies*, vol. 8, no. 8, pp. 8594–8612, 2015.
- [17] H. Aung, K. Soon Low, and S. Ting Goh, "State-of-charge estimation of lithium-ion battery using square root spherical unscented Kalman filter (Sqrt-UKFST) in nanosatellite," *IEEE Trans. Power Electron.*, vol. 30, no. 9, pp. 4774–4783, 2015.
- [18] M. Luzzi, M. Paschero, A. Rossini, A. Rizzi, and F. M. F. Mascioli, "Comparison between two nonlinear Kalman Filters for reliable SoC estimation on a prototypal BMS," in *IECON Proceedings (Industrial Electronics Conference)*, 2016, pp. 5501–5506.
- [19] J. Li, H. Lu, Z. Yang, and F. Pei, "State-of-charge estimation and charge equalization for electric agricultural machinery using Square-Root Central Difference Kalman Filter," in *Proceedings 2011 International Conference on Transportation, Mechanical, and Electrical Engineering, TMEEE 2011*, 2011, pp. 966–969.
- [20] Y. Wang, C. Zhang, and Z. Chen, "A method for state-of-charge estimation of LiFePO₄ batteries at dynamic currents and temperatures using particle filter," *J. Power Sources*, vol. 279, pp. 306–311, 2015.
- [21] A. Bartlett, J. Marcicki, S. Onori, G. Rizzoni, X. G. Yang, and T. Miller, "Electrochemical Model-Based State of Charge and Capacity Estimation for a Composite Electrode Lithium-Ion Battery," *IEEE Trans. Control Syst. Technol.*, vol. 24, no. 2, pp. 384–399, 2016.
- [22] Y. Zhang, R. Xiong, H. He, and W. Shen, "Lithium-Ion Battery Pack State of Charge and State of Energy Estimation Algorithms Using a Hardware-in-the-Loop Validation," *IEEE Trans. Power Electron.*, vol. 32, no. 6, pp. 4421–4431, 2017.
- [23] M. Charkhgard and M. H. Zarif, "Design of adaptive H ∞ filter for implementing on state-of-charge estimation based on battery state-of-charge-varying modelling," *IET Power Electron.*, vol. 8, no. 10, pp. 1825–1833, 2015.
- [24] C. Chen, R. Xiong, and W. Shen, "A Lithium-Ion Battery-in-the-Loop Approach to Test and Validate Multiscale Dual H Infinity Filters for State-of-Charge and Capacity Estimation," *IEEE Trans. Power Electron.*, vol. 33, no. 1, pp. 332–342, Jan. 2018.
- [25] J. Meng *et al.*, "An overview of online implementable soc estimation methods for lithium-ion batteries," in *Proceedings - 2017 International Conference on Optimization of Electrical and Electronic Equipment, OPTIM 2017 and 2017 Intl Aegean Conference on Electrical Machines and Power Electronics, ACEMP 2017*, 2017, pp. 573–580.
- [26] A. Purwadi, A. Rizqian, A. Kevin, and N. Heryana, "State of Charge estimation method for lithium battery using combination of Coulomb Counting and Adaptive System with considering the effect of temperature," in *The 2nd IEEE Conference on Power Engineering and Renewable Energy (ICPERE) 2014*, 2014, pp. 91–95.
- [27] E. Leksono, I. N. Haq, M. Iqbal, F. X. N. Soelami, and I. G. N. Merthayasa, "State of charge (SoC) estimation on LiFePO₄ battery module using Coulomb counting methods with modified Peukert," in *Proceedings of the 2013 Joint International Conference on Rural Information and Communication Technology and Electric-Vehicle Technology, rICT and ICEV-T 2013*, 2013.
- [28] K. S. Ng, C. S. Moo, Y. P. Chen, and Y. C. Hsieh, "Enhanced coulomb counting method for estimating state-of-charge and state-of-health of lithium-ion batteries," *Appl. Energy*, vol. 86, no. 9, pp. 1506–1511, Sep. 2009.

- [29] Y. M. Jeong, Y. K. Cho, J. H. Ahn, S. H. Ryu, and B. K. Lee, "Enhanced coulomb counting method with adaptive SOC reset time for estimating OCV," in *2014 IEEE Energy Conversion Congress and Exposition, ECCE 2014*, 2014, pp. 4313–4318.
- [30] Y. Zhang, W. Song, S. Lin, and Z. Feng, "A novel model of the initial state of charge estimation for LiFePO₄ batteries," *J. Power Sources*, vol. 248, pp. 1028–1033, 2014.
- [31] M. Becherif, M. C. Péra, D. Hissel, and S. Jemei, "Enhancement of the coulomb counter estimator by the on-board vehicle determination of battery initial state of Charge," in *IFAC Proceedings Volumes (IFAC-PapersOnline)*, 2012, vol. 8, no. PART 1, pp. 621–626.
- [32] L. Lavigne, J. Sabatier, J. M. Francisco, F. Guillemard, and A. Noury, "Lithium-ion Open Circuit Voltage (OCV) curve modelling and its ageing adjustment," *J. Power Sources*, vol. 324, pp. 694–703, 2016.
- [33] Y.-S. Lee, M. Liu, C.-C. Sun, and M.-W. Cheng, "State-of-charge estimation with aging effect and correction for lithium-ion battery," *IET Electr. Syst. Transp.*, vol. 5, no. 2, pp. 70–76, 2015.
- [34] S. Tong, M. P. Klein, and J. W. Park, "On-line optimization of battery open circuit voltage for improved state-of-charge and state-of-health estimation," *J. Power Sources*, vol. 293, pp. 416–428, 2015.
- [35] Y. Xing, W. He, M. Pecht, and K. L. Tsui, "State of charge estimation of lithium-ion batteries using the open-circuit voltage at various ambient temperatures," *Appl. Energy*, vol. 113, pp. 106–115, 2014.
- [36] B. Pattipati, B. Balasingam, G. V. Avvari, K. R. Pattipati, and Y. Bar-Shalom, "Open circuit voltage characterization of lithium-ion batteries," *J. Power Sources*, vol. 269, pp. 317–333, 2014.
- [37] G. Dong, J. Wei, C. Zhang, and Z. Chen, "Online state of charge estimation and open circuit voltage hysteresis modeling of LiFePO₄ battery using invariant imbedding method," *Appl. Energy*, vol. 162, pp. 163–171, 2016.
- [38] W. Waag and D. U. Sauer, "Adaptive estimation of the electromotive force of the lithium-ion battery after current interruption for an accurate state-of-charge and capacity determination," *Appl. Energy*, vol. 111, pp. 416–427, 2013.
- [39] N. Lin, S. Ci, and D. Wu, "A novel low-cost online state of charge estimation method for reconfigurable battery pack," in *Conference Proceedings - IEEE Applied Power Electronics Conference and Exposition - APEC*, 2016, vol. 2016-May, pp. 3189–3192.
- [40] L. Pei, C. Zhu, and R. Lu, "Relaxation model of the open-circuit voltage for state-of-charge estimation in lithium-ion batteries," *IET Electr. Syst. Transp.*, vol. 3, no. 4, pp. 112–117, 2013.
- [41] A. Densmore and M. Hanif, "Determining battery SoC using Electrochemical Impedance Spectroscopy and the Extreme Learning Machine," in *2015 IEEE 2nd International Future Energy Electronics Conference (IFEEEC)*, 2015, pp. 1–7.
- [42] M. Galeotti, L. Cinà, C. Giammarco, S. Cordiner, and A. Di Carlo, "Performance analysis and SOH (state of health) evaluation of lithium polymer batteries through electrochemical impedance spectroscopy," *Energy*, vol. 89, pp. 678–686, 2015.
- [43] S. Rodrigues, N. Munichandraiah, and A. K. Shukla, "Review of state-of-charge indication of batteries by means of a.c. impedance measurements," *J. Power Sources*, vol. 87, no. 1, pp. 12–20, 2000.
- [44] M. A. Varnosfaderani and D. Strickland, "Online impedance spectroscopy estimation of a battery," in *2016 18th European Conference on Power Electronics and Applications, EPE 2016 ECCE Europe*, 2016.
- [45] X. Wang, X. Wei, H. Dai, and Q. Wu, "State Estimation of Lithium Ion Battery Based on Electrochemical Impedance Spectroscopy with On-Board Impedance Measurement System," in *2015 IEEE Vehicle Power and Propulsion Conference (VPPC)*, 2015, pp. 1–5.
- [46] R. Koch, R. Kuhn, I. Zilberman, and A. Jossen, "Electrochemical impedance spectroscopy for online battery monitoring - Power electronics control," in *2014 16th European Conference on Power Electronics and Applications, EPE-ECCE Europe 2014*, 2014.
- [47] W. Huang and J. A. Qahouq, "An online battery impedance measurement method using DC-DC power converter control," *IEEE Trans. Ind. Electron.*, vol. 61, no. 11, pp. 5987–5995, 2014.
- [48] J. A. Qahouq and Z. Xia, "Single-Perturbation-Cycle Online Battery Impedance Spectrum Measurement Method with Closed-Loop Control of Power Converter," *IEEE Trans. Ind. Electron.*, vol. 64, no. 9, pp. 7019–7029, 2017.
- [49] C. Zhang, L. Y. Wang, X. Li, W. Chen, G. G. Yin, and J. Jiang, "Robust and Adaptive Estimation of State of Charge for Lithium-Ion Batteries," *IEEE Trans. Ind. Electron.*, vol. 62, no. 8, pp. 4948–4957, 2015.
- [50] M. Cacciato, G. Nobile, G. Scarcella, and G. Scelba, "Real-Time Model-Based Estimation of SOC and SOH for Energy Storage Systems," *IEEE Trans. Power Electron.*, vol. 32, no. 1, pp. 794–803, 2017.
- [51] J. Xu, C. C. Mi, B. Cao, J. Deng, Z. Chen, and S. Li, "The state of charge estimation of lithium-ion batteries based on a proportional-integral observer," *IEEE Trans. Veh. Technol.*, vol. 63, no. 4, pp. 1614–1621, 2014.
- [52] A. A. Hussein, "Capacity Fade Estimation in Electric Vehicle Li-Ion Batteries Using Artificial Neural Networks," *IEEE Trans. Ind. Appl.*, vol. 51, no. 3, pp. 2321–2330, 2015.
- [53] S. J. Moura, N. A. Chaturvedi, and M. Krstic, "PDE estimation techniques for advanced battery management systems — Part I: SOC estimation," in *2012 American Control Conference (ACC)*, 2012, pp. 559–565.
- [54] S. Dey, B. Ayalew, and P. Pisu, "Nonlinear Robust Observers for State-of-Charge Estimation of Lithium-Ion Cells Based on a Reduced Electrochemical Model," *IEEE Trans. Control Syst. Technol.*, vol. 23, no. 5, pp. 1935–1942, 2015.
- [55] J. Wu, C. Zhang, and Z. Chen, "An online method for lithium-ion battery remaining useful life estimation using importance sampling and neural networks," *Appl. Energy*, vol. 173, pp. 134–140, 2016.
- [56] J. Chen, Q. Ouyang, C. Xu, and H. Su, "Neural Network-Based State of Charge Observer Design for Lithium-Ion Batteries," *IEEE Transactions on Control Systems Technology*, 2017.
- [57] J. Wu, Y. Wang, X. Zhang, and Z. Chen, "A novel state of health estimation method of Li-ion battery using group method of data handling," *J. Power Sources*, vol. 327, pp. 457–464, 2016.
- [58] J. C. Alvarez Anton, P. J. Garcia Nieto, C. Blanco Viejo, and J. A. Vilan Vilan, "Support vector machines used to estimate the battery state of charge," *IEEE Trans. Power Electron.*, vol. 28, no. 12, pp. 5919–5926, 2013.
- [59] J. Du, Z. Liu, and Y. Wang, "State of charge estimation for Li-ion battery based on model from extreme learning machine," *Control Eng. Pract.*, vol. 26, no. 1, pp. 11–19, 2014.
- [60] J. C. Álvarez Antón, P. J. García Nieto, F. J. de Cos Juez, F. Sánchez Lasheras, C. Blanco Viejo, and N. Roqueñí Gutiérrez, "Battery State-of-Charge Estimator Using the MARS Technique," *IEEE Trans. Power Electron.*, vol. 28, no. 8, pp. 3798–3805, Aug. 2013.
- [61] A. Zenati, P. Desprez, and H. Razik, "Estimation of the SOC and the SOH of Li-ion batteries, by combining impedance measurements with the fuzzy logic inference," in *IECON Proceedings (Industrial Electronics Conference)*, 2010, pp. 1773–1778.
- [62] D. Simon, *Optimal State Estimation: Kalman, H_∞, and Nonlinear Approaches*. 2006.



of hybrid electric vehicles.



digital controllers for modular multilevel converters and identification algorithms for power electronics and photovoltaic systems.

Jinhao Meng received the M.S. degree in control theory and control engineering from Northwestern Polytechnical University (NPU), Xi'an, China, in 2013. He is currently pursuing the Ph.D. degree in electrical engineering also at NPU. Now he is supported by the China Scholarship Council as a joint Ph.D. student with the Department of Energy Technology, Aalborg University, Aalborg, Denmark.

His research interests are battery modeling, battery status estimation, and energy management

Mattia Ricco received the Master degree (cum laude) in electronic engineering from the University of Salerno, Italy, in 2011 and the Ph.D. degree in electrical and electronic engineering from the University of Cergy-Pontoise, France, and in information engineering from the University of Salerno, Italy, in 2015.

Since September 2015, he is a Post-doctoral Research Fellow at Aalborg University, Aalborg, Denmark. His main research interests are the design and the implementation in FPGA devices of



Guangzhao Luo received the M.S. and Ph.D. degrees in electrical engineering from Northwestern Polytechnical University (NPU), Xi'an, China, in 1998 and 2003, respectively.

From 2003 to 2004, he was a Postdoctoral in University of Federal Defense, Munich, Germany. He is currently a Professor with NPU. In addition, he is the Vice Director of the Rare Earth Permanent Magnet (REPM) Electric Machine and Control Engineering Center of Shaanxi Province. His research interests include advance control theory of

permanent magnet electrical machine, high performance control technology of PMSM for electric traction and EV, real-time simulation technology for electrical drive system, and intelligence control of new energy conversion.

Dr. Luo received the second prize of the China National Defense Science and Technology Progress Award in 1995 and 2011, respectively.



Maciej Swierczynski received his B. Tech. degree from AGH University of Science and Technology, Poland in 2005 and M. Tech degree from AGH University of Science and Technology, Poland, Cracow in 2007 in Computer Engineering for Industrial Applications and from Aalborg University, Denmark in 2009 in Power Electronics and Drives. In 2012, he completed his Ph.D. at Aalborg University, Denmark. He is working currently as an Associate Professor at Aalborg University. His area of research is in energy storage

technologies for wind, EV and residential applications, battery testing, modeling, and lifetime analyses.



Daniel-Ioan Stroe received the Dipl.-Ing. degree in automatics from "Transilvania" University of Brasov, Romania, in 2008, and M.Sc. degree in wind power systems from Aalborg University, Aalborg, Denmark, in 2010. He has been with Aalborg University since 2010, from where he obtained his Ph.D. degree in lifetime modelling of Lithium-ion batteries in 2014, and he is currently an Assistant Professor with the Department of Energy Technology. He was a Visiting Researcher with RWTH Aachen, Germany, in 2013. He has co-

authored over 70 journal and conference papers. His current research interests are in the area of energy storage systems for grid and e-mobility, Lithium-based batteries testing and modelling, and lifetime estimation of Lithium-ion batteries.



Ana-Irina Stroe received the Dipl.-Ing. degree in automatics from "Transilvania" University of Brasov, Romania, in 2008, and M.Sc. degree in wind power systems from Aalborg University, Aalborg, Denmark, in 2010. Between 2011 and 2013, Ms. Stroe was a Scientific Assistant with Department of Energy Technology, Aalborg University, where she is currently working towards the Ph.D. degree in the topic of lifetime testing and modelling of Lithium-ion batteries. Her current research interest includes storage systems for

utility, UPS, and e-mobility applications and performance-degradation modelling of Lithium-ion batteries.



Remus Teodorescu received the Dipl.Ing. degree in electrical engineering from the Polytechnical University of Bucharest, Bucharest, Romania, in 1989, and the Ph.D. degree in power electronics from the University of Galati, Romania, in 1994. In 1998, he joined the Power Electronics Section, Department of Energy Technology, Aalborg University, Aalborg, Denmark, where he is currently a Full Professor. Since 2013, he has been a Visiting Professor with Chalmers University. His research interests include design and control of

grid-connected converters for photovoltaic and wind power systems, HVDC/FACTS based on modular multilevel converters (MMC) and storage systems based on Li-ion battery technology including modular converters and active BMS.