

Alma Mater Studiorum Università di Bologna
Archivio istituzionale della ricerca

Energy efficiency, demand side management and energy storage technologies - A critical analysis of possible paths of integration in the built environment

This is the final peer-reviewed author's accepted manuscript (postprint) of the following publication:

Published Version:

L.Tronchin, M. Manfren, B. Nastasi (2018). Energy efficiency, demand side management and energy storage technologies - A critical analysis of possible paths of integration in the built environment. RENEWABLE & SUSTAINABLE ENERGY REVIEWS, 95, 341-353 [10.1016/j.rser.2018.06.060].

Availability:

This version is available at: <https://hdl.handle.net/11585/640312> since: 2018-08-11

Published:

DOI: <http://doi.org/10.1016/j.rser.2018.06.060>

Terms of use:

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).
When citing, please refer to the published version.

(Article begins on next page)

This is the final peer-reviewed accepted manuscript of:

Lamberto Tronchin, Massimiliano Manfren, Benedetto Nastasi, *Energy efficiency, demand side management and energy storage technologies – A critical analysis of possible paths of integration in the built environment*, Renewable and Sustainable Energy Reviews, Volume 95, 2018, pp. 341-353.

The final published version is available online at:
<https://doi.org/10.1016/j.rser.2018.06.060>

Rights / License:

The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>)

When citing, please refer to the published version.

42 **Highlights:**

- 43 • Buildings represent a relevant component in sustainability transition policies.
- 44 • Multi-Level Perspective planning has to be considered in built environment
- 45 evolution.
- 46 • Analysis of complementarities is crucial to understand technological and
- 47 sectorial issues.
- 48 • Integration and scalability of computing techniques for optimization and inverse
- 49 modelling is necessary.
- 50 • Demand side management and storage technologies are essential to decouple
- 51 production and demand.
- 52

53 **Table of contents**

54	Abstract.....	1
55	1 Introduction	3
56	2 Energy transitions planning.....	4
57	2.1 Multi-Level Perspective planning.....	5
58	2.2 Analysis of complementarities in energy transitions.....	6
59	2.3 The role of data-driven approaches for built environment evolution.....	7
60	3 Energy modelling in the built environment.....	8
61	3.1 State of the art of energy modelling.....	9
62	3.2 Challenges for energy modelling.....	10
63	3.3 Techno-economic optimization issues.....	13
64	4 Demand side management and energy storage systems.....	14
65	4.1 Technological issues overview	14
66	4.2 Technological and sectorial level complementarities.....	16
67	4.3 Levelized Cost of Energy metric	18
68	5 Conclusion.....	19
69	References	20
70		
71		

1 Introduction

The transition towards energy systems characterized by high share of renewable energy sources (RES) is necessary to reduce drastically carbon emission and avoid climate change related risks. Buildings have a great impact in terms of carbon emission at the EU [1], US and global scale [2] and the issue of resource efficiency for the building sector [3] is becoming increasingly relevant, highlighting the need for a systemic view and adequate policies, as well as adjustments in the energy market [4]. At EU level, for example, building accounts for approximately 40% of carbon emission, determined by their direct energy use [1, 5], and for about half of the extracted materials, half of energy consumption, one third of water consumption, and one third of waste generated, if we consider the direct and indirect impact of the whole sector [6]. Additionally, at the global level, the rapid urbanization trend determines the need for a concentration of research and development efforts in the built environment area. From a practical standpoint, we have to prioritize actions, i.e. define policies able to cope effectively with the underlying problems, considering realistically technical, economic, social and environmental constraints.

Energy efficiency measures and, in particular, deep retrofit strategies for the existing building stock can constitute a great opportunity [7, 8], considering also the convergence of economic [9] and technological paradigms, focusing on intelligent assets [10], and the emergence of innovative business models [11], which can contribute to reshape the energy market and to create new economic development. The transition from the present energy paradigm to a sustainable one is a great challenge that requires an open multi-disciplinary approach [12, 13], based on the quadruple helix model of innovation [14, 15], in which civil society organizations, industry, government and academia collaborate to share knowledge and data. In this sense, data models are essential to address analytically the problem of transitions [16-18] and a particular attention should be devoted to the role of open data and software [17] and optimization [18] formulations. Design, construction and operation practices in the building sector can profoundly benefit from the ongoing development in this area, using ontologies, semantic web technologies [19] and appropriate data formats [20]. High efficiency buildings are technically and economically feasible today [21] and Nearly Zero Energy Building (NZEB) paradigm [22], both for new and existing buildings, combines a radical energy demand reduction with on-site or nearby renewable energy supply. However, a high penetration of weather dependent RES poses the problem of balancing the mismatch between inflexible production and inelastic demand [23, 24] and of being able to integrate it properly in the built environment [25] as well. On the infrastructural side, these technical issues can determine a consistent limit for the effective deployment of policies in this direction, as different countries at the EU level could reach in a few years limits in terms of RES penetration, if no adjustments will be done [26]. On the built environment side, the use of conventional electric energy storage technologies and systems are analyzed with the scope of selecting profitable design configurations for customers [27].

As a matter of fact, this technology to achieve a complete self-sufficiency in buildings may be practically infeasible from the techno-economic (but also environmental) point of view, even in the case of a radical reduction of the cost of technologies, due to the necessity of long-term storage (to balance the seasonality of demands) when heating and cooling are supplied by electricity. These factors should be acknowledged when passing from building-level impacts to system wide impact on infrastructures [28]. Power-to-What (P2X) technologies, such as Power to Heat [29-31], Power to Hydrogen and Power to Gas [32-34] are opening new possibilities by combining the temporal and

122 spatial decoupling of supply and demand with an interplay among different sectors in
123 the energy system and among multiple energy carriers. Further, the present state of the
124 art of research in decentralized energy systems is embodied in concepts such as Multi
125 Energy Systems [35] and Energy Hubs [36, 37], which can guarantee scalability and
126 flexibility of application, from buildings to districts/neighbourhoods and cities. A
127 relevant research effort has been devoted, in the last years, to the development of
128 optimization models for energy hubs and multi-energy system [38], including
129 simplification of electrical grid constraints [39, 40], and thermal storage behaviour [41].
130 However, there could be further improvements with respect to modelling of temperature
131 levels [42], selection of multi-objective optimal solutions [43], evaluation of
132 stakeholders' perspectives and constraints [44], prediction of systems' operation [45],
133 among others. Additionally, the applicability of calibrated data-driven models for
134 energy management has been tested in extensively [46, 47], showing a potential
135 continuity with research dealing with building performance gap [48, 49], considering
136 also the incoming problem of embodied energy [50] and of long-term performance
137 monitoring and data analysis [51].

138 For these reasons, this article introduces first relevant concepts such as Multi-Level
139 Perspective planning [52] and analysis of complementarities [53] in sustainability
140 transitions, to clarify the research background. After that, the article investigates the
141 cross-sectorial role of models in the energy sector, because the use of common
142 principles and techniques could stimulate a rapid development of multi-disciplinary
143 research, aimed at sustainable energy transitions. Finally, the importance of demand
144 side management and storage technologies is acknowledged, presenting relevant issues
145 for their integration in the built environment. The goal of the article is indicating
146 relevant elements to be considered for the evolution of research in built environment,
147 insisting in particular on the scalability of techno-economic optimization and inverse
148 modelling techniques, which can be further integrated and improved with respect to the
149 current state of the art, following a continuous improvement strategy, empirically
150 grounded.

151 152 153 **2 Energy transitions planning**

154 The topic of transition planning towards a low carbon and sustainable society is gaining
155 increasingly importance. In fact, the transition from the present environmental, economic
156 and societal paradigm to a sustainable one is a great challenge that requires a multi-
157 disciplinary approach to innovation in which civil society organisations, industry,
158 government and academia work together, in a quadruple helix model [14, 15], to share
159 knowledge and data among each other. In this framework, open data and software
160 represent an enabling technology [17]. Further, experts in modelling and technology
161 foresight cover a cross-disciplinary role for strategic decision-making, which
162 encompasses clearly the implementation of cleaner energy systems, but which impacts,
163 more in general, how we live, work and move in a profound way, determining potentially a
164 structural change for its adoption [54]. Built environment is considered today one of the
165 most important sectors for the implementation of circular economy models [9], which
166 can guarantee long-term development perspectives to investors and, at the same time,
167 can create multiple shared advantages [55]. Circular economy models for the building
168 sector are routed in the following main features [9]:

- 169 1. sharing of assets and flexibility in the use of spaces;
- 170 2. efficient use by delivering utility virtually (tele-working, virtualization of services
171 and processes, etc.);

- 172 3. optimal design and operation of buildings;
- 173 4. use of renewable energy sources;
- 174 5. modularity, flexibility, re-manufacturing of building components;
- 175 6. substitution of technologies with more efficient ones (energy efficient renovation).

176
177 In all these features we can identify synergies with the deployment of policies oriented
178 towards energy efficiency and renewable energy use. For this reason, it is possible to
179 envision a path of convergence between short-term economic objectives (i.e. job creation,
180 economic growth, etc.) and long-term environmental objectives (i.e. decarbonisation,
181 resource efficiency and sustainability) for the building sector. In general, improving
182 energy efficiency in multiple sectors of economy requires appropriate legislation,
183 successful market strategies and collaboration between private and public sectors. The
184 increase of energy efficiency investments with respect to present state is crucial for the
185 transition towards more competitive, secure and sustainable energy systems. More
186 specifically for the building sector, energy renovation has a relevant role today [7].
187 However, the progressive refurbishment and substitution of inefficient building stock
188 requires long-term planning. Planning should incorporate existing policy frameworks
189 for growth, employment, energy and climate in order to create an effective energy
190 renewal market that would increase employment and reduce energy demand in the
191 building sector.

192 193 **2.1 Multi-Level Perspective planning**

194 Analysing and modelling at multiple levels the dynamics previously described requires the
195 evolution of present tools and methodologies, including more adequate description of
196 techno-economic and socio-economic aspects [12, 16]. The evolution process will be
197 driven by different types of stakeholders, including prosumers [11], which can act as
198 investors on the energy market and can participate to relevant decision-making
199 processes. It is worth noticing that the techno-economic side of the problem cannot be
200 considered separately from the socio-economic side with respect to policy questions
201 regarding stakeholders' behaviour and social acceptability of technical solutions.

202 Today, technological innovation is more and more information-centric [17] and energy
203 technologies, as well, can benefit from digitization processes. The availability of large
204 scale data could potentially enable the evaluation of the behavioural and social impact of
205 technologies, giving, for example, information at multiple levels and fast feed-back on the
206 result of policies. These could, in turn, help overcoming progressively the limitations of
207 current models of technological learning which are not effective in a fast evolving
208 landscape. Often, models aimed at describing complex system derive from experts vision
209 and judgement [56] while, the direct engagement of citizens as prosumers calls for policy-
210 driven models and practices considering justice and community fairness framework [57].
211 From a practical standpoint, it is necessary to unveil, by means of data and models, the
212 connections among multiple aspects of sustainability (environment, economy and society),
213 multiple levels of analysis (e.g., technologies, infrastructures, policies) and to adopt
214 performance indicators to monitor and analyse critically the evolution of systems. Indeed,
215 key performance indicators (KPI) are essential to guide specific planning, design and
216 operation choices. As such, sustainability transitions require multi-level perspective [58]
217 and strategies to redirect the existing dynamics in economy, society and technology,
218 considering realistically all the inherent constraints which are present in the path-
219 dependent co-evolution of the social, technological, industrial and policy frameworks. An
220 example in this sense is the so-called social energy system approach [59], when energy
221 systems literacy, project community literacy and political literacy are considered together.

222 A term used in literature for this is Multi-Level Perspective (MLP) planning [12, 52, 60]
223 and considers three fundamental levels:

- 224 1. energy infrastructures (i.e. energy systems and technologies);
- 225 2. behaviour (i.e. consumer's and investor's choices);
- 226 3. institutional factor (i.e. policy, regulation, and markets).

227

228 Most of the existing tools and methodologies in the energy sector are focused on the
229 quantitative analysis of the development of energy infrastructures and systems, structured
230 on different levels of analysis. There are today very good bottom-up energy system models
231 (engineering applications and micro-economic perspective) and top-down macro-
232 economic models to support decision-making [61, 62]. However, tools and methods
233 focused on the analysis of the behaviour of consumers and investors are moderately
234 covered and deficiencies are present also in the analysis of institutional factors driving
235 decision, especially on a local scale. In other words, there is an evident difficulty in
236 consolidating top-down indications with bottom-up actions in energy systems.
237 Additionally, considering the fact that today a relevant part of the evolution of energy
238 systems depends on local and individual choices [11], the analysis of complementarities in
239 energy transitions and building energy modelling research can help overcoming these
240 issues, as will be described in more detail in the next sections.

241

242 ***2.2 Analysis of complementarities in energy transitions***

243 In order to go more in depth with respect to technological and sectorial components of the
244 problem of energy storage, we consider a framework for analysis of complementarities
245 presented in literature [53]. In this framework technology is considered as the focal
246 element and four blocks of concepts are used for its analysis: different relationships,
247 different components, different purposes and complementary dynamics. First, different
248 relationships are described by means of a unilateral/bi-lateral/absolute dependency,
249 starting from the identification of the technology that receives the benefits. This
250 dependency can have different degrees of intensity (e.g. from weak to strong) and can
251 be critical or non-critical for technology success. After that, various components have to
252 be considered for complementarities, namely technological (e.g. other technologies
253 positively affect focal technology), organizational (e.g. business models across different
254 levels of the value chain) institutional (e.g. technology support and regulatory
255 programs), and infrastructure (e.g. generic element affecting positively technology).
256 Further, different purposes can be considered, for example technological purposes when
257 the focus is reducing price or increasing performance, sectorial when the focus is
258 societal needs through the eyes of policy makers and regulatory authorities. Finally, all
259 the previous three blocks (relationships, components, purpose) have to be analysed with
260 respect to their evolution dynamics in time. In this work, considering energy storage
261 systems as the focal technology, we can identify relationships first. The most relevant
262 relationships are the ones with energy efficiency measures (on the demand side), on-site
263 generation technologies (on the supply side) and demand side management. All these
264 relationships are substantially bilateral as building systems should be conceived
265 considering cost optimal levels of performance [63] and sizing and operation strategies
266 have to be determined in an integrated way [64, 65]. The relevant modelling issues
267 involved are described in Section 3. Instead, in Section 4 a demand side management
268 and energy storage literature is presented. What we would like to stress here is the
269 possibility today of dealing with data related to energy transition processes with a much
270 wider perspective on sustainability [66]. What appears to be evident is the possibility of
271 visualizing synthetically (using appropriate tools) highly complex problems, represented

272 by multivariate data structures [67, 68], thereby, contributing to better decision-making
 273 processes, when different type of stakeholders are involved.

274

275 **2.3 The role of data-driven approaches for built environment evolution**


276 Building performance can be studied by means of Key Performance Indicators (KPIs)
 277 [66, 69-71], generally aimed at aggregating a larger set of data in a single representative
 278 quantity. KPI can be used to describe both design and operational performance. First, if
 279 we consider simulation-based optimization [64, 72] in design phase, surrogate models
 280 are considered among the most promising techniques to overcome the limitations given
 281 by the dimension of optimization problems. The choice of a specific technique can
 282 depend on several factors [73]. Further, the proper exploration of design space is crucial
 283 and, for this reason, Design of Experiments and parametric design have received an
 284 increasing attention in recent years [74, 75], consider also Building Information
 285 Modelling (BIM) for data standardization [76-78].

286 Additionally, considering multiple hypotheses in design phase appears even more
 287 important if we consider the potential gap between simulated and measured
 288 performance [48, 49, 79].

289 Going back to surrogate models, we can find in recent literature several examples of
 290 multi-variate regression models to support design optimization [80-84], considering also
 291 topics such as cost-optimal analysis [63, 85-87] and energy performance contracting
 292 [88, 89]. Figure 1 summarizes relevant steps in the design process:

- 293 1. collecting information, from general open data, to statistics and regulations;
- 294 2. processing of information, consider customer and market perspective, together
 295 with sustainability issues;
- 296 3. design (iterative search of solution);
- 297 4. evaluation with respect to selected KPIs;
- 298 5. impact in terms of performance and cost, considering life cycle.

299

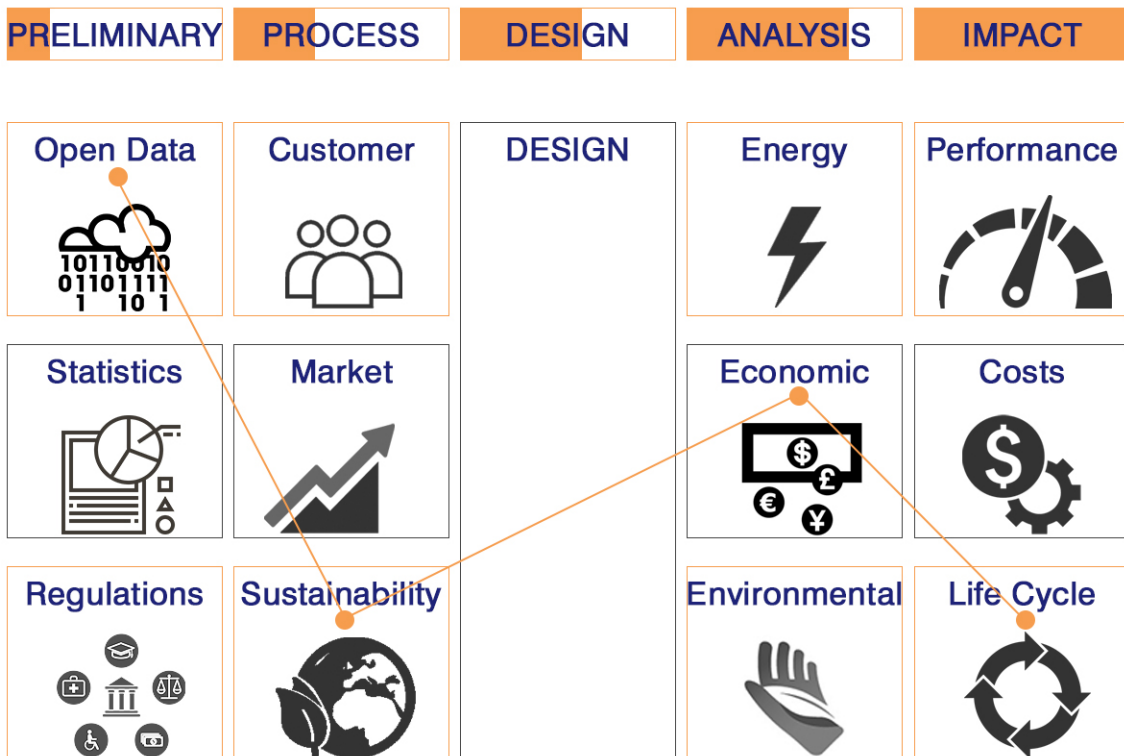

300
301

Figure 1: Design process phases and interaction among fields.

302 Figure 1 can be read horizontally following the different perspective of stakeholders and
303 users. Indeed, first line mainly refers to users and owners and the second one characterized
304 by black-contour boxes can be handled as the development of an economic issue from the
305 initial statistics to its final cost inventory. Furthermore, the third line shows the main
306 regulations, targets and lifespan perspective considering the new object to design, i.e. the
307 building, as an added value to people and eco-system. As already mentioned, the design
308 process is iterative and has to exploit multiple feedbacks.
309 Finally, with respect to operation phase issues, relevant elements for the choice of
310 surrogate modelling techniques are:

- 311 1. conceptual simplicity and ease of implementation [90], with temperature as the
312 main regressor [91] and energy balance control [92];
- 313 2. automated or partially automated model selection [47, 93], including testing
314 methodology [94-96];
- 315 3. ability to account for the impact of different operational strategies and conditions
316 [97-99], considering different levels of thermal inertia [100];
- 317 4. scalability and applicability with respect to different types of end-uses [101] and
318 multiple temporal [102, 103] and spatial scales [104-108];
- 319 5. visualization of the impact of users' behaviour [98];
- 320 6. model robustness testing, under different behavioural conditions, using Monte
321 Carlo simulation [99];
- 322 7. use of Bayesian analysis [109, 110].

323

324 Different energy modelling approaches in the built environment are described more in
325 detail in the next section.

326

327 **3 Energy modelling in the built environment**

328 Energy dynamics in the built environment can be described by means of different
329 modelling approaches. Models can be used for multiple purposes and in multiple
330 applications during building life cycle [111]. Modelling research, if properly oriented
331 [17, 112] can foster multi-disciplinary collaboration and the typical applications range
332 from design phase simulation [75, 77] to energy management, fault detection and
333 diagnosis [113], optimal control [114, 115], etc. Further, building energy models can be
334 used in combination with other energy models (e.g. district or city energy models) to
335 optimize interaction with infrastructures [38, 116, 117], or to analyze sectorial level
336 policies [118]. In many cases, the underlying models can be formulated as optimization
337 problems [64], i.e. simplified and with a transparent and explicit formulation of
338 optimization objectives (e.g. energy, cost, emission, etc.) that can scale up to district
339 [119] and city [120] scales. The fundamental goals of these models are sizing and
340 defining schedules of operation [121] under economic and environmental constraints.
341 When multiple objectives (more than two/three) or criteria have to be considered
342 simultaneously, further simplifications are possible, like weighting different objectives
343 with factors [122], or relying on boundaries given by data envelopment [123]. The use
344 of appropriate simplifications and model reductions can ease the process of
345 implementation and the use of robust and scalable computational techniques to respond
346 to technical problems within the Internet of Things (IoT) paradigm [124]. In fact, IoT
347 solutions could open up new perspectives related to data analytics in the built
348 environment. However, the problem of modelling integration should be necessarily
349 addressed by research to ensure the consistency of the proposed solutions with the needs
350 at the technological and sectorial level [53]. In the following sections a synthesis of the


351 state of the art of modelling is presented together with a discussion on some of the
352 relevant challenges that energy modelling faces at present.

353

354 **3.1 State of the art of energy modelling**

355 In literature we can find different papers depicting in detail the current state of the art of
356 building energy performance modelling [118, 125-127]. Further, a description of the
357 evolution of research in the sector can be found as well [128-130]. A synthetic scheme
358 reporting the relation among relevant categories describing building energy modelling
359 approaches is presented in Figure 2, considering general classification (top-down vs
360 bottom-up) [131], technological and sectorial level perspectives (engineering,
361 econometric, technological), model type (law driven vs data driven), and finally level of
362 transparency with respect to the description of underlying phenomena, from more
363 (white-box) to less transparent (black-box).

364

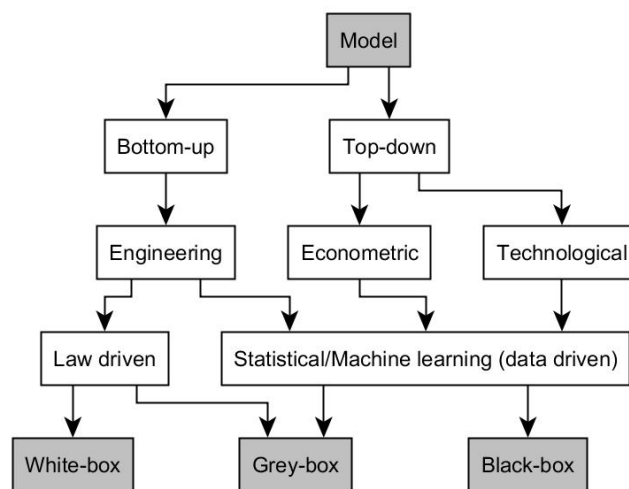

365

366

367

Figure 2: Synthesis of the state of the art of building energy models

368 What appears to be particularly important today is the possibility of selecting modelling
369 approaches based on their suitability with respect to application criteria [73]. Further, it
370 is necessary to establish boundaries for the validity and acceptability of models' results,
371 for example using verification and validation standards [20, 132], together with
372 calibration protocols [133]. Additionally, availability of information, appropriate
373 data/meta-data structures and software emerge as recurrent elements in recent research
374 [17], indicating possible directions for future development. We can identify similar
375 elements in literature envisioning the evolution of building energy models [134-136]. In
376 this sense, it is also necessary to stress the importance of the ongoing research on
377 automation systems in buildings, which can represent an enabling technology for
378 detailed data acquisition and processing on a continuous base. However, there exist
379 several issues limiting the development of innovative and cost-effective solutions in
380 building energy management and automation systems [114, 115], among others:

381

382

383

384

385

386

1. lack of model flexibility and customization to specific problems and conditions (need for parametric/probabilistic analysis in design phase and continuity with calibration in operation phase);
2. lack of coordination of models across life cycle phases;
3. lack of feedback to improve processes and technologies incrementally at multiple scales;

387 4. lack of use of technological paradigms such as IoT [124] and Linked Open Data
388 to foster collaboration and emergence of innovative solutions from building data
389 analytics.
390

391 In the next section research challenges are presented together with a selection of
392 research features, considering transversal topic emerging from recent literature
393 highlighting open questions [137-140] for future built environment.
394

395 **3.2 Challenges for energy modelling**

396 Energy efficiency increase strengthens the interdependency between design and
397 operational optimization of systems (as it tightens performance boundaries), across
398 multiple scales of analysis. This, consequently, determines the need for more formalized
399 approaches to the use of optimization models in energy research and practical
400 applications [18], together with a greater level of coordination and scalability in the
401 underlying objectives, as mentioned before. Modularity, scalability and possibility of
402 decomposition of energy models are crucial to reduce complexity and to obtain simple
403 but reliable representations of real phenomena. We can ideally represent building
404 energy behaviour across multiple scales of analysis (where energy and mass balance can
405 be used as a scalable principle for model construction, verification, validation and,
406 eventually, calibration), while maintaining a certain degree of alignment with respect to
407 information. For example, we can view aggregations of building as loads for
408 infrastructures (electricity, gas, water, district heating and cooling networks) and energy
409 hubs/multi-energy systems [116, 117]. We can also analyze building behaviour at the
410 meter level (electricity, gas, water, heating and cooling) [25, 141] or technical systems
411 level (building services). Further, we can consider a subdivision up to the thermal zone
412 level or even individual building components [101]. Finally, we can analyze the energy
413 and mass balance of human body [142, 143], with respect to activity and environmental
414 conditions (i.e. embodying user perspective in modelling).

415 If model simplifications and approximations are correctly chosen, it is possible to
416 quantify reliably energy fluxes at multiple scales, following the chosen hierarchical
417 decomposition strategy and identifying useful insights that could orient further
418 investigations with more detailed modelling approaches [144], where and when
419 necessary. Examples in this sense can be found in literature for building components
420 and thermal zones [145], technical systems [38] and interaction between buildings and
421 infrastructure [116, 117]. While having been created for different purposes, these
422 examples highlight the possibility of integrating models at multiple scales of analysis
423 and for different purposes, as proposed in recent literature [112]. Going back to
424 applications, energy efficiency measures can create multiple advantages [7, 8, 55] and
425 building sector potential is particularly relevant [22]. At present, both design and
426 operation optimization in energy systems are active research fields. Among the most
427 relevant issues studied in literature we can find at building scale:

- 428 1. techno-economic optimization strategies for integrated design of buildings [85];
- 429 2. optimization strategies for building operation [146, 147];


430

431 In parallel, at district/neighbourhood and urban scales:

- 432 1. techno-economic design optimization of decentralized multi-energy system [35,
433 36, 119];
- 434 2. optimization strategies for decentralized multi-energy systems operation [116,
435 117].

436

437 It is worth recalling the fact that, with respect to energy transitions planning, built
 438 environment can represent an intermediate scale of analysis, collocated between
 439 infrastructures and users/investors, according to Multi-Level Perspective planning
 440 framework. A tight integration and comparability among different models should be
 441 present as well to perform effectively multiple tasks in different building life cycle phases
 442 [111]. For this reason, we should be able to pass from models to simulated data (model
 443 output, forward approach) and from measured data back to models (model input, inverse
 444 approach), in multiple ways.
 445 In terms of methodological approach, continuous improvement by learning from
 446 feedback is the key for evolution, because (in energy modelling) we generally rely on
 447 multiple simplifications and approximations that can be improved progressively, by
 448 acquiring new evidence. This principle can be incorporated in building energy
 449 modelling research by considering the possibility of using both forward and inverse
 450 modelling approaches in a synergic way [98, 99], thereby establishing a continuity in
 451 the use of energy models across life cycle phases and across scales, considering the
 452 suitability of different modelling approaches, from white-box to grey-box and black-box
 453 [73]. A synthetic scheme representing an example of integration of forward and inverse
 454 modelling approaches for continuous improvement is represented in Figure 3.
 455

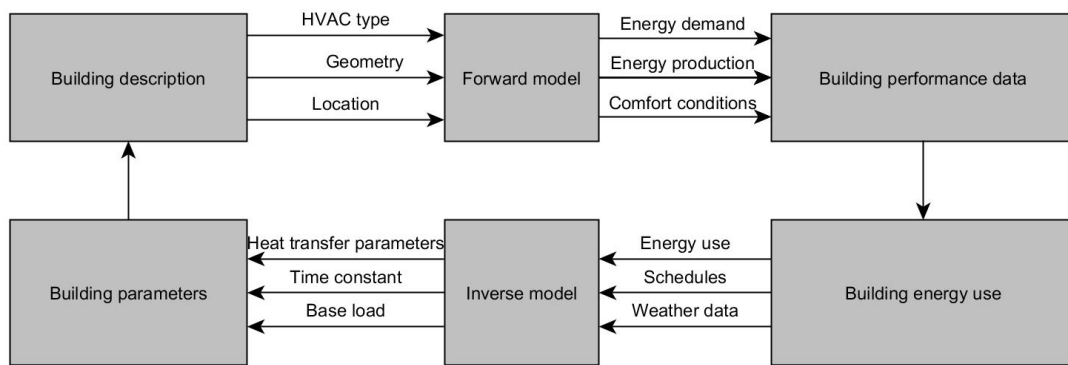

456
 457 *Figure 3: Forward and inverse modelling integrated workflow (for continuous*
 458 *improvement).*
 459

460 Hereafter, we present a selection of features that can be considered in building energy
 461 modelling research to address current and incoming challenges:

- 462 1. integration of multiple domains in terms of simulation capabilities;
- 463 2. separation of domain specific concerns and possibility to derive useful insights for
 464 more specialized analysis;
- 465 3. creation of a hierarchy in information and attribution of weights to different
 466 aspects (easing numerical and visual interpretation of results);
- 467 4. holistic perspective with integration of information at multiple levels;
- 468 5. creation of continuous learning and improvement cycles across building life cycle
 469 phases;
- 470 6. identification and selection of empirically grounded simplifications;
- 471 7. definition of transparent optimization objectives (i.e. energy, cost, emission, etc.);
- 472 8. consistency with state-of-the-art modelling in terms of validity, reliability,
 473 acceptability, suitability;
- 474 9. exploitation of scalable computing techniques and theoretical properties which
 475 enable faster calculations and guarantee optimality of solutions.
 476

477 The importance of these features appears even more evident if we think about the
 478 problem of optimal interaction of buildings with infrastructures [11] both in a
 479 technological and sectorial perspective but also, more in general, if we think about new
 480 businesses enabled by data analytics in the built environment. In order to depict the
 481 potential of the combined use of data analysis techniques at multiple scales we report in
 482 Table 1 an analysis of indicators used in Sustainable Energy Action Plans [120], with
 483 respect to related technical questions and actions. The corresponding technical questions
 484 at the building level are reported in Table 2.
 485
 486

Table 1: Urban scale analysis – Sustainable Energy Action Plans (SEAP)

Urban indicators (SEAP)	Questions	Actions
Energy demand (Demand for energy carriers in the different final energy uses)	What is the expected final energy use of an urban area and the energy spent on different uses in kWh/year and per square metre? What is the baseline energy performance of buildings and urban areas? What is the heating/cooling demand for different energy carriers in kWh/year and per square metre?	Norms for spatial & urban planning with energy-efficient requirements Standards & labelling Tax reductions, tax credit, soft loans to fund energy-efficient actions Contractual agreements with Energy Service Companies (ESCOs)
Energy supply (Energy carriers and share of local energy from renewable energy sources)	What is the percentage of renewables in the total energy supply (%)? What is the annual amount of renewable energy produced with respect to the total energy supply? What is the share of each technology in the annual production of renewable energy?	Spatial & urban planning, considering RES integration Tax reductions, tax credit, soft loans to fund energy renewable actions Contractual agreements with Energy Service Companies (ESCOs)
Environmental impact (CO ₂ emissions and reductions compared to the baseline)	What are the total CO ₂ emissions per year in a city district, in an urban area, and in specific buildings? What is the difference in CO ₂ emissions and in energy demand/consumption for different improvement scenarios compared to the baseline? How to select the most convenient improvement, according to a set of indicators?	Multi-criteria analysis of different energy-improvement scenarios with respect to carbon emission
Economic impact (Energy costs/economics)	What is the cost of supply by energy carrier? What is the cost of supply by final energy use for each dwelling, building or the whole area? What are the investment and maintenance costs of the improvement scenarios? Number of households in energy poverty? Economic effort of energy consumption per household?	Tax reductions, tax credit, soft loans to fund energy-efficient actions. Capital or operating grants and subsidies for low income households Feed-in tariffs Subsidies for families at risk of energy poverty

487
 488 Techniques reported in Table 2 represent simply a subset of all the possible techniques
 489 that can be found in literature for these technical problems, but we can identify how
 490 multiple technical questions can be addressed by using the combination of a few
 491 computational techniques:

- 492 1. clustering [148, 149];
- 493 2. piece-wise linear multivariate regression [47];
- 494 3. linear multi-variate regression [92, 101];
- 495 4. time-series analysis [150];

496 5. model predictive control [146, 147].

497

498

Table 2: Building scale analysis – Technical questions and data analysis techniques

Questions	Technique 1	Technique 2
How can we aggregate geographically building data (e.g. aggregation of data at the district/neighbourhood and urban scale)?	Clustering	-
How can we aggregate non-geographically building data (e.g. aggregation of similar buildings in terms of shape, age, end use, business activity, etc.)?	Clustering	-
Which building parametric data (e.g., building characteristics, operational activities and occupant behaviour) is the most useful for predicting building energy use?	Multi-variate regression	-
How can we benchmark the relative building energy performance within the portfolio?	Multi-variate regression	-
What percentages of the total energy use are due to base load, heating use and cooling use, respectively?	Variable base degree-days (energy signature, piece-wise linear model)	-
What are the potential improvement opportunities?	Variable base degree-days (energy signature)	Multi-variate regression
How can we optimize the design of technical systems (using energy signature to improve design of technical systems)?	Variable base degree-days (energy signature)	Multi-variate regression
What are the root causes for less efficient buildings?	Variable base degree-days (energy signature)	Multi-variate regression
How can we discriminate weather dependent/independent behaviour, and perform improvement tracking and energy savings from retrofit activities?	Variable base degree-days (energy signature)	-
How can we detect abnormal energy use in the historical energy use data?	Variable base degree-days (energy signature)	Time-series analysis
How much energy do we expect to use in the future?	Variable base degree-days (energy signature)	Time-series analysis
How do we analyze the real operating conditions of building and people behaviour?	Clustering	Time-series analysis
How can we use MPC in buildings and positively interact with end-user (zonal modelling) and energy infrastructures (technical systems and metering problem, multi-level view)?	Time-series analysis	Model Predictive Control (MPC)/Optimization

499

500

3.3 Techno-economic optimization issues

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

Economic criteria have to be always considered in modelling, to ensure the feasibility of technical solutions. However, in cost-optimal analysis of building systems [151] different criteria are considered simultaneously, because a simple minimization of initial investment cost wouldn't be appropriate to promote high efficiency solutions. From the technological point of view, buildings are composed by several subsystems, but optimized solutions, involving design and operation choices, have to account for the performance at the system level in its life cycle (or in an appropriate time frame of analysis). Primary energy, carbon dioxide emission and comfort are other essential categories of performance indicators to be considered in this sense, together with initial investment and operation cost. Further, techno-economic evaluations can be conducted according to different perspectives. Private investors act according to a micro-economic perspective, trying to maximize the net present values of their investments (or other economic indicators) under constraints, while institutional actors and investors act, in general, according to a macro-economic perspective, looking at the whole system. This issue is particularly relevant for demand side management and energy storage systems, as will be discussed in detail in the next section. Additionally, energy modelling is multi-disciplinary and cross-sectorial and built environment applications can share, at least, a similar methodological approach with other

518 sectors of final energy use, such as industrial processes [152] with respect to accounting,
519 simulation and optimization models and tools. This is important, for example, if we think
520 about the electrification of heat and mobility demands, together with the introduction of
521 multi-energy systems [35] and energy hubs [36, 37]. However, relevant specific issues
522 for the built environment have to be considered. In fact, despite the technical potential and
523 the possibility of defining metrics to evaluate problems transparently at multiple scales,
524 the appropriate simultaneous consideration of multiple criteria in technological choices
525 [122], on the one hand, and initial investment cost, on the other hand, remain critical
526 dimensions: buildings are generally designed, constructed and operated by different
527 entities (often with conflicting needs and different responsibilities) and conventional
528 financing schemes are not generally appropriate in this sense, e.g. to account in detail
529 for the investment risk determined by inefficiencies [88]. Costs across the building life
530 cycle are distributed among different actors and processes (with different perspectives)
531 because buildings are long-term assets. Further, people behaviour [98, 99] and comfort
532 preferences [98, 153] constitute additional elements of uncertainty which are
533 particularly relevant with respect to the interaction with infrastructures [154]. All these
534 factors can lead to a consistent gap between predicted and actual performance, which
535 should be properly considered and analysed [48, 79].

536
537

538 **4 Demand side management and energy storage systems**

539 As described before, high efficiency building paradigms combine a drastic energy
540 demand reduction with on-site or nearby renewable energy supply. Primary energy and
541 emission factors coefficients [20] assumed in accounting the impact of delivered and
542 exported energy from the building, as well as the normative requirements in terms of
543 on-site and nearby energy production, will play an essential role for the evolution of the
544 built environment, considering both code compliance and operation management. Of
545 course, the increase of penetration of weather dependent RES will determine a
546 considerable change in the weighting factors used for accounting the energy exchange
547 with the grid [155], which depends on the ability of the electric system to use the energy
548 produced in a specific moment in time (determining the need for a dynamic calculation
549 and time-series data) as well as on the conversion efficiency of storage systems. As
550 specified in the introduction, storage systems are essential to balance the mismatch
551 between production and demand (load matching [141]), i.e. to decouple them
552 temporally and spatially. Further, in the building sector, the increasing electrification of
553 heating, domestic hot water and mobility demands is important to enhance the
554 penetration of RES, but the seasonal distributions of heating and cooling demands (and
555 the related needs for long-term storage) create bottlenecks for the deployment of
556 conventional electric storage solutions, which are mainly conceived for short-term
557 storage (daily/weekly). Therefore, in spite of the techno-economic feasibility of high
558 efficiency new and retrofitted building, the positive effect of innovative practices at the
559 sectorial level could be strongly inhibited by the absence of a proper co-evolution of
560 built environment and infrastructures, in particular electric grid. Effective demand side
561 management at the building stock scale can contribute to the increase of reliability and
562 financial performance of electrical power systems [156].

563
564

564 **4.1 Technological issues overview**

565 In this section we consider the role of demand side management (DSM) together with
566 that of energy storage systems. DSM refers to changes on the demand side of energy
567 systems, considering both technological and behavioural changes, thereby including

568 several different practices. Demand side management [157] should be the starting point
569 in energy transitions, because demand reduction is crucial for creating more reliable and
570 sustainable energy systems. From a systemic point of view, storage technologies can be
571 described as elements that allow to store excess energy in time intervals with high
572 production and low demand and that allow to reconstitute energy in time intervals with high
573 demand and low production. Within DSM we can consider demand response (DR)
574 strategies which are an adjustment of power demand obtained by load shifting and
575 curtailment. From a conceptual point of view, DR can act in a similar way to energy
576 storage, but has an important advantage. No actual charge/discharge process happens, as
577 no conventional storage technology is involved and there is no impact of the material
578 and resources used for the production of storage technology [158]. Substantially, DR
579 acts in terms of load shifting for “peak clipping” (high demand) and “valley filling”
580 (low demand) in load curves of electric system. The main weakness of DR is that the
581 technical constraints, due to the temporal distribution of coupled processes, do not allow
582 an unrestricted usage of its theoretical potential. In general, the result of DSM strategies
583 depends on both technical potential and social acceptance and, therefore, it is important
584 to understand the specific features of end-uses and their temporal scheduling. Further,
585 DSM deployment should be supported by price-based or incentive-based schemes
586 aligned with the policies’ targets [159].
587 Additionally, the current evolution towards decentralized energy systems [35, 36]
588 implies the necessity of creating an interplay among different sectors of the demand and
589 different energy carriers. Of course, it is important to consider both the temporal and
590 spatial distribution of demand (e.g. load profiles, load duration curves, etc.) and the
591 proportion of the demand with respect to different energy carriers. A synthesis of the
592 interplay among energy storage systems and energy carriers is represented in Table 3.

593
594 *Table 3: Energy storage systems and energy carriers interplay*

Technologies	Carriers			
	Electricity	Fuels	Heating	Cooling
Pumped hydroelectric	X			
Batteries	X			
Other storage technologies (flywheels, supercapacitors, compressed air)	X			
Demand response	X			
Power-to-Hydrogen/Power- to-Gas	X	X		
Power-to-Heat with thermal storage	X		X	
Heat Pump with thermal storage	X		X	X

595
596 Actually, energy storage systems reported before are a combination of technologies,
597 where both conversion and storage processes are present. Beyond electricity, the
598 possibility to store energy in the form of fuels (hydrogen/methane) [32-34] or thermal
599 energy (heating and cooling) [160] for a long-term, could open new possibilities for
600 energy efficiency, considering the demand of energy carriers clustered on spatial and
601 temporal scales. This highlights again the importance of the scalability of models,
602 introduced in the previous section. In fact, in the definition of design and operation
603 strategies, multiple perspectives have to be considered, from infrastructures (supply
604 side) to end-users (demand side). A synthesis of the possible adoption of different
605 energy storage systems is reported in Table 4 with respect to infrastructures and end-
606 uses (sectors of demand). As described before, the spatial and temporal distribution of

607 demand is crucial, as many of the technologies reported are suitable for short-term
608 storage, while others are suitable for long-term storage. In particular, batteries can be
609 appropriate to balance daily/weekly variations but they are not techno-economically
610 feasible, at present, for monthly/seasonal storage, which could be necessary to enable
611 further development of the high efficiency building paradigms (e.g. NZEBs), for the
612 reasons outlined in the previous section.

613
614

Table 4: Energy storage systems with respect to infrastructures and end-uses

Technologies	Infrastructures			End-uses			
	Electric grid	Natural gas grid	Fuel supply	District heating/cooling	Buildings	Industry	Transport
Pumped hydroelectric	X						
Batteries	X				X	X	X
Other storage technologies (flywheels, supercapacitors, compressed air)	X						
Demand response	X				X	X	
Power-to-Hydrogen/Power-to-Gas	X	X	X				
Power-to-Heat with thermal storage	X			X	X	X	
Heat Pump with thermal storage	X			X	X	X	

615
616
617
618
619
620

Finally, conversion efficiency is another essential element to be considered in modelling. Sample data of conversion efficiencies for energy storage systems presented in recent literature are reported in Table 5.

Table 5: Energy storage systems and efficiencies

Technologies	Efficiency		
	Electrical	Heat-recovery	Round-trip
	%	%	%
Pumped hydroelectric	87 [161]	-	75-85 [162]
Batteries	85 [163]	-	75 [164]
Other storage technologies (flywheels, supercapacitors, compressed air)	70-79 [165]	-	54 [166]
Demand response	70 [167]	-	52 [168]
Power-to-Hydrogen/Power-to-Gas	32 [33]	50 [33]	45-60 [169]
Power-to-Heat with thermal storage	-	98 [170]	98 [171]
Heat Pump with thermal storage	-	95 [171]	300 ¹ [172]

621
622
623
624
625
626
627
628
629

4.2 Technological and sectorial level complementarities

As already introduced, optimal design and operation problems are more and more integrated [35, 173] and it is necessary to consider techno-economic optimization from multiple perspectives (macro and micro). As described in Section 2, strategies for energy transition are necessary from a systemic point of view (macro-economic perspective) but, with respect to energy efficiency practices, the point of view of investors has to be considered (micro-economic perspective). As introduced in Section 2.2, analysing purpose in technological and sectorial level complementarities is a matter

¹ Heat pump efficiency is conventionally computed as COP [35] without considering energy extracted from air, ground, groundwater, etc.

630 of perspective (e.g. technological when the focus is reducing price or increasing
631 performance, sectorial when the focus is societal needs through the eyes of policy
632 makers or authorities). Clearly, different business models, in terms of fees, taxes and
633 incentives, can open different scenarios with respect the design and operation of
634 technologies. In fact, investors analyze business cases before investing and this type of
635 investment has to be profitable over a reasonable time frame. The aggregation of
636 prosumers on a local base (district/neighbourhood) could help finding economies of
637 scale for the adoption of on-site generation and storage technologies integration in the
638 built environment. These economies of scale are determined both by sizing optimization
639 and by lower cost with respect to individual installations. As already described, cost-
640 optimal analysis in Section 3.3 as well as other techno-economic optimization
641 approaches consider generally multiple indicators such as cost, energy and emission
642 simultaneously at multiple scales, from single buildings, to neighbourhoods and cities.
643 First, an important topic is the availability of updated dynamic time series data of
644 primary energy and emission factors at national scale [174, 175]. At the technological
645 level, large scale deployment of storage requires overcoming current major barriers, i.e.
646 the actual costs, material stability, reliability, durability, and safety [176]. Further, size
647 and location of storage solutions constitute relevant constraints at building scale [164].
648 For example, at the building scale there can be an interplay between electrical and
649 thermal storage options [177]. While there exist clear business models for electricity
650 storage [178], this is not the case for thermal storage, considering in particular the
651 regulatory environment and the cost of commodities [179]. Electricity storage planning
652 is part of the evolution of infrastructures [180]; in this sense, analysing and predicting
653 the mismatch between production and demand (and their cycles) [181] is crucial to
654 determine the size and operational strategies for multi-fuel and multi-output energy
655 systems [37]. The advantages offered by Community scale systems can be easily
656 demonstrated [182] but the most important barrier for large scale storage deployment
657 remains investment cost [183], considering also critically other sectorial barriers at the
658 policy level [184, 185], even though a decreasing trend in costs has been observed
659 [186].
660 On the other hand, demand response and flexibility programs [187] rely on the
661 predictive ability of building-to-grid models. Demand flexibility can be evaluated in
662 terms of amount, time and power as well as cost. Moreover, when merging electricity
663 and heat demand as for electricity-driven heating systems, a new degree of freedom is
664 introduced. For this reason, a recent research proposed new performance indicators like
665 the instantaneous power flexibility [188]. As already mentioned, Community scale
666 solutions allows to benefit both from economies of scale and diversity of load profiles
667 to smooth peaks and enhance performance [189], when high penetration of renewables
668 happens [190]. Additionally, in terms of aggregation and diversification, it is important
669 to consider concepts such as aggregators, virtual power plants [191], and prosumers
670 [192]. The diversity of building operational profiles [193] should be considered in
671 particular with respect to the thermal inertia of both building fabric and heat storage
672 systems [194]. An additional element of uncertainty is given by the variability of
673 building fabric performance in real conditions [195]. However, automation technology
674 at the building scale can help reducing energy consumption while satisfying safety,
675 comfort, and productivity [196] requirements. Finally, an increasing quota of electric
676 load from transportation at the building level should be accounted as well [197, 198].
677 Going back to the sectorial level, the trade-offs between revenue and emissions
678 determined by energy storage operation (e.g. due to low round-trip efficiency of
679 storage) are another important factor [199] that has to be evaluated together with the social

680 opposition to capacity expansion [200], creating more coherent planning processes.
681 Finally, in terms of performance metrics LCOE, acronym for Levelized Cost Of Energy
682 and Electricity [201] and LCOS, acronym for Levelized Cost Of Storage [202, 203] are
683 generally used. An overview of values for LCOE metric for storage systems is reported
684 in the next section.

685

686 *4.3 Levelized Cost of Energy metric*

687 In building thermal applications, the reference energy cost for storage systems should be
688 in the range of 0.60-1.43 EUR/kWh [204]. Seasonal thermal energy storage with up to 2
689 cycles per year show performance around 3.00 EUR/kWh [205]. If the building is
690 connected to a Community Energy System such as District Heating, the performance
691 fits into the previously mentioned range [206]. When subsidies or incentive schemes are
692 set up, especially in the field of solar energy and electrical battery as storage option,
693 currently the cost is between 0.74 and 0.98 EUR/kWh and decrease is expected for the
694 next years leading to a range of 0.17 to 0.27 EUR/kWh [207]. In a PV battery system
695 not all energy needs to pass through the storage, thus the resulting average cost of
696 directly-consumed and stored electricity will be even lower. Without dedicated
697 supporting tariffs, current battery module prices within optimized system configurations
698 still do not lead to profitable investments such as Li-Ion batteries for solar energy
699 storage with daily cycles of operation. However, batteries remotely controlled by an
700 aggregator can help balancing daily renewable intermittency and their profitability can
701 rises further [208]. Among battery technologies, Lead Acid battery in stationary systems
702 are well-established but could be considered the past in comparison to new advanced
703 hybrid Lead Acid Ultrabattery or other technologies, such as Nickel Zink (NiZn). Their
704 LCOE is 0.81 EUR/kWh. Redox Flow battery can decrease the storage cost to 0.52
705 EUR/kWh and Lithium Ion even to 0.16 EUR/kWh [209]. The first one is not deployed
706 on a large scale and is not established in the market while the second is mainly used for
707 non-building applications.

708 On the other hand, an outlook of thermal energy storage in terms of costs can be
709 interesting. The road towards well-insulated and low-temperature heated buildings
710 offers the chance for small scale low temperature heat storage with capacity costs of
711 0.60 and 0.53 EUR/kWh for the closed and open system, respectively [204]. They can
712 be considered affordable for the building sector, being in the range previously
713 discussed. However, a large part of existing buildings does not comply with those
714 temperature supply requirements and needs further adjustments in terms of space and
715 construction implying additional investment costs. Indeed, there are thermochemical
716 energy storage materials with potentially high energy density, i.e. up to 1510 MJ/m³,
717 and long-term storage ability, but not economically viable in buildings at present.
718 Successful and high-performance ones show prices between 350 to 3600 EUR/m³ at
719 laboratory test scale. Those values are, then, doubled by installation of further
720 components and associated inefficiencies such as heat exchangers and hydraulics [210].
721 The overall results they achieve (converted in EUR/kWh of stored energy) are far from
722 the suitability range reported before. A complete heat storage system based on sensible
723 heat technology costs from 0.1 to 10 EUR/kWh of capacity, depending on the size and
724 the insulation technology. Conversely, better performing materials with high latent heat
725 capacity, such as Phase Changed Materials (PCM), and Thermo-Chemical Storage
726 (TCS) systems show relatively higher costs, due to the heat and mass transfer applied
727 technologies. A system equipped with PCM technology ranges from 10 to 50 EUR/kWh
728 whereas the TCS ones from 8 to 100 EUR/kWh [211]. Values of electricity and thermal
729 energy storage cost are summarized in Table 6, linking them with research in electricity

730 infrastructure including new factors and strategic enhancement as spatial distribution,
 731 dispatch mode and Grid interaction [212]. Indeed, IRENA report mainly dealt with
 732 battery technologies [213].

733
 734

Table 6: Levelized Cost Of Energy for building applications

Technologies	Electricity			Heat			Reference
	LCOE _{min}	LCOE _{max}	Constraint	LCOE _{min}	LCOE _{max}	Constraint	
	[€/kWh]	[€/kWh]		[€/kWh]	[€/kWh]		
Lead Acid Battery	0.74	0.98	Spatial	-	-	-	[207]
Nickel Zink Battery	0.81	2.8	Technology	-	-	-	[209, 213]
Lithium Ion Battery	0.16	2	Lifespan	-	-	-	[209, 213]
Redox Flow Battery	0.52	4	Technology	-	-	-	[209, 213]
Aquifer Thermal Storage	-	-	-	0.53	3	Spatial	[204, 205]
PCM-assisted Thermal Storage	-	-	-	10	50	Cost	[211]
TCS Thermal Storage	-	-	-	8	100	Cost	[211]

735
 736
 737
 738
 739
 740
 741
 742

A further element of interest is observed in a research by NREL [214] that highlights PV plants designed with storage from the very beginning have a lower life cycle cost than PV plants where the storage is added in a successive phase. Therefore, the adoption of storage should possibly be considered among the design options from the very beginning.

743 5 Conclusion

744 Research and development in energy transitions should necessarily face techno and
 745 socio-economic problems. Energy use and technology affect sustainability in all its
 746 fundamental components, society, environment and economy. Conventional energy
 747 planning and technological learning models are not sufficient because of their inability
 748 to deal with issues such as the behaviour of consumers, prosumers and investors, as well
 749 as the institutional factors driving decision-making processes, especially at the local and
 750 individual level. Further, the fast evolving technological landscape creates additional
 751 complexity and these issues inherently highlight how built environment could represent
 752 a suitable intermediate scale of analysis in Multi-Level Perspective planning of energy
 753 transition, being collocated among infrastructures and users. Research should be done to
 754 indicate possible innovation pathways for the co-evolution of built environment and
 755 infrastructures, starting from the current state of the art of multi-scale energy modelling.
 756 In this sense, the concept of analysis of complementarities is particularly powerful.
 757 Optimal design and operational choices at the building level are systemic, to accomplish
 758 the presence of multiple technologies and needs, but buildings are, at the same time,
 759 nodes in infrastructural systems. It is particularly important to investigate the spatial and
 760 temporal scalability of modelling techniques by means of transparent metrics and KPI;
 761 in this paper we highlighted the scalability of techniques for techno-economic
 762 optimization and the scalability of inverse modelling techniques for model calibration
 763 aimed at energy management. Models can be improved on a continuous basis,
 764 considering forward and inverse approaches integration (i.e. using them in multiple
 765 applications during building life cycle), using validation and calibration standards at the
 766 state of the art. However, specific issues have to be considered for built environment
 767 applications. Buildings are long-term assets and, for this reason, it is necessary to

768 establish a methodological continuity among modelling practices for optimal design and
769 operation (as indicated before), aimed at reducing the gap between simulated and
770 measured performance of buildings.

771 The role of models in the energy field is cross-sectorial and the use of common
772 principles and techniques could stimulate a rapid development of multi-disciplinary
773 research (e.g. multi-model “ecologies”, open data, etc.), which is an essential part of
774 innovation. Modelling research should provide useful insights on problems,
775 accommodating multiple perspectives of stakeholders involved in decision-making
776 processes. Again, this is particularly evident with respect to the problem of storage in
777 energy systems with high penetration of RES, whose scope is, substantially, the spatial
778 and temporal decoupling of energy supply and demand. Finally, the potential synergies
779 among energy efficiency measures, renewable energy technologies, demand side
780 management and storage systems at the sectorial level are evident but we need to be
781 able to propose market effective solutions that can minimize the life cycle economic and
782 environmental impact and, at the same time, that can represent a good compromise with
783 respect to the different perspectives of stakeholders, in terms of socio-technical
784 acceptability.

785

786 **References**

- 787 [1] BPIE. Europe’s buildings under the microscope. Buildings Performance Institute
788 Europe (BPIE); 2011.
- 789 [2] IEA. Technology Roadmap Energy-Efficient Buildings. Heating and Cooling
790 Equipment. International Energy Agency (IEA); 2011.
- 791 [3] Dodd N, Donatello S, Garbarino E, Gama-Caldas M. Identifying macro-objectives
792 for the life cycle environmental performance and resource efficiency of EU buildings.
793 JRC EU Commission; 2015.
- 794 [4] Newbery D, Pollitt MG, Ritz RA, Strielkowski W. Market design for a high-
795 renewables European electricity system. Renewable and Sustainable Energy Reviews.
796 2018;91:695-707.
- 797 [5] Nässén J, Holmberg J, Wadeskog A, Nyman M. Direct and indirect energy use and
798 carbon emissions in the production phase of buildings: An input–output analysis.
799 Energy. 2007;32:1593-602.
- 800 [6] EUSSD. European Commission, Environment, Sustainable Buildings
801 (<http://ec.europa.eu/environment/eussd/buildings.htm>), accessed 20/04/2017. 2017.
- 802 [7] Saheb Y, Bodis K, Szabo S, Ossenbrink H, Panev S. Energy Renovation: The
803 Trump Card for the New Start for Europe. JRC EU Commission; 2015.
- 804 [8] EEFIG. Energy Efficiency – the first fuel for the EU Economy, How to drive new
805 finance for energy efficiency investments Energy Efficiency Financial Institutions
806 Group; 2015.
- 807 [9] McKinsey. Growth Within: A Circular Economy Vision for a Competitive Europe.
808 McKinsey Center for Business and Environment; 2014.
- 809 [10] IBM. The Economy of Things - Extracting new value from the Internet of Things.
810 IBM Institute for Business Value; 2016.
- 811 [11] Rodríguez-Molina J, Martínez-Núñez M, Martínez J-F, Pérez-Aguilar W. Business
812 Models in the Smart Grid: Challenges, Opportunities and Proposals for Prosumer
813 Profitability. Energies. 2014;7:6142.
- 814 [12] Geels FW, Kern F, Fuchs G, Hinderer N, Kungl G, Mylan J, et al. The enactment
815 of socio-technical transition pathways: A reformulated typology and a comparative

816 multi-level analysis of the German and UK low-carbon electricity transitions (1990–
817 2014). *Research Policy*. 2016;45:896-913.

818 [13] Sovacool BK, Geels FW. Further reflections on the temporality of energy
819 transitions: A response to critics. *Energy Research & Social Science*. 2016;22:232-7.

820 [14] Carayannis EG, Campbell DFJ. *Mode 3 Knowledge Production in Quadruple Helix*
821 *Innovation Systems: 21st-Century Democracy, Innovation, and Entrepreneurship for*
822 *Development: Springer New York; 2011.*

823 [15] Kolehmainen J, Irvine J, Stewart L, Karacsonyi Z, Szabó T, Alarinta J, et al.
824 *Quadruple Helix, Innovation and the Knowledge-Based Development: Lessons from*
825 *Remote, Rural and Less-Favoured Regions. Journal of the Knowledge Economy.*
826 2016;7:23-42.

827 [16] Turnheim B, Berkhout F, Geels F, Hof A, McMeekin A, Nykvist B, et al.
828 *Evaluating sustainability transitions pathways: Bridging analytical approaches to*
829 *address governance challenges. Global Environmental Change*. 2015;35:239-53.

830 [17] Pfenninger S, DeCarolis J, Hirth L, Quoilin S, Staffell I. The importance of open
831 data and software: Is energy research lagging behind? *Energy Policy*. 2017;101:211-5.

832 [18] DeCarolis J, Daly H, Dodds P, Keppo I, Li F, McDowall W, et al. Formalizing best
833 practice for energy system optimization modelling. *Applied Energy*. 2017;194:184-98.

834 [19] Pauwels P, Zhang S, Lee Y-C. Semantic web technologies in AEC industry: A
835 literature overview. *Automation in Construction*. 2017;73:145-65.

836 [20] Tristan G, Kirti R, Malcolm C, Mark J, Mark P. Using BIM capabilities to improve
837 existing building energy modelling practices. *Engineering, Construction and*
838 *Architectural Management*. 2017;24:190-208.

839 [21] Adhikari RS, Aste N, Pero CD, Manfren M. Net Zero Energy Buildings: Expense
840 or Investment? *Energy Procedia*. 2012;14:1331-6.

841 [22] D'Agostino D, Zangheri P, Cuniberti B, Paci D, Bertoldi P. Synthesis Report on the
842 National Plans for Nearly Zero Energy Buildings (NZEBS). JRC EU Commission;
843 2016.

844 [23] Lund H, Marszal A, Heiselberg P. Zero energy buildings and mismatch
845 compensation factors. *Energy and Buildings*. 2011;43:1646-54.

846 [24] Stötzer M, Hauer I, Richter M, Styczynski ZA. Potential of demand side
847 integration to maximize use of renewable energy sources in Germany. *Applied Energy*.
848 2015;146:344-52.

849 [25] Frontini F, Manfren M, Tagliabue LC. A Case Study of Solar Technologies
850 Adoption: Criteria for BIPV Integration in Sensitive Built Environment. *Energy*
851 *Procedia*. 2012;30:1006-15.

852 [26] Zerrahn A, Schill W-P. Long-run power storage requirements for high shares of
853 renewables: review and a new model. *Renewable and Sustainable Energy Reviews*.
854 2017;79:1518-34.

855 [27] Telaretti E, Graditi G, Ippolito MG, Zizzo G. Economic feasibility of stationary
856 electrochemical storages for electric bill management applications: The Italian scenario.
857 *Energy Policy*. 2016;94:126-37.

858 [28] Tarroja B, Chiang F, AghaKouchak A, Samuelsen S, Raghavan SV, Wei M, et al.
859 Translating climate change and heating system electrification impacts on building
860 energy use to future greenhouse gas emissions and electric grid capacity requirements in
861 California. *Applied Energy*. 2018;225:522-34.

862 [29] Sowa T, Kregel S, Koopmann S, Nowak J. Multi-criteria Operation Strategies of
863 Power-to-Heat-Systems in Virtual Power Plants with a High Penetration of Renewable
864 Energies. *Energy Procedia*. 2014;46:237-45.

- 865 [30] Böttger D, Götz M, Lehr N, Kondziella H, Bruckner T. Potential of the Power-to-
866 Heat Technology in District Heating Grids in Germany. *Energy Procedia*. 2014;46:246-
867 53.
- 868 [31] Ehrlich LG, Klamka J, Wolf A. The potential of decentralized power-to-heat as a
869 flexibility option for the German electricity system: A microeconomic perspective.
870 *Energy Policy*. 2015;87:417-28.
- 871 [32] Götz M, Lefebvre J, Mörs F, McDaniel Koch A, Graf F, Bajohr S, et al. Renewable
872 Power-to-Gas: A technological and economic review. *Renewable Energy*.
873 2016;85:1371-90.
- 874 [33] Nastasi B, Lo Basso G. Hydrogen to link heat and electricity in the transition
875 towards future Smart Energy Systems. *Energy*. 2016;110:5-22.
- 876 [34] Parra D, Zhang X, Bauer C, Patel MK. An integrated techno-economic and life
877 cycle environmental assessment of power-to-gas systems. *Applied Energy*.
878 2017;193:440-54.
- 879 [35] Mancarella P. MES (multi-energy systems): An overview of concepts and
880 evaluation models. *Energy*. 2014;65:1-17.
- 881 [36] Orehounig K, Evins R, Dorer V. Integration of decentralized energy systems in
882 neighbourhoods using the energy hub approach. *Applied Energy*. 2015;154:277-89.
- 883 [37] Mohammadi M, Noorollahi Y, Mohammadi-ivatloo B, Hosseinzadeh M, Yousefi
884 H, Khorasani ST. Optimal management of energy hubs and smart energy hubs – A
885 review. *Renewable and Sustainable Energy Reviews*. 2018;89:33-50.
- 886 [38] Reynolds J, Ahmad MW, Rezgui Y. Holistic Modelling Techniques for the
887 Operational Optimisation of Multi-Vector Energy Systems. *Energy and Buildings*.
- 888 [39] Morvaj B, Evins R, Carmeliet J. Optimization framework for distributed energy
889 systems with integrated electrical grid constraints. *Applied Energy*. 2016;171:296-313.
- 890 [40] Sani Hassan A, Cipcigan L, Jenkins N. Impact of optimised distributed energy
891 resources on local grid constraints. *Energy*. 2018;142:878-95.
- 892 [41] Steen D, Stadler M, Cardoso G, Groissböck M, DeForest N, Marnay C. Modeling
893 of thermal storage systems in MILP distributed energy resource models. *Applied*
894 *Energy*. 2015;137:782-92.
- 895 [42] Lyden A, Pepper R, Tuohy PG. A modelling tool selection process for planning of
896 community scale energy systems including storage and demand side management.
897 *Sustainable Cities and Society*. 2018;39:674-88.
- 898 [43] Limleamthong P, Guillén-Gosálbez G. Rigorous analysis of Pareto fronts in
899 sustainability studies based on bilevel optimization: Application to the redesign of the
900 UK electricity mix. *Journal of Cleaner Production*. 2017;164:1602-13.
- 901 [44] Díaz P, Adler C, Patt A. Do stakeholders' perspectives on renewable energy
902 infrastructure pose a risk to energy policy implementation? A case of a hydropower
903 plant in Switzerland. *Energy Policy*. 2017;108:21-8.
- 904 [45] Hemmati R. Optimal design and operation of energy storage systems and
905 generators in the network installed with wind turbines considering practical
906 characteristics of storage units as design variable. *Journal of Cleaner Production*.
907 2018;185:680-93.
- 908 [46] Abushakra B, Reddy A, Singh V. ASHRAE Research Project Report 1404-RP,
909 Measurement, Modeling, Analysis and Reporting Protocols for Short-term M&V of
910 Whole Building Energy Performance, Arizona State University, USA. 2012.
- 911 [47] Paulus MT, Claridge DE, Culp C. Algorithm for automating the selection of a
912 temperature dependent change point model. *Energy and Buildings*. 2015;87:95-104.
- 913 [48] Imam S, Coley DA, Walker I. The building performance gap: Are modellers
914 literate? *Building Services Engineering Research and Technology*. 2017;38:351-75.

915 [49] Allard I, Olofsson T, Nair G. Energy evaluation of residential buildings:
916 Performance gap analysis incorporating uncertainties in the evaluation methods.
917 Building Simulation. 2018;11:725-37.

918 [50] Pomponi F, Moncaster A. Scrutinising embodied carbon in buildings: The next
919 performance gap made manifest. Renewable and Sustainable Energy Reviews.
920 2018;81:2431-42.

921 [51] Moraes L, Bussar C, Stoecker P, Jacqué K, Chang M, Sauer DU. Comparison of
922 long-term wind and photovoltaic power capacity factor datasets with open-license.
923 Applied Energy. 2018;225:209-20.

924 [52] Geels FW. Processes and patterns in transitions and system innovations: refining
925 the co-evolutionary multi-level perspective. Technological forecasting and social
926 change. 2005;72:681-96.

927 [53] Markard J, Hoffmann VH. Analysis of complementarities: Framework and
928 examples from the energy transition. Technological Forecasting and Social Change.
929 2016;111:63-75.

930 [54] Li FGN, Pye S. Uncertainty, politics, and technology: Expert perceptions on
931 energy transitions in the United Kingdom. Energy Research & Social Science.
932 2018;37:122-32.

933 [55] IEA. Capturing the Multiple Benefits of Energy Efficiency. International Energy
934 Agency; 2014.

935 [56] Panula-Ontto J, Luukkanen J, Kaivo-oja J, O'Mahony T, Vehmas J, Valkealahti S,
936 et al. Cross-impact analysis of Finnish electricity system with increased renewables:
937 Long-run energy policy challenges in balancing supply and consumption. Energy
938 Policy. 2018;118:504-13.

939 [57] Gross C. Community perspectives of wind energy in Australia: The application of
940 a justice and community fairness framework to increase social acceptance. Energy
941 Policy. 2007;35:2727-36.

942 [58] Markard J, Truffer B. Technological innovation systems and the multi-level
943 perspective: Towards an integrated framework. Research Policy. 2008;37:596-615.

944 [59] Cloke J, Mohr A, Brown E. Imagining renewable energy: Towards a Social Energy
945 Systems approach to community renewable energy projects in the Global South. Energy
946 Research & Social Science. 2017;31:263-72.

947 [60] Foxon TJ, Hammond GP, Pearson PJ. Developing transition pathways for a low
948 carbon electricity system in the UK. Technological Forecasting and Social Change.
949 2010;77:1203-13.

950 [61] Jebaraj S, Iniyar S. A review of energy models. Renewable and Sustainable
951 Energy Reviews. 2006;10:281-311.

952 [62] Pohekar S, Ramachandran M. Application of multi-criteria decision making to
953 sustainable energy planning—a review. Renewable and sustainable energy reviews.
954 2004;8:365-81.

955 [63] Corgnati SP, Fabrizio E, Filippi M, Monetti V. Reference buildings for cost
956 optimal analysis: Method of definition and application. Applied energy. 2013;102:983-
957 93.

958 [64] Evins R. A review of computational optimisation methods applied to sustainable
959 building design. Renewable and Sustainable Energy Reviews. 2013;22:230-45.

960 [65] Marquant JF, Evins R, Bollinger LA, Carmeliet J. A holarchic approach for multi-
961 scale distributed energy system optimisation. Applied Energy. 2017;208:935-53.

962 [66] Talele S, Traylor C, Arpan L, Curley C, Chen C-F, Day J, et al. Energy modeling
963 and data structure framework for Sustainable Human-Building Ecosystems (SHBE) —
964 a review. Frontiers in Energy. 2018.

965 [67] Abdelalim A, O'Brien W, Shi Z. Data visualization and analysis of energy flow on
966 a multi-zone building scale. *Automation in Construction*. 2017;84:258-73.

967 [68] Jusselme T, Tuor R, Lalanne D, Rey E, Andersen M. Visualization techniques for
968 heterogeneous and multidimensional simulated building performance data sets.
969 *Proceedings of the International Conference for Sustainable Design of the Built*
970 *Environment* 2017. p. 971-82.

971 [69] Yoshino H, Hong T, Nord N. IEA EBC annex 53: Total energy use in buildings—
972 Analysis and evaluation methods. *Energy and Buildings*. 2017;152:124-36.

973 [70] Kylili A, Fokaides PA, Lopez Jimenez PA. Key Performance Indicators (KPIs)
974 approach in buildings renovation for the sustainability of the built environment: A
975 review. *Renewable and Sustainable Energy Reviews*. 2016;56:906-15.

976 [71] Abu Bakar NN, Hassan MY, Abdullah H, Rahman HA, Abdullah MP, Hussin F, et
977 al. Energy efficiency index as an indicator for measuring building energy performance:
978 A review. *Renewable and Sustainable Energy Reviews*. 2015;44:1-11.

979 [72] Nguyen A-T, Reiter S, Rigo P. A review on simulation-based optimization
980 methods applied to building performance analysis. *Applied Energy*. 2014;113:1043-58.

981 [73] Koulamas C, Kalogeras AP, Pacheco-Torres R, Casillas J, Ferrarini L. Suitability
982 analysis of modeling and assessment approaches in energy efficiency in buildings.
983 *Energy and Buildings*. 2018;158:1662-82.

984 [74] Jaffal I, Inard C, Ghiaus C. Fast method to predict building heating demand based
985 on the design of experiments. *Energy and Buildings*. 2009;41:669-77.

986 [75] Kotireddy R, Hoes P-J, Hensen JLM. A methodology for performance robustness
987 assessment of low-energy buildings using scenario analysis. *Applied Energy*.
988 2018;212:428-42.

989 [76] Petri I, Kubicki S, Rezgui Y, Guerriero A, Li H. Optimizing Energy Efficiency in
990 Operating Built Environment Assets through Building Information Modeling: A Case
991 Study. *Energies*. 2017;10:1167.

992 [77] Schlueter A, Geyer P. Linking BIM and Design of Experiments to balance
993 architectural and technical design factors for energy performance. *Automation in*
994 *Construction*. 2018;86:33-43.

995 [78] Shiel P, Tarantino S, Fischer M. Parametric analysis of design stage building
996 energy performance simulation models. *Energy and Buildings*. 2018;172:78-93.

997 [79] de Wilde P. The gap between predicted and measured energy performance of
998 buildings: A framework for investigation. *Automation in Construction*. 2014;41:40-9.

999 [80] Al Gharably M, DeCarolis JF, Ranjithan SR. An enhanced linear regression-based
1000 building energy model (LRBEM+) for early design. *Journal of Building Performance*
1001 *Simulation*. 2016;9:115-33.

1002 [81] Asadi S, Amiri SS, Mottahedi M. On the development of multi-linear regression
1003 analysis to assess energy consumption in the early stages of building design. *Energy and*
1004 *Buildings*. 2014;85:246-55.

1005 [82] Ipbüker C, Valge M, Kalbe K, Muring T, Tkaczyk AH. Case Study of Multiple
1006 Regression as Evaluation Tool for the Study of Relationships between Energy Demand,
1007 Air Tightness, and Associated Factors. *Journal of Energy Engineering*.
1008 2016;143:04016027.

1009 [83] Hygh JS, DeCarolis JF, Hill DB, Ranjithan SR. Multivariate regression as an
1010 energy assessment tool in early building design. *Building and Environment*.
1011 2012;57:165-75.

1012 [84] Catalina T, Virgone J, Blanco E. Development and validation of regression models
1013 to predict monthly heating demand for residential buildings. *Energy and buildings*.
1014 2008;40:1825-32.

1015 [85] Aste N, Adhikari R, Manfren M. Cost optimal analysis of heat pump technology
1016 adoption in residential reference buildings. *Renewable energy*. 2013;60:615-24.

1017 [86] Kavousian A, Rajagopal R. Data-driven benchmarking of building energy
1018 efficiency utilizing statistical frontier models. *Journal of Computing in Civil
1019 Engineering*. 2013;28:79-88.

1020 [87] Tronchin L, Tommasino MC, Fabbri K. On the “cost-optimal levels” of energy
1021 performance requirements and its economic evaluation in Italy. *International Journal of
1022 Sustainable Energy Planning and Management; Vol 3 (2014)*. 2014.

1023 [88] Ligier S, Robillart M, Schalbart P, Peuportier B. Energy performance contracting
1024 methodology based upon simulation and measurement. *Building Simulation 2017* 2017.

1025 [89] Giretti A, Vaccarini M, Casals M, Macarulla M, Fuertes A, Jones R. Reduced-
1026 order modeling for energy performance contracting. *Energy and Buildings*.
1027 2018;167:216-30.

1028 [90] Manfren M, Aste N, Moshksar R. Calibration and uncertainty analysis for
1029 computer models – A meta-model based approach for integrated building energy
1030 simulation. *Applied Energy*. 2013;103:627-41.

1031 [91] Lin G, Claridge DE. A temperature-based approach to detect abnormal building
1032 energy consumption. *Energy and Buildings*. 2015;93:110-8.

1033 [92] Masuda H, Claridge DE. Statistical modeling of the building energy balance
1034 variable for screening of metered energy use in large commercial buildings. *Energy and
1035 Buildings*. 2014;77:292-303.

1036 [93] Paulus MT. Algorithm for explicit solution to the three parameter linear change-
1037 point regression model. *Science and Technology for the Built Environment*.
1038 2017;23:1026-35.

1039 [94] Abushakra B, Paulus MT. An hourly hybrid multi-variate change-point inverse
1040 model using short-term monitored data for annual prediction of building energy
1041 performance, part I: Background (1404-RP). *Science and Technology for the Built
1042 Environment*. 2016;22:976-83.

1043 [95] Abushakra B, Paulus MT. An hourly hybrid multi-variate change-point inverse
1044 model using short-term monitored data for annual prediction of building energy
1045 performance, part II: Methodology (1404-RP). *Science and Technology for the Built
1046 Environment*. 2016;22:984-95.

1047 [96] Abushakra B, Paulus MT. An hourly hybrid multi-variate change-point inverse
1048 model using short-term monitored data for annual prediction of building energy
1049 performance, part III: Results and analysis (1404-RP). *Science and Technology for the
1050 Built Environment*. 2016;22:996-1009.

1051 [97] Tagliabue LC, Manfren M, De Angelis E. Energy efficiency assessment based on
1052 realistic occupancy patterns obtained through stochastic simulation. *Modelling
1053 Behaviour: Springer*; 2015. p. 469-78.

1054 [98] Tagliabue LC, Manfren M, Ciribini ALC, De Angelis E. Probabilistic behavioural
1055 modeling in building performance simulation—The Brescia eLUX lab. *Energy and
1056 Buildings*. 2016;128:119-31.

1057 [99] Cecconi FR, Manfren M, Tagliabue LC, Ciribini ALC, De Angelis E. Probabilistic
1058 behavioral modeling in building performance simulation: A Monte Carlo approach.
1059 *Energy and Buildings*. 2017;148:128-41.

1060 [100] Aste N, Leonforte F, Manfren M, Mazzon M. Thermal inertia and energy
1061 efficiency – Parametric simulation assessment on a calibrated case study. *Applied
1062 Energy*. 2015;145:111-23.

1063 [101] Tronchin L, Manfren M, Tagliabue LC. Optimization of building energy
1064 performance by means of multi-scale analysis – Lessons learned from case studies.
1065 Sustainable Cities and Society. 2016;27:296-306.

1066 [102] Jalori S, T Agami Reddy PhD P. A new clustering method to identify outliers and
1067 diurnal schedules from building energy interval data. ASHRAE Transactions.
1068 2015;121:33.

1069 [103] Jalori S, T Agami Reddy PhD P. A unified inverse modeling framework for
1070 whole-building energy interval data: daily and hourly baseline modeling and short-term
1071 load forecasting. ASHRAE Transactions. 2015;121:156.

1072 [104] Qomi MJA, Noshadravan A, Sobstyl JM, Toole J, Ferreira J, Pellenq RJ-M, et al.
1073 Data analytics for simplifying thermal efficiency planning in cities. Journal of The
1074 Royal Society Interface. 2016;13:20150971.

1075 [105] Meng Q, Mourshed M. Degree-day based non-domestic building energy analytics
1076 and modelling should use building and type specific base temperatures. Energy and
1077 Buildings. 2017;155:260-8.

1078 [106] Kohler M, Blond N, Clappier A. A city scale degree-day method to assess
1079 building space heating energy demands in Strasbourg Eurometropolis (France). Applied
1080 Energy. 2016;184:40-54.

1081 [107] Afshari A, Friedrich LA. Inverse modeling of the urban energy system using
1082 hourly electricity demand and weather measurements, Part 1: Black-box model. Energy
1083 and Buildings. 2017;157:126-38.

1084 [108] Afshari A, Liu N. Inverse modeling of the urban energy system using hourly
1085 electricity demand and weather measurements, Part 2: Gray-box model. Energy and
1086 Buildings. 2017;157:139-56.

1087 [109] Booth A, Choudhary R, Spiegelhalter D. A hierarchical Bayesian framework for
1088 calibrating micro-level models with macro-level data. Journal of Building Performance
1089 Simulation. 2013;6:293-318.

1090 [110] Li Q, Augenbroe G, Brown J. Assessment of linear emulators in lightweight
1091 Bayesian calibration of dynamic building energy models for parameter estimation and
1092 performance prediction. Energy and Buildings. 2016;124:194-202.

1093 [111] Miller C, Schlueter A. Applicability of lean production principles to performance
1094 analysis across the life cycle phases of buildings. Institute of Technology in
1095 Architecture (ITA), ETH Zürich Zürich, Switzerland Conference: CLIMA2013.

1096 [112] Bollinger LA, Davis CB, Evins R, Chappin EJJ, Nikolic I. Multi-model ecologies
1097 for shaping future energy systems: Design patterns and development paths. Renewable
1098 and Sustainable Energy Reviews. 2018;82:3441-51.

1099 [113] Gallagher CV, Leahy K, O'Donovan P, Bruton K, O'Sullivan DT. Development
1100 and application of a machine learning supported methodology for measurement and
1101 verification (M&V) 2.0. Energy and Buildings. 2018;167:8-22.

1102 [114] Aste N, Manfren M, Marenzi G. Building Automation and Control Systems and
1103 performance optimization: A framework for analysis. Renewable and Sustainable
1104 Energy Reviews. 2017;75:313-30.

1105 [115] Serale G, Fiorentini M, Capozzoli A, Bernardini D, Bemporad A. Model
1106 Predictive Control (MPC) for Enhancing Building and HVAC System Energy
1107 Efficiency: Problem Formulation, Applications and Opportunities. Energies.
1108 2018;11:631.

1109 [116] Adhikari RS, Aste N, Manfren M. Multi-commodity network flow models for
1110 dynamic energy management – Smart Grid applications. Energy Procedia.
1111 2012;14:1374-9.

- 1112 [117] Manfren M. Multi-commodity network flow models for dynamic energy
1113 management – Mathematical formulation. *Energy Procedia*. 2012;14:1380-5.
- 1114 [118] Fouquier A, Robert S, Suard F, Stéphan L, Jay A. State of the art in building
1115 modelling and energy performances prediction: A review. *Renewable and Sustainable*
1116 *Energy Reviews*. 2013;23:272-88.
- 1117 [119] Adhikari RS, Aste N, Manfren M. Optimization concepts in district energy design
1118 and management – A case study. *Energy Procedia*. 2012;14:1386-91.
- 1119 [120] Cipriano X, Gamboa G, Danov S, Mor G, Cipriano J. Developing indicators to
1120 improve energy action plans in municipalities: An accounting framework based on the
1121 fund-flow model. *Sustainable Cities and Society*. 2017;32:263-76.
- 1122 [121] Di Somma M, Graditi G, Heydarian-Forushani E, Shafie-khah M, Siano P.
1123 Stochastic optimal scheduling of distributed energy resources with renewables
1124 considering economic and environmental aspects. *Renewable Energy*. 2018;116:272-87.
- 1125 [122] Aste N, Buzzetti M, Caputo P, Manfren M. Local energy efficiency programs: A
1126 monitoring methodology for heating systems. *Sustainable Cities and Society*.
1127 2014;13:69-77.
- 1128 [123] Zhou P, Ang BW, Poh K-L. A survey of data envelopment analysis in energy and
1129 environmental studies. *European Journal of Operational Research*. 2008;189:1-18.
- 1130 [124] Breiner S, Subrahmanian E, Sriram RD. Modeling the Internet of Things: A
1131 Foundational Approach. *Proceedings of the Seventh International Workshop on the*
1132 *Web of Things: ACM*; 2016. p. 38-41.
- 1133 [125] Kavgić M, Mavrogianni A, Mumović D, Summerfield A, Stevanović Z, Djurović-
1134 Petrović M. A review of bottom-up building stock models for energy consumption in
1135 the residential sector. *Building and Environment*. 2010;45:1683-97.
- 1136 [126] Zhao H-x, Magoulès F. A review on the prediction of building energy
1137 consumption. *Renewable and Sustainable Energy Reviews*. 2012;16:3586-92.
- 1138 [127] Fumo N. A review on the basics of building energy estimation. *Renewable and*
1139 *Sustainable Energy Reviews*. 2014;31:53-60.
- 1140 [128] Oh S, Haberl JS. Origins of analysis methods used to design high-performance
1141 commercial buildings: Whole-building energy simulation. *Science and Technology for*
1142 *the Built Environment*. 2016;22:118-37.
- 1143 [129] Oh S, Haberl JS. Origins of analysis methods used to design high-performance
1144 commercial buildings: Solar energy analysis. *Science and Technology for the Built*
1145 *Environment*. 2016;22:87-106.
- 1146 [130] Oh S, Haberl JS. Origins of analysis methods used to design high-performance
1147 commercial buildings: Daylighting simulation. *Science and Technology for the Built*
1148 *Environment*. 2016;22:107-17.
- 1149 [131] Fabbri K, Tarabusi V. Top-down and bottom-up methodologies for energy
1150 building performance evaluation at meso-scale level—A literature review. *J Civ Eng*
1151 *Archit Res*. 2014;1:283-99.
- 1152 [132] ASHRAE 140-2017 - Standard Method of Test for the Evaluation of Building
1153 Energy Analysis Computer Programs (ANSI Approved). 2017.
- 1154 [133] ASHRAE Guideline 14-2014: Measurement of Energy, Demand, and Water
1155 Savings; American Society of Heating, Refrigerating and Air-Conditioning Engineers:
1156 Atlanta, GA, USA, 2014.
- 1157 [134] Wetter M. A view on future building system modeling and simulation. Ernest
1158 Orlando Lawrence Berkeley National Laboratory, Berkeley, CA (US); 2011.
- 1159 [135] Clarke JA, Hensen JLM. Integrated building performance simulation: Progress,
1160 prospects and requirements. *Building and Environment*. 2015;91:294-306.

1161 [136] Clarke J. A vision for building performance simulation: a position paper prepared
1162 on behalf of the IBPSA Board. *Journal of Building Performance Simulation*. 2015;8:39-
1163 43.

1164 [137] Hong T, Langevin J, Sun K. Building simulation: Ten challenges. *Building*
1165 *Simulation*. 2018.

1166 [138] Killian M, Kozek M. Ten questions concerning model predictive control for
1167 energy efficient buildings. *Building and Environment*. 2016;105:403-12.

1168 [139] Hong T, Yan D, D'Oca S, Chen C-f. Ten questions concerning occupant behavior
1169 in buildings: The big picture. *Building and Environment*. 2017;114:518-30.

1170 [140] Wang N, Phelan PE, Gonzalez J, Harris C, Henze GP, Hutchinson R, et al. Ten
1171 questions concerning future buildings beyond zero energy and carbon neutrality.
1172 *Building and Environment*. 2017;119:169-82.

1173 [141] Voss K, Sartori I, Napolitano A, Geier S, Gonçalves H, Hall M, et al. Load
1174 matching and grid interaction of net zero energy buildings. *EUROSUN 2010*
1175 *International Conference on Solar Heating, Cooling and Buildings2010*.

1176 [142] Yang L, Yan H, Lam JC. Thermal comfort and building energy consumption
1177 implications – A review. *Applied Energy*. 2014;115:164-73.

1178 [143] Taleghani M, Tenpierik M, Kurvers S, van den Dobbelsteen A. A review into
1179 thermal comfort in buildings. *Renewable and Sustainable Energy Reviews*.
1180 2013;26:201-15.

1181 [144] van Schijndel AWM. Combining three main modeling methodologies for heat,
1182 air, moisture and pollution modeling. *Energy Procedia*. 2017;132:195-200.

1183 [145] Naveros I, Ghiaus C, Ordoñez J, Ruiz D. Thermal networks considering graph
1184 theory and thermodynamics. 2016.

1185 [146] Lehmann B, Gyalistras D, Gwerder M, Wirth K, Carl S. Intermediate complexity
1186 model for Model Predictive Control of Integrated Room Automation. *Energy and*
1187 *Buildings*. 2013;58:250-62.

1188 [147] Buonomano A, Montanaro U, Palombo A, Santini S. Dynamic building energy
1189 performance analysis: A new adaptive control strategy for stringent thermohygrometric
1190 indoor air requirements. *Applied Energy*. 2016;163:361-86.

1191 [148] Rawlings J, Coker P, Doak J, Burfoot B. The Need for New Building Energy
1192 Models to Support SME Carbon Reduction. 4th TSBE EngD Conference2013.

1193 [149] Rawlings J, Coker P, Doak J, Burfoot B. A Clustering Approach to Support SME
1194 Carbon Reduction, Building Simulation and Optimization BSO142014.

1195 [150] Liu F, Jiang H, Lee YM, Snowdon J, Bobker M. Statistical modeling for anomaly
1196 detection, forecasting and root cause analysis of energy consumption for a portfolio of
1197 buildings. *Proceedings of IBPSA2011*. 2011.

1198 [151] Aste N, Adhikari RS, Manfren M. Cost optimal analysis of heat pump technology
1199 adoption in residential reference buildings. *Renewable Energy*. 2013;60:615-24.

1200 [152] Fleiter T, Worrell E, Eichhammer W. Barriers to energy efficiency in industrial
1201 bottom-up energy demand models—A review. *Renewable and Sustainable Energy*
1202 *Reviews*. 2011;15:3099-111.

1203 [153] Menezes AC, Cripps A, Bouchlaghem D, Buswell R. Predicted vs. actual energy
1204 performance of non-domestic buildings: Using post-occupancy evaluation data to
1205 reduce the performance gap. *Applied Energy*. 2012;97:355-64.

1206 [154] Molderink A, Bakker V, Bosman MGC, Hurink JL, Smit GJM. Management and
1207 Control of Domestic Smart Grid Technology. *IEEE Transactions on Smart Grid*.
1208 2010;1:109-19.

1209 [155] Karsten Voss, Eike Musall, Lichtmeß M. From Low-Energy to Net Zero-Energy
1210 Buildings: Status and Perspectives. *Journal of Green Building*. 2011;6:46-57.

- 1211 [156] Jabir H, Teh J, Ishak D, Abunima H. Impacts of Demand-Side Management on
1212 Electrical Power Systems: A Review. *Energies*. 2018;11:1050.
- 1213 [157] Palensky P, Dietrich D. Demand Side Management: Demand Response,
1214 Intelligent Energy Systems, and Smart Loads. *IEEE Transactions on Industrial*
1215 *Informatics*. 2011;7:381-8.
- 1216 [158] Barnhart CJ, Dale M, Brandt AR, Benson SM. The energetic implications of
1217 curtailing versus storing solar- and wind-generated electricity. *Energy & Environmental*
1218 *Science*. 2013;6:2804-10.
- 1219 [159] Paterakis NG, Erdinç O, Catalão JPS. An overview of Demand Response: Key-
1220 elements and international experience. *Renewable and Sustainable Energy Reviews*.
1221 2017;69:871-91.
- 1222 [160] Soares N, Costa JJ, Gaspar AR, Santos P. Review of passive PCM latent heat
1223 thermal energy storage systems towards buildings' energy efficiency. *Energy and*
1224 *Buildings*. 2013;59:82-103.
- 1225 [161] Shoening S. Characteristics and technologies for long- vs. short-term energy
1226 storage: a study by the DOE energy storage systems program. Technical report.
1227 SAND2001-0765. Sandia National Laboratories. United States Department of Energy;
1228 2011.
- 1229 [162] Andrepont S. Energy storage – thermal energy storage coupled with turbine inlet
1230 cooling (http://www.turbineinletcooling.org/resources/papers/Andrepont_2012EP.pdf).
1231 14th annual electric power conf & exhibition.
- 1232 [163] Akinyele DO, Rayudu RK. Review of energy storage technologies for sustainable
1233 power networks. *Sustainable Energy Technologies and Assessments*. 2014;8:74-91.
- 1234 [164] Luo X, Wang J, Dooner M, Clarke J. Overview of current development in
1235 electrical energy storage technologies and the application potential in power system
1236 operation. *Applied Energy*. 2015;137:511-36.
- 1237 [165] Chen H, Cong TN, Yang W, Tan C, Li Y, Ding Y. Progress in electrical energy
1238 storage system: A critical review. *Progress in Natural Science*. 2009;19:291-312.
- 1239 [166] Díaz-González F, Sumper A, Gomis-Bellmunt O, Bianchi FD. Energy
1240 management of flywheel-based energy storage device for wind power smoothing.
1241 *Applied Energy*. 2013;110:207-19.
- 1242 [167] Razmara M, Bharati GR, Hanover D, Shahbakhti M, Paudyal S, Robinett Iii RD.
1243 Building-to-grid predictive power flow control for demand response and demand
1244 flexibility programs. *Applied Energy*. 2017;203:128-41.
- 1245 [168] Beil I, Hiskens IA, Backhaus S. Round-trip efficiency of fast demand response in
1246 a large commercial air conditioner. *Energy and Buildings*. 2015;97:47-55.
- 1247 [169] Schaber C, Mazza P, Hammerschlag R. Utility-Scale Storage of Renewable
1248 Energy. *The Electricity Journal*. 2004;17:21-9.
- 1249 [170] Böttger D, Götz M, Theofilidi M, Bruckner T. Control power provision with
1250 power-to-heat plants in systems with high shares of renewable energy sources – An
1251 illustrative analysis for Germany based on the use of electric boilers in district heating
1252 grids. *Energy*. 2015;82:157-67.
- 1253 [171] Dincer I. On thermal energy storage systems and applications in buildings.
1254 *Energy and Buildings*. 2002;34:377-88.
- 1255 [172] Baeten B, Rogiers F, Helsen L. Reduction of heat pump induced peak electricity
1256 use and required generation capacity through thermal energy storage and demand
1257 response. *Applied Energy*. 2017;195:184-95.
- 1258 [173] Beuzekom Iv, Gibescu M, Slootweg JG. A review of multi-energy system
1259 planning and optimization tools for sustainable urban development. 2015 IEEE
1260 Eindhoven PowerTech2015. p. 1-7.

1261 [174] Noussan M, Roberto R, Nastasi B. Performance Indicators of Electricity
1262 Generation at Country Level—The Case of Italy. *Energies*. 2018;11:650.

1263 [175] Noussan M, Jarre M, Roberto R, Russolillo D. Combined vs separate heat and
1264 power production – Primary energy comparison in high renewable share contexts.
1265 *Applied Energy*. 2018;213:1-10.

1266 [176] Amrouche SO, Rekioua D, Rekioua T, Bacha S. Overview of energy storage in
1267 renewable energy systems. *International Journal of Hydrogen Energy*. 2016;41:20914-
1268 27.

1269 [177] Guney MS, Tepe Y. Classification and assessment of energy storage systems.
1270 *Renewable and Sustainable Energy Reviews*. 2017;75:1187-97.

1271 [178] Aneke M, Wang M. Energy storage technologies and real life applications—A state
1272 of the art review. *Applied Energy*. 2016;179:350-77.

1273 [179] Gallo A, Simões-Moreira J, Costa H, Santos M, dos Santos EM. Energy storage in
1274 the energy transition context: A technology review. *Renewable and sustainable energy
1275 reviews*. 2016;65:800-22.

1276 [180] Saboori H, Hemmati R, Ghiasi SMS, Dehghan S. Energy storage planning in
1277 electric power distribution networks—A state-of-the-art review. *Renewable and
1278 Sustainable Energy Reviews*. 2017;79:1108-21.

1279 [181] Belderbos A, Virag A, D’haeseleer W, Delarue E. Considerations on the need for
1280 electricity storage requirements: Power versus energy. *Energy Conversion and
1281 Management*. 2017;143:137-49.

1282 [182] McKenna R, Merkel E, Fichtner W. Energy autonomy in residential buildings: A
1283 techno-economic model-based analysis of the scale effects. *Applied energy*.
1284 2017;189:800-15.

1285 [183] van der Stelt S, AlSkaif T, van Sark W. Techno-economic analysis of household
1286 and community energy storage for residential prosumers with smart appliances. *Applied
1287 Energy*. 2018;209:266-76.

1288 [184] Forrester SP, Zaman A, Mathieu JL, Johnson JX. Policy and market barriers to
1289 energy storage providing multiple services. *The Electricity Journal*. 2017;30:50-6.

1290 [185] Castagneto Gisse G, Dodds PE, Radcliffe J. Market and regulatory barriers to
1291 electrical energy storage innovation. *Renewable and Sustainable Energy Reviews*.
1292 2018;82:781-90.

1293 [186] Haas J, Cebulla F, Cao K, Nowak W, Palma-Behnke R, Rahmann C, et al.
1294 Challenges and trends of energy storage expansion planning for flexibility provision in
1295 low-carbon power systems—a review. *Renewable and Sustainable Energy Reviews*.
1296 2017;80:603-19.

1297 [187] Noussan M, Jarre M. Multicarrier energy systems: Optimization model based on
1298 real data and application to a case study. *International Journal of Energy Research*.
1299 2018.

1300 [188] Finck C, Li R, Kramer R, Zeiler W. Quantifying demand flexibility of power-to-
1301 heat and thermal energy storage in the control of building heating systems. *Applied
1302 Energy*. 2018;209:409-25.

1303 [189] Parra D, Swierczynski M, Stroe DI, Norman SA, Abdon A, Worlitschek J, et al.
1304 An interdisciplinary review of energy storage for communities: Challenges and
1305 perspectives. *Renewable and Sustainable Energy Reviews*. 2017;79:730-49.

1306 [190] Razmara M, Bharati G, Hanover D, Shahbakhti M, Paudyal S, Robinett III R.
1307 Building-to-grid predictive power flow control for demand response and demand
1308 flexibility programs. *Applied Energy*. 2017;203:128-41.

1309 [191] Ma Z, Billanes JD, Jørgensen BN. Aggregation Potentials for Buildings—
1310 Business Models of Demand Response and Virtual Power Plants. *Energies*.
1311 2017;10:1646.

1312 [192] Brange L, Englund J, Lauenburg P. Prosumers in district heating networks—A
1313 Swedish case study. *Applied energy*. 2016;164:492-500.

1314 [193] Ghiassi N, Tahmasebi F, Mahdavi A. Harnessing buildings' operational diversity
1315 in a computational framework for high-resolution urban energy modeling. *Building*
1316 *Simulation*: Springer; 2017. p. 1005-21.

1317 [194] Romanchenko D, Kensby J, Odenberger M, Johnsson F. Thermal energy storage
1318 in district heating: Centralised storage vs. storage in thermal inertia of buildings. *Energy*
1319 *Conversion and Management*. 2018;162:26-38.

1320 [195] Berardi U, Tronchin L, Manfren M, Nastasi B. On the Effects of Variation of
1321 Thermal Conductivity in Buildings in the Italian Construction Sector. *Energies*.
1322 2018;11:872.

1323 [196] Carr J, Brissette A, Ragaini E, Omati L. Managing Smart Grids Using Price
1324 Responsive Smart Buildings. *Energy Procedia*. 2017;134:21-8.

1325 [197] Chatzivasileiadi A, Ampatzi E, Knight IP. The Implications of Demand Response
1326 Measures and Electrification of Transport on UK Household Energy Demand and
1327 Consumption. *Energy Procedia*. 2017;134:89-98.

1328 [198] Rahbari O, Vafaeipour M, Omar N, Rosen MA, Hegazy O, Timmermans J-M, et
1329 al. An optimal versatile control approach for plug-in electric vehicles to integrate
1330 renewable energy sources and smart grids. *Energy*. 2017;134:1053-67.

1331 [199] Arciniegas LM, Hittinger E. Tradeoffs between revenue and emissions in energy
1332 storage operation. *Energy*. 2018;143:1-11.

1333 [200] Cebulla F, Haas J, Eichman J, Nowak W, Mancarella P. How much electrical
1334 energy storage do we need? A synthesis for the US, Europe, and Germany. *Journal of*
1335 *Cleaner Production*. 2018;181:449-59.

1336 [201] Ueckerdt F, Hirth L, Luderer G, Edenhofer O. System LCOE: What are the costs
1337 of variable renewables? *Energy*. 2013;63:61-75.

1338 [202] Jülch V. Comparison of electricity storage options using levelized cost of storage
1339 (LCOS) method. *Applied Energy*. 2016;183:1594-606.

1340 [203] Belderbos A, Delarue E, Kessels K, D'Haeseleer W. Levelized cost of storage —
1341 Introducing novel metrics. *Energy Economics*. 2017;67:287-99.

1342 [204] Scapino L, Zondag HA, Van Bael J, Diriken J, Rindt CCM. Energy density and
1343 storage capacity cost comparison of conceptual solid and liquid sorption seasonal heat
1344 storage systems for low-temperature space heating. *Renewable and Sustainable Energy*
1345 *Reviews*. 2017;76:1314-31.

1346 [205] Rathgeber C, Lävemann E, Hauer A. Economic top-down evaluation of the costs
1347 of energy storages—A simple economic truth in two equations. *Journal of Energy*
1348 *Storage*. 2015;2:43-6.

1349 [206] Noussan M. Performance indicators of District Heating Systems in Italy – Insights
1350 from a data analysis. *Applied Thermal Engineering*. 2018;134:194-202.

1351 [207] Jülch V, Telsnig T, Schulz M, Hartmann N, Thomsen J, Eltrop L, et al. A Holistic
1352 Comparative Analysis of Different Storage Systems using Levelized Cost of Storage
1353 and Life Cycle Indicators. *Energy Procedia*. 2015;73:18-28.

1354 [208] Goebel C, Cheng V, Jacobsen H-A. Profitability of Residential Battery Energy
1355 Storage Combined with Solar Photovoltaics. *Energies*. 2017;10:976.

1356 [209] Jarnut M, Wermiński S, Waśkiewicz B. Comparative analysis of selected energy
1357 storage technologies for prosumer-owned microgrids. *Renewable and Sustainable*
1358 *Energy Reviews*. 2017;74:925-37.

1359 [210] Lizana J, Chacartegui R, Barrios-Padura A, Valverde JM. Advances in thermal
1360 energy storage materials and their applications towards zero energy buildings: A critical
1361 review. Applied Energy. 2017;203:219-39.

1362 [211] IEA-ETSAP and IRENA technology brief: Thermal energy storage-technology
1363 brief. (Available at <http://stage-ste.eu/documents/TES%201%20IRENA-ETSAP%20Tech%20Brief%20E17%20Thermal%20Energy%20Storage.pdf>) Accessed
1364 on 22 April 2018.

1365 [212] Cebulla F, Naegler T, Pohl M. Electrical energy storage in highly renewable
1366 European energy systems: Capacity requirements, spatial distribution, and storage
1367 dispatch. Journal of Energy Storage. 2017;14:211-23.

1368 [213] IRENA Report: Battery storage for renewables: market status and technology
1369 outlook 2015. (Available at
1370 https://www.irena.org/documentdownloads/publications/irena_battery_storage_report_2015.pdf) Accessed on 13 June 2018.

1371 [214] Ardani K, O'Shaughnessy E, Fu R, McClurg C, Huneycutt J, Margolis R. NREL
1372 Report: Installed Cost Benchmarks and Deployment Barriers for Residential Solar
1373 Photovoltaics with Energy Storage: Q1 2016. (Available at
1374 <https://www.nrel.gov/docs/fy17osti/67474.pdf>) Accessed on 13 June 2018.
1375
1376
1377