

Alma Mater Studiorum Università di Bologna  
Archivio istituzionale della ricerca

Improving water management in European catfish recirculating aquaculture systems through catfish-lettuce aquaponics

This is the final peer-reviewed author's accepted manuscript (postprint) of the following publication:

*Published Version:*

Calone, R., Pennisi, G., Morgenstern, R., Sanyé-Mengual, E., Lorleberg, W., Dapprich, P., et al. (2019). Improving water management in European catfish recirculating aquaculture systems through catfish-lettuce aquaponics. *SCIENCE OF THE TOTAL ENVIRONMENT*, 687, 759-767 [10.1016/j.scitotenv.2019.06.167].

*Availability:*

This version is available at: <https://hdl.handle.net/11585/702738> since: 2019-10-18

*Published:*

DOI: <http://doi.org/10.1016/j.scitotenv.2019.06.167>

*Terms of use:*

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).  
When citing, please refer to the published version.

(Article begins on next page)

This is the final peer-reviewed accepted manuscript of:

R. Calone, G. Pennisi, R. Morgenstern, E. Sanyé-Mengual, W. Lorleberg, P. Dapprich,  
P. Winkler, F. Orsini, G. Gianquinto

Improving water management in European catfish recirculating aquaculture systems  
through catfish-lettuce aquaponics

Science of the Total Environment 687 (2019) 759–767

The final published version is available online at:

<https://doi.org/10.1016/j.scitotenv.2019.06.167>

© 2019 Elsevier. This manuscript version is made available under the Creative Commons Attribution-NonCommercial-NoDerivs (CC BY-NC-ND) 4.0 International License (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)

# 1 Improving water management in European catfish recirculating aquaculture systems through catfish- 2 lettuce aquaponics

3

4 R. Calone<sup>1</sup>, G. Pennisi<sup>1,2</sup>, R. Morgenstern<sup>3</sup>, E. Sanyé-Mengual<sup>1</sup>, W. Lorleberg<sup>3</sup>, P. Dapprich<sup>3</sup>, P. Winkler<sup>3</sup>, F.  
5 Orsini<sup>\*1</sup>, G. Gianquinto<sup>1</sup>

6

7 <sup>1</sup>Research Centre in Urban Environment for Agriculture and Biodiversity (ResCUE-AB), Department of  
8 Agricultural and Food Sciences (DISTAL), Alma Mater Studiorum University of Bologna, Viale Fanin, 44,  
9 40127, Bologna, Italy.

10 <sup>2</sup>DISAFA, Department of Agricultural, Forest and Food Sciences. Università di Torino, Via Leonardo da  
11 Vinci, 44, Largo Braccini 2, 10095, Grugliasco (TO), Italy.

12 <sup>3</sup>Department of Agriculture, South Westphalia University of Applied Sciences, Lübecker Ring 2, 59494, Soest,  
13 Germany.

## 14 Abstract

15 In the context of climate change and population growth, aquaculture plays an important role for food security,  
16 employment and economic development. Intensive recirculating aquaculture systems (RAS) allow to treat  
17 and recycle fish effluents to reduce waste concentration in outflow water thereby reducing environmental  
18 contamination. RAS sustainability may be further improved using aquaponics, a circular productive system  
19 in which RAS wastewater is recovered for crop cultivation and recycled back to the fish tanks. In this study,  
20 water metabolism of a catfish RAS was assessed and the opportunity to produce lettuce with the RAS  
21 effluent was tested. Crop growth and water consumption in aquaponics were compared to those experienced  
22 in hydroponics at three nutrient solution concentration (EC of 1.6, 2.0 and 3.0 dS·m<sup>-1</sup>), also considering water-  
23 (WUE) and nitrogen- use efficiency (NUE). A scenario for converting the RAS in a catfish-lettuce aquaponic  
24 system was, then, proposed.

25 The RAS water balance included an input of 555 L·day<sup>-1</sup>, out of which 32 L·day<sup>-1</sup> were lost by evaporation  
26 from the tubs whereas 460 L·day<sup>-1</sup> were discarded. The lettuce yield, NUE and WUE in aquaponics were  
27 respectively 20.3%, 22.3% and 20.6% lower than those obtained in hydroponics. Best performances in

28 hydroponics were achieved with EC of  $2.0 \text{ dS m}^{-1}$ . No difference in term of water consumption arose between  
29 the treatments, with average water use of  $46 \text{ mL} \cdot \text{plant}^{-1} \cdot \text{day}^{-1}$ .  
30 Considering the current RAS productivity of  $329 \text{ kg year}^{-1}$ , a  $10 \text{ m}^2$  raft system hosting 160 lettuces would  
31 satisfy the nitrogen filtration demand. Once closed the water loop between the two productive sub-units, the  
32 current water input of  $532 \text{ L} \cdot \text{day}^{-1}$  could be reduced to the amount needed to replace the water lost by  
33 evaporation ( $50 \text{ L} \cdot \text{day}^{-1}$ ) and the RAS water output would decrease from 555 to  $103 \text{ L} \cdot \text{day}^{-1}$ .


34

35 **Keywords: Aquaponics, RAS, electrical conductivity, water use efficiency, sustainability**


36

37      **Graphical Abstract**


1. PRELIMINARY ASSESSMENT OF THE WATER METABOLISM OF A EUROPEAN CATFISH RAS

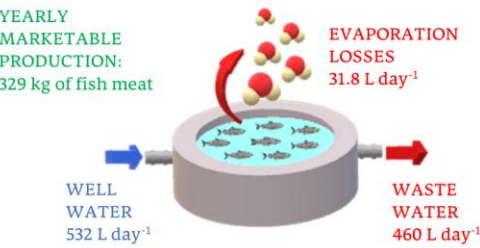

2. LETTUCE PERFORMANCE IN AQUAPONICS vs HYDROPONICS

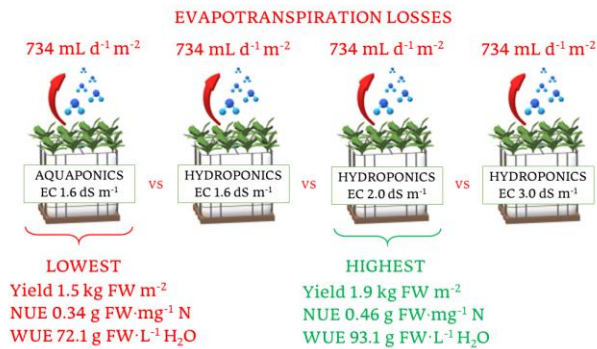

3. SCENARIO FOR CONVERTING THE RAS IN A CATFISH-LETTUCE AQUAPONIC SYSTEM

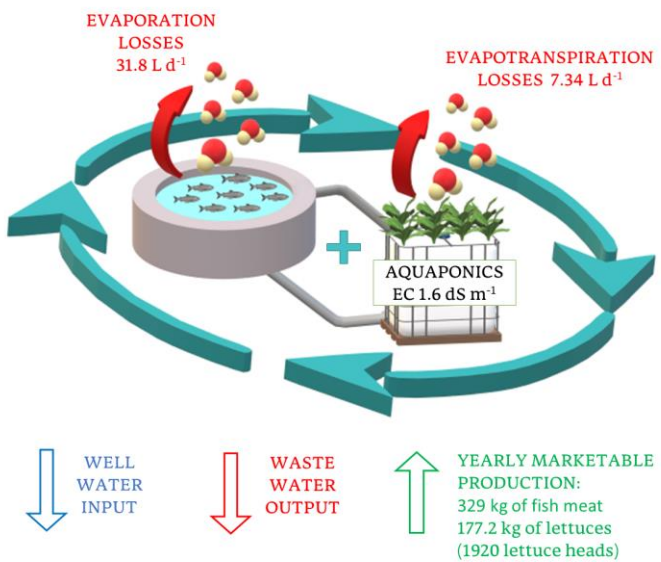

38

39

40      **1. Introduction**

41      World population is expected to increase between 20% and 30% by 2050, growing from 7.7 billion people to  
42      between 9.2 and 10.2 billion. Accordingly, global food demand is foreseen to increase by 60% by 2025  
43      (Alexandros and Bruinsma, 2012). Concurrently, the global water consumption, already risen by 600% in the  
44      last century, will keep growing at a 1% yearly rate Wada et al., (2016) In this framework, the FAO Fisheries  
45      and Aquaculture Department (FAO, 2018) highlighted the important role of fisheries and aquaculture in  
46      boosting food and nutrition security, job employment and income generation for local communities. Today  
47      aquaculture (e.i. the cultivation of aquatic organisms in natural or controlled marine or freshwater  
48      environments) accounts for over 50% of the fish destined for human consumption, providing a primary source  
49      of protein and essential micronutrients worldwide (FAO, 2018). Current aquaculture systems range from  
50      extensive to intensive, depending on the level of inputs, the fish stocking density, and the degree of  
51      management. The adoption of intensive land-based systems located close to the markets, i.e. in the areas with  
52      high population density, is rapidly growing. Intensive fish farming systems can be categorized in “flow-

through” and “RAS” (Recirculating Aquaculture System). The former are open-systems in which the clean water flows once and is discharged thereafter. They are common in regions with high water availability, but their use is becoming always more limited due to the stringent water regulations regarding wastewater discharges into natural water bodies. The effluents from these open systems, containing residuals of uneaten food and high concentrations of nitrogen and phosphorus, can in fact cause oxygen depletion and eutrophication in the receiving water bodies (Martins et al., 2010). In the RAS, instead, only less than 10% of the total water volume needs to be daily discarded (Timmons and Ebeling, 2017). These systems are provided of mechanical and biological filters and additional water treatment components to depurate water from pollutants and allowing diseases control. Through this filtration process, the same volume of water can be continuously recirculated within the system while only a limited amount needs to be replaced with fresh water to avoid excessive nutrient loading.

Despite the introduction of RAS in aquaculture already contributed to downsizing the wastewater emissions into the environment, the disposing of this water is still a constant concern for aquaculture operators, especially now that environmental measures are evolving toward the concept of zero emission circular economy (EU, 2018). In this context, the set-up of closed-loop productive systems with low- or no-emissions, such as the aquaponics (e.g. a soilless system for crop production integrating aquaculture and hydroponics) concept, is raising growing interest (Endut et al., 2016). A key advantage of aquaponics is the symbiotic relationship between the plants and the fishes of the horticultural and aquaculture systems, respectively, which can be connected through the recirculation of the water flow. The fish dejections in the outflow water from the aquaculture system provide nutrients for the plants growth in the horticultural one, whereas plants, in turn, clean and filter the water that can be reused back to the fish tank (Goddek et al., 2015). This mutual exchange depends on the action of two different groups of bacteria, namely *Nitrosomonas spp.* and *Nitrobacter spp.* These bacteria oxidize the ammonia and nitrites excreted by the fishes to nitrates, which are easier to absorb by the plant roots (Rakocy et al., 2006). When an appropriate balance between the fish waste generation and the plants’ nutrient uptake is achieved, the daily water consumption can be reduced to the water required for replacing the losses by evapotranspiration (Timmons and Ebeling, 2017). Accordingly, the discharge of effluents into the environment is reduced. In this sense, aquaponics promotes the minimization of by-product flows from economic activities by employing them as

resources in another activity, thereby contributing to the fulfilment of the goals of circular economy (EU, 2018). Previous researches positively evaluated the waste-to-input aquaponic technology as a sustainable approach to manage RAS wastewater, assessing the plants potential in utilizing nutrients from fishery effluents and their contribution in maintaining a proper level of water quality (Endut et al., 2016; Espinosa Moya et al., 2017). The goal of the present research is, then, to measure the water consumption of a pre-existing catfish RAS and to make a preliminary evaluation of the potential use of its wastewater for lettuce production in hydroponics, pursuant to the aquaponic principles. The specific objectives are to (a) quantify the water metabolism and losses of the existing aquaculture system, (b) compare the lettuce growth (i.e. yield, Water Use Efficiency - WUE - and Nitrogen Use Efficiency - NUE) in aquaponics vs conventional hydroponics, and (c) propose a design scenario to convert the aquaculture system into a catfish-lettuce aquaponic system. A set of experiments were therefore implemented in Soest (Germany) to address these research questions.

93

## 94 **2. Materials and methods**

### 95 **2.1. Case study**

96 Data collection was conducted at the experimental Recirculating Aquaculture System (RAS) of the South  
97 Westphalia University of Applied Sciences (SWUAS) in Soest (Germany) between June 2016 and July 2017.  
98 This plant was created in 2015 and consisted of three fish tanks of 1100 L each, filled up independently with  
99 a water inflow processed in a sedimenter (460 L), a biofilter (nitrification process), and a water heater (800  
100 L). The water outflow from the fish tanks was channeled to the sedimenter for solid removal and, then, re-  
101 directed to the biofilter, thereby closing the water cycle. A certain amount of waste-water, however, was  
102 discarded by the system and replaced by fresh water in order to dilute contaminant concentration and keeping  
103 safe life condition both for fishes and bacteria.

104 Three different sizes of European Catfish (*Silurus glanis*) fingerlings (50, 300 and 400 g), with a stocking  
105 density of 90-100 kg·m<sup>-3</sup>, were separately farmed in each fish tank. Feeding rates were set as a percentage of  
106 the total fish biomass, starting from 4% for juveniles to 1.5% for adults. The fish feed used was commercial  
107 diet pellet of 2 mm diameter for small-size fishes and 4.5 mm for large-size fishes (Aller Aqua Group,  
108 Christiansfeld, Denmark) with 54% protein and 20% fat.

109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136

## 2.2. Experimental setup

The experiment was carried out in two phases. First, an experimental protocol was developed to quantify the water metabolism and the water losses of the aquaculture system. Subsequently, a small scale Deep Water Culture (DWC) hydroponic system was set up in order to evaluate lettuce (*Lactuca sativa* L. cv. Salanova multileaf) yield and water consumption either using the RAS effluent or three hydroponic solutions with different nutrient concentrations.

### 2.2.1. RAS water balance and efficiency parameters

The daily water balance of the RAS unit was calculated (Eq. 1) including all water inputs and outputs of the water metabolism occurring in the RAS room (Fig. 1). The considered water inputs were the consumption of fresh well water ( $Q_{ww}$ ) and the water vapour that entered the room through ventilation ( $Q_{v\_in}$ ). The water outputs were the evaporation taking place from the biofilter ( $Q_b$ ), the sedimenter ( $Q_s$ ), the fish tanks ( $Q_{ft}$ ) and the sump tank ( $Q_{st}$ ), the water assimilated by fishes ( $Q_f$ ), the water vapour that escaped the room through ventilation ( $Q_{v\_out}$ ), and the water discarded ( $Q_w$ ).

$$\text{Water inputs} = \text{Water outputs}$$

$$\text{Tap water consumption } (Q_{ww}) + \text{Ventilation } (Q_{v\_in}) = \text{Evaporation } (Q_b + Q_s + Q_{ft} + Q_{st}) + \text{Fish water assimilation } (Q_f) + \text{Ventilation } (Q_{v\_out}) + \text{Wastewater } (Q_w) \quad [\text{Eq. 1}]$$

Methods for defining each element of Eq. 1 are described below.

*Water consumption.* The amount of well water entering the system was measured daily with a water meter.

*Ventilation.* The water inputs and outputs as water vapour through the ventilation system of the room (expressed as  $\text{kg H}_2\text{O s}^{-1}$ ) were calculated according to Eq. 2, based on the absolute humidity (AH,  $\text{g}\cdot\text{m}^{-3}$ ), the air flow speed ( $v$ ,  $\text{m}\cdot\text{s}^{-1}$ ), and the area of the section crossed by the airflow ( $A_w$ ,  $\text{m}^2$ ).



$$Q_w \left[ \frac{\text{kg H}_2\text{O}}{\text{s}} \right] = AH \left[ \frac{\text{kg}}{\text{m}^3} \right] \cdot v \left[ \frac{\text{m}}{\text{s}} \right] \cdot A_w [\text{m}^2] \quad [\text{Eq. 2}]$$

The absolute humidity was calculated by employing an on-line psychrometric chart (<https://www.rotronic.com>) based on air pressure, air temperature, and relative humidity of the airflow. These parameters were measured 8 times in one month and the average values were used in the on-line tool. The air flow speed was measured with a propeller anemometer.

*Evaporation.* The water evaporation produced in the sediment, the fish tanks and the sump tank was calculated applying the Eq. 3, based on the evaporation coefficient ( $\theta$ ,  $\text{kg} \cdot \text{m}^{-2} \cdot \text{h}^{-1}$ ), the water surface area ( $A_s$ ,  $\text{m}^2$ ), and the difference between the saturated air maximum humidity ratio ( $x_s$ ,  $\text{kg H}_2\text{O} \cdot \text{kg}^{-1}$  of dry air) and the actual air humidity ratio ( $x$ ,  $\text{kg H}_2\text{O} \cdot \text{kg}^{-1}$  of dry air) above the water surface.

$$Q_i \left[ \frac{\text{kg H}_2\text{O}}{\text{d}} \right] = 24 \cdot \theta \left[ \frac{\text{kg}}{\text{m}^2 \cdot \text{h}} \right] \cdot A_s [\text{m}^2] \cdot (x_s - x) \left[ \frac{\text{kg H}_2\text{O}}{\text{kg dry air}} \right] \quad [\text{Eq. 3}]$$

The evaporation coefficient,  $\theta$ , results from Eq. 4, where  $v$  is the velocity of the air above the water surface ( $\text{m} \cdot \text{s}^{-1}$ ).

$$\theta \left[ \frac{\text{kg}}{\text{m}^2 \cdot \text{h}} \right] = 25 + 19v \left[ \frac{\text{m}}{\text{s}} \right] \quad [\text{Eq. 4}]$$

Note that the units of  $\theta$  do not match with each other as it is a purely empirical formula.

The actual air humidity ratio ( $x$ ) can be expressed as the ratio between the partial pressure of vapor in moist air ( $p_w$ ) to the atmospheric pressure of moist air ( $p_a$ ), where the factor 0.622 is the ratio between the molecular weight of water vapour ( $18.015 \text{ g} \cdot \text{mol}^{-1}$ ) and the average molecular weight of the other atmospheric gases ( $28.965 \text{ g} \cdot \text{mol}^{-1}$ ) (Shi et al., 2017) (Eq. 5).

$$x = \frac{0.622 p_w [\text{Pa}]}{p_a [\text{Pa}] - p_w [\text{Pa}]} \quad [\text{Eq. 5}]$$

164 The actual air humidity ratio and the saturated air humidity ratio were calculated based on the air relative  
 165 humidity, the air temperature, and the atmospheric pressure, using two online calculators of the thermodynamic  
 166 properties of moist air (<https://www.rotronic.com> and <http://www.tlv.com>), according to Hyland and Wexler  
 167 (1983). The relative humidity and the temperature of the air above the water surfaces of the fish tanks, the  
 168 sedimenter and the sump were measured with three different sensors, recording data each ten seconds. The air  
 169 speed at the water surface level was assumed as  $0.05 \text{ m}\cdot\text{s}^{-1}$  (Smith et al., 2014).  
 170 The water evaporation from the biofilter was calculated considering the difference between the biofilter  
 171 ventilation outflow humidity when the biofilter is switched on and when it is off (Eq. 6).

172


$$\begin{aligned}
 173 \quad Q_b \left[ \frac{\text{kg H}_2\text{O}}{\text{s}} \right] &= Q_{b,\text{on}} \left[ \frac{\text{kg H}_2\text{O}}{\text{s}} \right] - Q_{b,\text{off}} \left[ \frac{\text{kg H}_2\text{O}}{\text{s}} \right] = \\
 174 \quad &\left( \text{AH} \left[ \frac{\text{kg}}{\text{m}^3} \right] \cdot v \left[ \frac{\text{m}}{\text{s}} \right] \cdot A_w [\text{m}^2] \right)_{\text{on}} - \left( \text{AH} \left[ \frac{\text{kg}}{\text{m}^3} \right] \cdot v \left[ \frac{\text{m}}{\text{s}} \right] \cdot A_w [\text{m}^2] \right)_{\text{off}} \quad [\text{Eq. 6}]
 \end{aligned}$$

175

176 *Fish water assimilation.* The fish water assimilation ( $\text{L day}^{-1}$ ) was calculated by assuming water being 78.11%  
 177 of the final fresh body weight of European catfish (Żmijewski et al., 2006). The final amount of water stored  
 178 in the fish biomass was divided by the days of the growing cycle (365).

179

180 *Wastewater.* The amount of discarded water equals the capacity of the sedimenter, which is emptied daily.

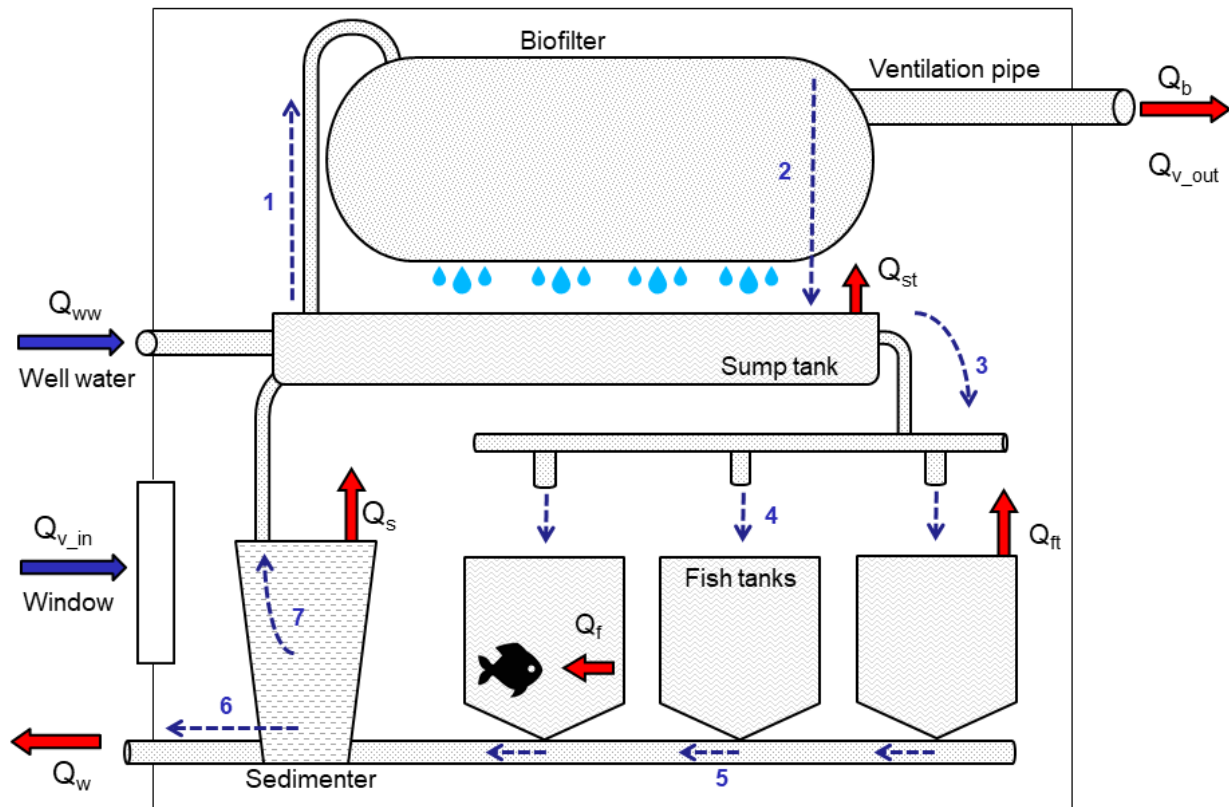

181

182 **Figure 1.** Graphical representation of the water flows across the aquaculture system. Dashed lines indicate  
 183 the water flow: the well water enters in the sump tank and is raised to the top of the biofilter (1), falls  
 184 through the biofilter net (2) and drops down again in the sump tank; from here it is distributed in the three  
 185 fish tanks (3 -4); then, flows towards the sedimenter (5) and, once filtered, cycle back to the sump tank (7),  
 186 from where restarts its cycle. Once a day, then, the sedimenter is emptied (6). The blue arrows represent  
 187 the water input ( $Q_{ww}$  Well water consumption,  $Q_{v\_in}$  Vapour flow entering through the ventilation system).  
 188 The red arrows represent the water output ( $Q_{v\_out}$  Vapour flow exiting through the ventilation system,  $Q_f$   
 189 Water assimilated by fishes,  $Q_{ft}$  Water evaporated by the fish tanks,  $Q_s$  Water evaporated by the sedimenter,  
 190  $Q_{st}$  Water evaporated by the sump tank,  $Q_b$  Water evaporated from the biofilter,  $Q_w$  Water discarded by  
 191 the system).

192

193 The RAS efficiency was, finally, evaluated in term of water use ( $m^3 H_2O kg^{-1} FW$ ), by dividing the total annual  
 194 water inflow of the system ( $m^3$ ) by the average annual fish fresh yield (kg) (Verdegem et al., 2006).

195

196 *2.2.2 Evaluation of lettuce cultivation in aquaponics vs traditional hydroponics*

197 Eight boxes of 30 L were employed to grow up the plants, covered by a polystyrene sheet with ten holes to  
 198 support the seedlings (transplanted at sixth leaf stage). Four water treatments were imposed at different  
 199 electrical conductivity (EC): Aqua (water from the RAS with EC 1.6 dS m<sup>-1</sup>), Hydro 1.6 (hydroponic solution  
 200 with EC 1.6 dS m<sup>-1</sup>), Hydro 2.0 (hydroponic solution with EC 2.0 dS m<sup>-1</sup>) and Hydro 3.0 (hydroponic solution  
 201 with EC 3.0 dS m<sup>-1</sup>). The initial composition, pH, EC and C:N ratio of the four nutrient solutions are described  
 202 in Table 1. All the boxes were connected to an air pump to guarantee oxygenation to the nutrient solution. Air  
 203 humidity and temperature were recorded by a sensor every ten minutes.

204

205 **Table 1:** Composition of the nutrient solutions of the treatments Aqua, Hydro 1.6, 2.0 and 3.0, respectively.

206

		Aqua	Hydro 1.6	Hydro 2.0	Hydro 3.0
<b>pH</b>		7.3	6.9	6.7	6.5
<b>EC</b>	dS·m <sup>-1</sup>	1.6	1.6	2	3
<b>NH<sub>4</sub><sup>+</sup></b>	mmol L <sup>-1</sup>	0.09	0.27	0.33	0.5
<b>NO<sub>3</sub><sup>-</sup></b>	mmol L <sup>-1</sup>	7.36	6.94	8.73	13.24
<b>K<sup>+</sup></b>	mmol L <sup>-1</sup>	0.58	6.13	7.67	11.5
<b>Na<sup>+</sup></b>	mmol L <sup>-1</sup>	4.32	0.9	1.1	1.2
<b>Ca<sup>2+</sup></b>	mmol L <sup>-1</sup>	3.4	2.93	3.67	5.5
<b>Mg<sup>2+</sup></b>	mmol L <sup>-1</sup>	0.43	0.8	1	1.5
<b>Cl<sup>-</sup></b>	mmol L <sup>-1</sup>	2.77	1.07	1.33	2
<b>S</b>	mmol L <sup>-1</sup>	1.35	1.07	1.33	2
<b>HCO<sub>3</sub><sup>-</sup></b>	mmol L <sup>-1</sup>	0.72	0.08	0.1	0.15
<b>P</b>	mmol L <sup>-1</sup>	0.09	1.07	1.33	2
<b>Fe</b>	μmol L <sup>-1</sup>	0.28	21.33	26.67	40
<b>Mn</b>	μmol L <sup>-1</sup>	0.2	2.67	3.33	5
<b>Zn</b>	μmol L <sup>-1</sup>	2.22	2.67	3.33	5

<b>B</b>	$\mu\text{mol L}^{-1}$	29.83	26.67	33.33	50
<b>Cu</b>	$\mu\text{mol L}^{-1}$	0.53	0.53	0.67	1
<b>Mo</b>	$\mu\text{mol L}^{-1}$	<0.1	0.27	0.33	0.5
<b>N tot</b>	$\text{mg L}^{-1}$	105.05	100.93	126.94	192.44
<b>C:N ratio</b>		0.083	0.010	0.009	0.009

---

207

208 *Water consumptions.* The evapotranspirative losses ( $\text{ET}_p$ ) were measured by reading the water level decrease  
209 inside the boxes through a graduated scale.

210

211 *Biomass production.* Once harvested, plants' shoots were immediately separated from roots and weighted in  
212 order to obtain the fresh weight (FW). Dry weight (DW) was determined after oven-drying the sample for  
213 three days at  $105^\circ\text{C}$ . According to Qiansheng et al. (2018) the lettuce root biomass in hydroponics accounts  
214 for only about the 10% of the total fresh biomass, therefore it was considered negligible and not taken into  
215 account for the calculation of the below-listed parameters. The dry matter percentage (DM) was calculated by  
216 the ratio between the lettuce head dry (g) and fresh (g) weight, and expressed as percentage.

217

218 *C:N ratio:* Total leaf N and C content, were measured on dry samples with a LECO CNS2000 elemental  
219 analyzer (LECO Corporation, St. Joseph, MI, USA).

220

221 *WUE.* Total water use efficiency ( $\text{g FW L}^{-1} \text{H}_2\text{O}$ ) was calculated as the ratio of the FW (g) of the plants of each  
222 box to the relative total water consumption (L) (Fallovio et al., 2009).

223

224 *NUE.* Water samples of the nutrient solution were collected at the beginning of exp. 2 and 3. These were  
225 analyzed for main macro and microelements by the Eurofins Agro water test laboratories (Binnenhaven 5 NL  
226 - 6709 PD, Wageningen, The Netherlands). The NUE ( $\text{g FW mg}^{-1} \text{N}$ ) was calculated by the ratio between the  
227 average fresh weight of the plants of each box (g) and the total elemental nitrogen available at the beginning  
228 of the growing cycle in the nutrient solution (mg) (Benincasa et al., 2011).

229

### 230 2.2.3. Design for a closed water cycle

231 With the aim of boosting the resources efficiency of the aquaculture system, a DWC hydroponic unit can be  
232 introduced in the already existing RAS to recover its water discharge and recycle it as nutrient solution for  
233 lettuce cultivation. In such a system, water requirements are only limited to those needed to compensate  
234 evaporative water losses. Plants in aquaponics play a key role in water quality control notably as concerns N-  
235 and P-containing nutrients (Goddek et al., 2015). For a proper operation of an aquaponics system, therefore,  
236 the plant cultivation must be dimensioned to the fish stocking density in order to ensure an efficient control of  
237 nutrient load.

238 Keeping the size of the actual RAS system, a design for an aquaponic system for lettuce-catfish production is  
239 here proposed. The proportion of the DWC beds is calculated through a parameter elaborated by Rakocy et al.  
240 (2006) called Feeding Rate Ratio (FRR) (Eq. 7), which express the relation between the fish feed amount  
241 introduced in the system and the plant growing area.

242

$$243 \quad \text{FRR} \left[ \frac{\text{g}}{\text{m}^2 \text{d}} \right] = \frac{\text{fish feed [g]}}{\text{plant area [m}^2\text{]} \cdot \text{day}} \quad [\text{Eq. 7}]$$

244

245 The optimum FRR for raft hydroponics varies from 60 to 100 g·m<sup>-2</sup>·day<sup>-1</sup> (Rakocy et al., 2006). Accordingly,  
246 for the purpose of this study, a FRR of 80 g·m<sup>-2</sup>·day<sup>-1</sup> for raft hydroponic lettuce production was set. The  
247 computations were done assuming that the production should be split and harvested in staggered phases to  
248 keep constant the optimal stocking density (Rakocy et al., 2006). A fish productive cycle of 12 months was  
249 assumed to allow obtaining adults of 2 kg (with a final stocking density of 100 kg·m<sup>-3</sup>) from fingerlings of 300  
250 g (data established according to the performance of previous cycles and literature data, e.g. Żmijewski et al.,  
251 2006). The fish production should be staggered to harvest once a year from each tank, with a time step of about  
252 17 weeks (the three harvests being distributed along the year). Starting from a plant at the sixth unfolded leaf  
253 stage, a productive growing cycle of 4 weeks was considered, setting a plant density of 16 plants m<sup>-2</sup> (Rakocy  
254 et al., 2006).

255

### 256 2.3. Statistical analysis

The experimental data were treated statistically using CoStat software package. A two-way analysis of variance (ANOVA) at 95% confidence was performed to test the influence of the growing cycle and the water source on evapotranspiration losses, biomass production, WUE and NUE. Means were compared using the LSD test at  $P \leq 0.05$ .

### 3. Results and discussion

#### 3.1. RAS water balance and efficiency parameters

The results of the water balance on the aquaculture unit showed that about 555 L of water flow through the system every day. A description of the water metabolism elements is reported in Table 2.

**Table 2.** Daily water input and output within the aquaculture system.

AQUACULTURE SYSTEMS			
INPUT		OUTPUT	
Air absolute humidity ( $\text{kg} \cdot \text{day}^{-1}$ )	$22.9 \pm 3.0$	Air absolute humidity ( $\text{kg} \cdot \text{day}^{-1}$ )	$52.6 \pm 1.41$
		Biofilter ( $\text{kg} \cdot \text{day}^{-1}$ )	$17.7 \pm 1.52$
		Sump tank ( $\text{kg} \cdot \text{day}^{-1}$ )	$6.7 \pm 0.26$
		Fish tanks ( $\text{kg} \cdot \text{day}^{-1}$ )	$5.8 \pm 0.16$
Well water ( $\text{L} \cdot \text{day}^{-1}$ )	532	Sedimenter ( $\text{kg} \cdot \text{day}^{-1}$ )	$0.9 \pm 0.09$
		Fish water assimilation ( $\text{L} \cdot \text{day}^{-1}$ )	0.70
		Water discharge ( $\text{L} \cdot \text{day}^{-1}$ )	460
		Undetermined losses ( $\text{L} \cdot \text{day}^{-1}$ )	10.45
<b>TOTAL INPUT</b>	$554.9 \pm 3.0$	<b>TOTAL OUTPUT</b>	$554.9 \pm 3.44$

The biofilter produced the highest evaporation losses ( $17.7 \text{ L} \cdot \text{day}^{-1}$ ), which resulted 62.5%, 67.2% and 95.2% higher than those generated from the sump, the fish tanks and the sedimenter ( $6.7$ ,  $5.8$ , and,  $0.9 \text{ L} \cdot \text{day}^{-1}$ ), respectively. This could be due to a peculiarity of the biofilter used in this system which exploits the water evaporation to cool down the air temperature.

Water use for catfish in the experimental RAS was  $0.59 \text{ m}^3 \cdot \text{kg}^{-1}$ , 2.5 folds higher than that recorded for tilapia production in RAS ( $0.24 \text{ m}^3 \cdot \text{kg}^{-1}$ ) (Eurofish, 2009). Previous experiences also suggest that water consumption values are highly variable in response to the fish productive system adopted: they range from  $0.5$  to  $0.7 \text{ m}^3 \cdot \text{kg}^{-1}$ .

276 <sup>1</sup> in a super-intensive recirculating system (Verdegem et al., 2006) or average 1 m<sup>3</sup>·kg<sup>-1</sup> in a RAS system  
277 (Bregnballe, 2015) but also increase up to 45 m<sup>3</sup>·kg<sup>-1</sup> in an extensive pond system (Verdegem et al., 2006).  
278 The average fish yield of the studied RAS was 329 kg·year<sup>-1</sup>, which corresponds to a total amount of water  
279 assimilated by the fish of 257 L.

280

### 281 **3.2 Evaluation of lettuce cultivation in aquaponics vs traditional hydroponics**

282

283 **Climatic condition.** Exp. 1 was performed between July and August 2016. The minimum, average and  
284 maximum temperatures were respectively 17.0, 28.4 and 46.0°C in July and 13.7, 23.5 and 34.4°C in August.  
285 The mean daily temperature was higher than the average monthly temperature for 13 days. Exp. 2 was  
286 performed between the last days of September and October 2016. The minimum, average and maximum  
287 temperatures were respectively 14.5, 21.1 and 34.0°C in September and 12.0, 18.0 and 30.5°C in October. The  
288 mean daily temperature was higher than the average temperature for 17 days. Exp. 3 was performed between  
289 June and July 2017. The minimum, average and maximum temperatures were respectively 16.0, 24.3 and  
290 50.0°C in June and 17.0, 23.9 and 39.0°C in July. Mean daily temperature was higher than the average  
291 temperature for 20 days. The absence of an automated system for temperature management did not allow to  
292 prevent the occurrence of extreme temperatures.

293

294 **Water and nutrient consumption.** The water consumptions did not show statistically significant differences  
295 (P-value>0.05) among the four treatments (Hydro 1.6, Hydro 2.0, Hydro 3.0 and Aqua), although seasonal  
296 variations in total water consumption were observed among the three experiments. The average daily amount  
297 of evapotranspiration was 52.0, 27.3 and 58.4 mL·head<sup>-1</sup>·day<sup>-1</sup> for the exp. 1, 2 and 3, respectively. Similar  
298 results were observed by Ciolkosz et al. (1998) and Conversa et al. (2004), who recorded respectively ET  
299 values comprised between 24 and 178 mL·head<sup>-1</sup>·day<sup>-1</sup> and between 76 to 214 mL·head<sup>-1</sup>·day<sup>-1</sup> in lettuce grown  
300 in hydroponics. The lowest ET value were recorded in the exp. 2, which coincided with the lower temperatures  
301 experienced during the autumn season. The composition of the nutrient solutions at the end of the experiments  
302 is reported in Table 3. In all cycles the EC of the treatments Hydro 1.6 and 2.0 was reduced from the initial  
303 value, whereas an increase in EC in both Aqua and Hydro 3.0 treatments was observed during cycles 1 and 3.



304 A pH increase was observed for all the nutrient solutions in every cycle, with special emphasis for the  
 305 treatments Hydro 1.6 and 2.0. The ammonium concentration dropped close to zero in all the treatments, while  
 306 the nitrate concentration increased, especially in hydroponic. The potassium, phosphorus, molybdenum and  
 307 manganese concentrations in aquaponics, already low at the beginning of the experiment, reached almost zero  
 308 at the end of the three cycles, while the final potassium and molybdenum concentration in hydroponics was  
 309 increased from the initial value, possibly as a consequence of water evaporation and root selective uptake  
 310 (Albornoz and Lieth, 2015). The aquaponics iron concentration, instead, remained almost constant or  
 311 increased, probably due to both the solution evaporation and the lower iron availability when pH is above 7.  
 312 Calcium concentration, as well, did not vary largely in aquaponics while it was one forth on average in the  
 313 other solutions. This might be attributed to the uptake competition played by the sodium ion, since its initial  
 314 concentration in aquaponics was 4-folds higher than in hydroponics (Albornoz and Lieth, 2015).

315

316 **Table 3:** Composition of the nutrient solutions of the treatments Aqua, Hydro 1.6, 2.0 and 3.0 at the end of the  
 317 three experiments.

		Aqua			Hydro 1.6			Hydro 2.0			Hydro 3.0		
Cycle		1	2	3	1	2	3	1	2	3	1	2	3
<b>pH</b>		7,52	7,76	7,65	7,55	7,9	7,7	6,9	7,14	7,7	6,4	7,05	6,95
<b>EC</b>	dS·m <sup>-1</sup>	1,85	1,3	1,8	1,5	1,2	1,25	1,8	1,45	1,25	3,25	2,65	3,05
<b>NH<sub>4</sub><sup>+</sup></b>	mmol L <sup>-1</sup>	<0,1	<0,1	< 0,1	<0,1	<0,1	< 0,1	<0,1	<0,1	< 0,1	<0,1	<0,1	< 0,1
<b>NO<sub>3</sub><sup>-</sup></b>	mmol L <sup>-1</sup>	9,2	5,7	4,85	1,8	0,4	< 0,1	3,45	1,6	< 0,1	8,7	6,3	4,25
<b>K<sup>+</sup></b>	mmol L <sup>-1</sup>	0	<0,1	< 0,2	9	6,45	8,4	11,9	8,35	8,4	24,1	17,6	22,6
<b>Na<sup>+</sup></b>	mmol L <sup>-1</sup>	5,35	3,55	9,65	1,4	1,4	1,95	1,2	1,3	1,95	1,35	1,55	2,2
<b>Ca<sup>2+</sup></b>	mmol L <sup>-1</sup>	4,8	3,5	4,5	0,65	0,65	0,75	0,85	0,85	0,75	2	1,4	1,1
<b>Mg<sup>2+</sup></b>	mmol L <sup>-1</sup>	0,55	0,4	0,5	0,25	0,2	0,2	0,2	0,2	0,2	0,3	0,3	0,2
<b>Cl<sup>-</sup></b>	mmol L <sup>-1</sup>	3,85	2,55	5,05	2,75	2,55	2,25	3,05	2,8	2,25	5,1	4,75	5,65
<b>S</b>	mmol L <sup>-1</sup>	2,05	1,5	2,55	2,9	2,35	3,8	3,25	2,75	3,8	5,35	4,35	6,35
<b>HCO<sub>3</sub><sup>-</sup></b>	mmol L <sup>-1</sup>	0,15	0,8	3,85	0,4	1,5	0,95	0,1	0,9	0,95	<0,1	0,35	0,2
<b>P</b>	mmol L <sup>-1</sup>	<0,04	<0,04	< 0,04	0,575	0,42	0,81	1,35	0,59	0,81	3,055	1,325	2,32
<b>Fe</b>	μmol L <sup>-1</sup>	0,35	0,2	0,55	21,5	12	28,5	11,15	16,5	28,5	17,5	23	81,5
<b>Mn</b>	μmol L <sup>-1</sup>	0,1	< 0,1	< 0,1	0,2	0,15	0,15	0,1	0,15	0,15	1,75	0,8	0,25
<b>Zn</b>	μmol L <sup>-1</sup>	2,4	2,85	0,15	24	7,4	8,35	48,5	8,65	8,35	75	30,5	14

<b>B</b>	$\mu\text{mol L}^{-1}$	36	21,5	91	53	44	82	65,5	58	82	110	99,5	143
<b>Cu</b>	$\mu\text{mol L}^{-1}$	0,35	0,45	0,95	1,3	1,4	3,15	1,1	1,7	3,15	2,05	1,7	3,85
<b>Mo</b>	$\mu\text{mol L}^{-1}$	0	< 0,1	< 0,1	1,7	0,4	0,85	1,35	0,4	0,85	1,55	0,6	1,3
<b>N tot</b>	$\text{mg L}^{-1}$	130,12	81,09	69,19	26,47	6,86	2,52	49,58	23,67	2,52	123,12	89,50	60,79
<b>C:N ratio</b>		0,014	0,118	0,668	0,181	2,625	4,526	0,024	0,457	4,526	0,009	0,047	0,040

318


319 **Yield.** Considering that not statistically significant interactions were detected between the two experimental  
320 factors (growing cycle and water source), mean values are used for presenting yield data. Lettuce grew the  
321 least in aquaponics ( $92.3 \text{ g} \cdot \text{plant}^{-1}$ ), whereas higher biomass productions were achieved in the Hydro 2.0 and  
322 3.0 (mean value of  $120.3 \text{ g} \cdot \text{plant}^{-1}$ ) similarly to previous studies on aeroponically grown lettuce (Albornoz and  
323 Lieth, 2015). The absence of yield differences between Hydro 2.0 and Hydro 3.0 shows that nutrients in the  
324 latter resulted in luxury consumption rather than increasing biomass production nor leading to salinity  
325 symptoms (Nozzi et al., 2018).

326 A lower performance in aquaponics versus hydroponics was previously described by El Sayed and Samir  
327 (2015), and Johnson et al. (2017), whereas Pantanella et al. (2012) and Delaide et al. (2016) did not observe  
328 differences in yield among the two growing systems. The lower yield in aquaponics may be associated to  
329 reduced  $\text{K}^+$ ,  $\text{P}^+$ ,  $\text{Fe}^{2+}$  and  $\text{Mn}^{2+}$  concentrations in the nutrient solution (Rakocy et al., 2007). The amount of  
330 these nutrients in aquaponics is often not adequate to the plant requirements due to their low concentration in  
331 most of the commercial fish feeding formulations, and because part of them precipitate and is lost in the form  
332 of fish solid excretion (Rakocy et al., 2007; Goddek et al., 2015). Besides, to counteract the pH drops due to  
333 the bacterial nitrification process, a bicarbonate buffer was periodically added to the RAS circulating medium.  
334 The subsequent higher  $\text{HCO}_3^-$  concentration in the aquaponics solution, combined with the higher pH (Table  
335 1), may have contributed to reduce the nutrient solubility and absorbability (Pignata et al., 2017), especially  
336 for phosphorous, iron, manganese, magnesium and calcium (Trejo-Téllez and Gómez-Merino, 2012).  
337 Furthermore, it has also been suggested that the bacterial community from the aquaponics may compromise  
338 the nutrient availability by consuming nutrients or by increasing the energetic cost to import them across the  
339 root interface (Wielgosz et al., 2017). Goddek et al. (2015) stated that aquaponics can match hydroponics when  
340 all the parameters are controlled, and the bacterial community is fully mature. In the current study, the nutrient

341 imbalance in the aquaponics water solution may indicate that the fish stocking rate and/or their dietary  
342 composition need to be adjusted to supply the plants with the proper nutrients amount.

343 Despite the lowest yield, however, the DM% and C:N ratio in leaf tissues were significantly higher in  
344 aquaponics than in hydroponics (Fig. 1). This may depend on the different nutrient composition and availability  
345 in the two growing systems. As already mentioned, indeed, the C:N ratio of the nutrient solution in aquaponics  
346 was, 8.7-fold higher than the average value in the three hydroponic treatments (Table 1). Moreover, as stated  
347 by Nozzi et al. (2018) a P deficiency in the nutrient solution (Table 1) reduces the root N uptake. This, in turn,  
348 induces accumulation of non-structural carbohydrates (e.g. organic acids and sugars) for the cellular  
349 osmoregulation, resulting in a DM increase and, consequently, also in changes in the C:N ratio. The absence  
350 of significant variations in DM among the hydroponic treatments, on the other hand, is in line with the result  
351 of Ünlükara et al. (2008) and Scuderi et al. (2009) which reported a nearly constant DM content in plants  
352 growing under variable salinities, even over 3 dSm<sup>-1</sup>.

353

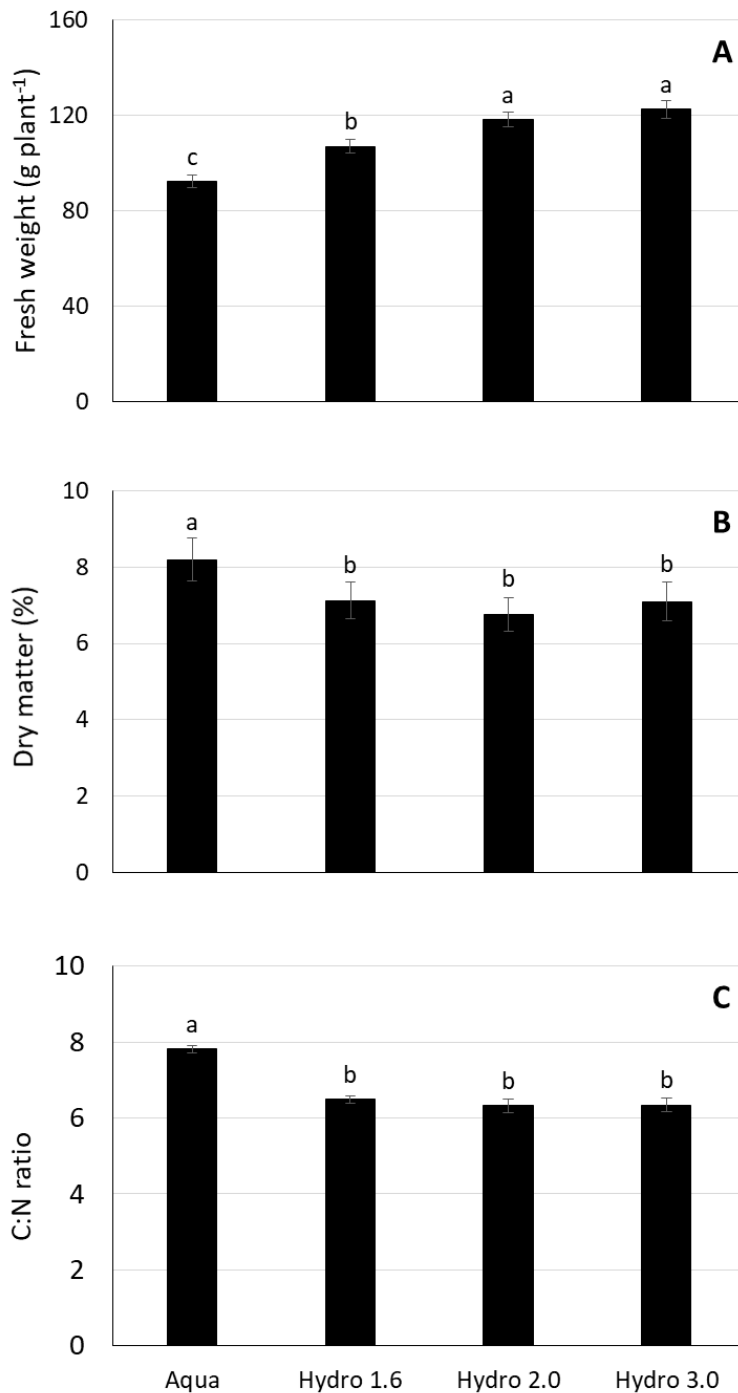

354


355 **Figure 1.** Fresh weight (A), dry matter (B), and C:N ratio (C) of lettuce plants grown under different water  
 356 regimes. Data referring to exp. 1, 2 and 3 are indicated as mean  $\pm$  SE. Different letters indicate significant  
 357 differences at  $P \leq 0.05$ .

358

359 **NUE.** Given that the interaction between the two experimental factors (growing cycle and water source) was  
 360 not statistically significant, the mean values for NUE were used. In the hereby presented experiments, NUE in  
 361 aquaponics (0.34 g FW·mg<sup>-1</sup> N) was significantly lower than in Hydro 1.6 and 2.0 (0.5 g FW·mg<sup>-1</sup> N on

average), but statistically non different from the Hydro 3.0 treatment ( $0.33 \text{ g FW} \cdot \text{mg}^{-1} \text{ N}$ ). The lower performance in aquaponics may, again, depend on the different ratio of nitrogen forms in the nutrient solution. Ammonia ( $\text{NH}_4\text{-N}$ ) level in aquaponics was, in fact, below  $0.1 \text{ mmol} \cdot \text{L}^{-1}$  (Table 1) due to the nitrification operated by the bacteria of the RAS biofilter. Despite most plants prefer  $\text{NO}_3^-$  over  $\text{NH}_4^+$  as nitrogen source, the  $\text{NO}_3^-$  acquisition and assimilation is more energy demanding than ammonium and, then, a 1:3 ratio of  $\text{NH}_4^+:\text{NO}_3^-$ , compared with nitrate alone as the sole source of N, showed to be beneficial to plant growth and yield in hydroponics (Savvas et al., 2006).

Increasing the nitrogen fertilization and uptake may not necessarily lead to improved crop yield and NUE (M'hamdi et al., 2014). A similar behaviour was observed in the present experiment when, rising the EC up to  $3 \text{ dS} \cdot \text{m}^{-1}$ , (N concentration of  $243 \text{ mg} \cdot \text{L}^{-1}$ ), the yield did not increase, leading to a decrease in NUE (Fig. 2). This is consistent with the findings of Stefanelli, Winkler and Jones (2011) who reported increased lettuce NUE at N concentration from 40 to  $75 \text{ mg} \cdot \text{L}^{-1}$ , reaching a plateau at  $150 \text{ mg} \cdot \text{L}^{-1}$  and with no subsequent increases between 400 and  $2400 \text{ mg} \cdot \text{L}^{-1} \text{ N}$ . Similarly, according to Mahlangu et al. (2016), a N concentration of  $100\text{-}120 \text{ mg} \cdot \text{L}^{-1}$  is enough to improve growth, yield and quality parameters of hydroponic lettuce. In the present case, the N concentration at  $2.0 \text{ dS} \cdot \text{m}^{-1}$  ( $162.0 \text{ mg} \cdot \text{L}^{-1} \text{ N}$ ) enhanced NUE and maximized the production, while the increased nitrogen input in Hydro 3.0 ( $243 \text{ mg} \cdot \text{L}^{-1} \text{ N}$ ) resulted in a NUE decline with no further yield increase.

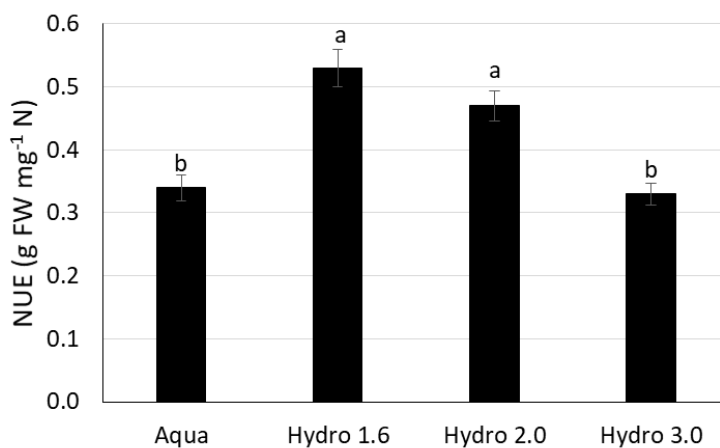


**Figure 2.** Nitrogen use efficiency (NUE) of lettuce plants grown under different water regimes. Data referring to exp. 2 and 3 are indicated as mean  $\pm$  SE. Different letters indicate significant differences at  $P \leq 0.05$ .

**WUE.** The interaction between the growing season and the water source significantly affected the lettuce WUE. Aquaponics always showed the lowest WUE [69.8 g FW·L<sup>-1</sup> H<sub>2</sub>O for exp. 1, 98.5 g FW·L<sup>-1</sup> H<sub>2</sub>O for exp. 2 and 48.1 g FW·L<sup>-1</sup> H<sub>2</sub>O for exp. 3] (Fig. 3). This is probably due to a decrease in the photosynthetic efficiency rather than in the leaf evaporation as no difference in water consumption arose among aquaponics and hydroponics treatments (De Costa and Ariyawansa, 1996). In addition, it is worth to mention that Na<sup>+</sup> concentration in aquaponics was 4-folds higher than in hydroponics (Table 1). As already observed by Tzortzakis (2009), moderate sodium stress is more likely to affect elemental absorption by competition than interfering with the root water uptake, leading to ions imbalance, restricted nutrient uptake and consequent yield reduction. The production of osmolytes to counteract the specific Na<sup>+</sup>-related osmotic stress may be another justification of the higher leaf DM encountered in aquaponics. In conclusion, the nutrient imbalance in aquaponics, namely the higher sodium concentration combined with the lack in potassium, phosphorous, iron and manganese, had a more negative impact on plant yield and WUE than the higher water conductivity in the hydroponic treatments.

In hydroponics, different WUE trends were observed in the three cycles. In exp. 1 no WUE differences arose between the three treatments. In exp. 2, the WUE of the Hydro 2.0 and 3.0 treatments were comparable but resulted significantly higher than the Hydro 1.6. In exp. 3, significant differences could only be found between Hydro 1.6 and Hydro 3.0, the latter presenting higher values. According to the obtained results, it may be argued that an EC increase over 1.6 dS·m<sup>-1</sup> could possibly boost WUE. Moreover, although significant differences could be observed between the treatments Hydro 1.6 and Hydro 3.0, the latter never differed significantly from the intermediate Hydro 2.0. Hence, bearing in mind the objective to contain the productive costs and the chemical input, using an EC of 2.0 in place of 1.6 dS·m<sup>-1</sup> can boost the crop yield without interfering with the NUE and WUE. The lower WUE observed in the summer cycles (exp. 1 and 3) may be due to the higher solar radiation and temperature which may have increased the atmospheric evaporative demand and the plant respiratory losses (Fallico et al., 2009) as compared with the autumn cycle (exp. 2). A similar behaviour was observed also by Shaban et al. (2016), who observed a WUE increase when lettuce was subjected to irrigation water cooling and shading. Lettuce, indeed, is a short-day cool season crop with an optimum temperature range of 7-24 °C (Shaban et al., 2016). Under warmer condition the plant increase the transpiration rate to regulate the leaf temperature, through the mechanism of

412 evaporative cooling. However, although transpiration is positively correlated to biomass accumulation, upon  
 413 elevate temperature the plant reduces its ability to regulate the water relations and further transpiration losses  
 414 do not provide extra biomass gain, lowering thereby the WUE (Zhang et al., 2015). The high temperature,  
 415 combined with the high radiation, may have also resulted in reaching the light saturation point, inducing  
 416 photoinhibition and stomatal closure (Hunt et al., 1984). Hence, it may be argued that the decreased  
 417 photosynthesis efficiency and carbon assimilation, associated with an increase in the canopy transpiration,  
 418 might have negatively affected the plant WUE during the two summer cycles.  
 419 The achieved WUE values are, however, consistent with the results of Chabite et al. (2017) that also  
 420 obtained values among 29.7 and 142.9 g·L<sup>-1</sup> for lettuce grown using different nutrient solutions.

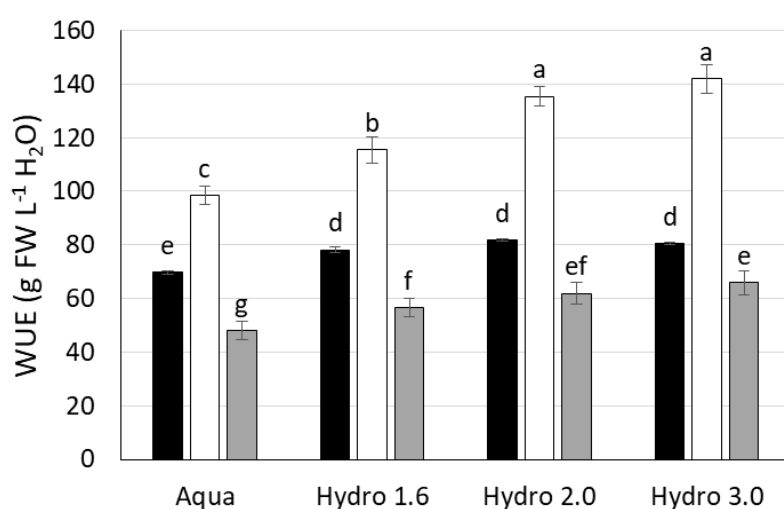

422  
 423 **Figure 3.** Water Use Efficiency (WUE) of lettuce plants grown under different water regimes. Black bars  
 424 represent results of exp. 1, white bar represent results of exp. 2, grey bar represent results of exp. 3. Data are  
 425 expressed as mean ± SE. Different letters indicate significant differences at  $P \leq 0.05$ .


### 426 427 **3.2. Design proposal to convert the RAS into a catfish-lettuce aquaponic system**

428 In this section, a design for introducing a lettuce DWC hydroponic unit into the already existing RAS is  
 429 proposed, with the goal to transform it in a closed productive aquaponic system.

430 According to Eq. 1 and the data from the Table 2, the total water input and output within the RAS consisted  
 431 of 554.9 L·day<sup>-1</sup>. The estimated potential catfish production of the current RAS is 329 kg·year<sup>-1</sup>. According to

432 the calculation procedure elaborated by Rakocy et al. (2006), a lettuce growth bed area of  $9.63 \text{ m}^2$  is required  
 433 to satisfy the nitrogen filtration demand at this productive rate. Keeping the suggested plant density of 16 plants  
 434  $\text{m}^{-2}$ , the projected  $10 \text{ m}^2$  DWC plant may host up to 160 lettuces per month. According to the attained results  
 435 on the lettuce mean water consumption, i.e.  $45.9 \text{ mL} \cdot \text{head}^{-1} \cdot \text{day}^{-1}$ , an average water consumption ( $Q_{\text{eva}_p}$ ) of  
 436  $7.3 \text{ L} \cdot \text{day}^{-1}$  is expected for a raft system hosting 160 plants. The current well water input ( $Q_{\text{ww}} = 532 \text{ L} \cdot \text{day}^{-1}$ )  
 437 could, therefore, be reduced to the amount needed to replace the water lost by evaporation from the RAS ( $Q_{\text{eva}_f}$   
 438  $= 41.6 \text{ L} \cdot \text{day}^{-1}$ ), from the hydroponics tubs ( $Q_{\text{eva}_p} = 7.3 \text{ L} \cdot \text{day}^{-1}$ ), and the summed water withheld in the fish  
 439 tissues ( $Q_f = 0.7 \text{ L} \cdot \text{day}^{-1}$ ) (Figure 4). With the introduction of the proposed hydroponic unit, then, the RAS  
 440 water discharge ( $Q_w = 460 \text{ L} \cdot \text{day}^{-1} \cdot \text{m}^{-2}$ ) will be fetched to supply the DWC system and the system water  
 441 metabolism will improve as the water output will decrease from 554.9 to  $102.53 \text{ L} \cdot \text{day}^{-1}$  (Table 4).  
 442 By installing an environment control system in the greenhouse, the lettuce production can be realized  
 443 continuously over the 365-days cycle of catfish. A staggered crop production system, however, is suggested  
 444 to keep the water quality relatively constant and allow the lettuce harvest with regular cadency. Assuming a  
 445 30-day crop cycle, then, the lettuce production can be staggered so that four growth stages can be  
 446 simultaneously cultivated in one month and one-fourth of the lettuces can be weekly harvested (40 lettuce  
 447 heads). For the fish production, as well, three fish ages should be contemporary reared in the three tanks in  
 448 order to produce an effluent whose composition remains relatively constant. Accordingly, the fish from one  
 449 tank will be stocked once every four months, with an expected potential production of  $82.3 \text{ kg quadrimester}^{-1}$ .  
 450 The yearly production, then, will consist of 329 kg of fish meat plus 1920 lettuce heads, which correspond to  
 451 a biomass production of  $17.7 \text{ kg} \cdot \text{m}^{-2}$ , if the average lettuce FW obtained in aquaponics during the hereby study  
 452 ( $92.3 \text{ g} \cdot \text{plant}^{-1}$ ) is considered.  
 453



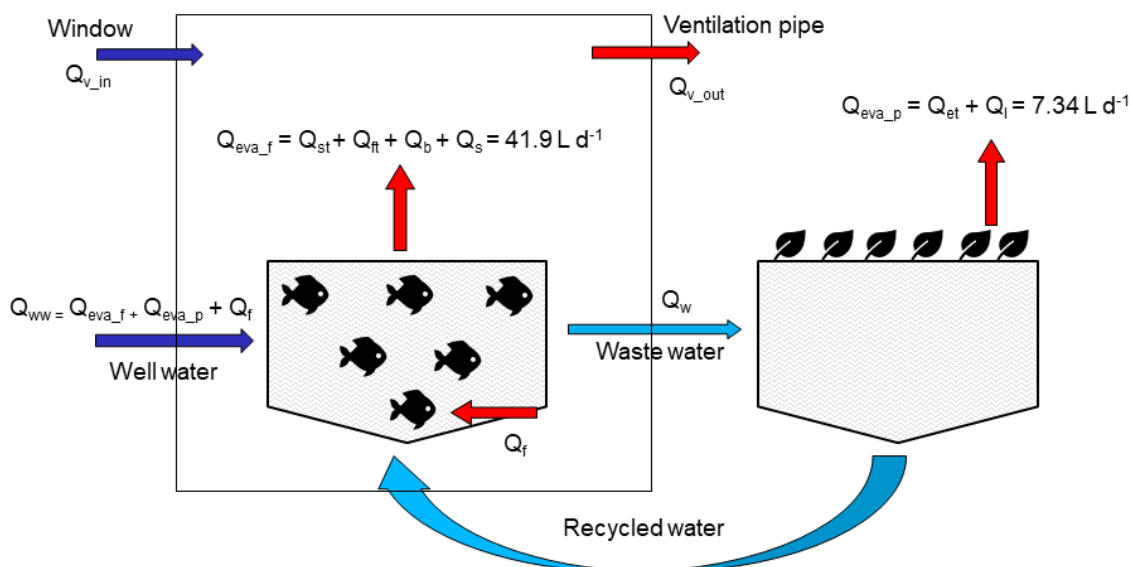

454

455 **Figure 4.** Graphical representation of the water flows across the proposed catfish-lettuce aquaponic system.

456 The dark-blue arrows represent the water input:  $Q_{ww}$  Well water consumption,  $Q_{v\_in}$  Vapour flow entering  
 457 through the ventilation system. The red arrows represent the water output:  $Q_{eva\_p} = (Q_{ft}$  Water evaporated  
 458 by the fish tanks +  $Q_s$  Water evaporated by the sedimenter +  $Q_{st}$  Water evaporated by the sump tank +  $Q_b$   
 459 Water evaporated from the biofilter),  $Q_f$  Water assimilated by fishes,  $Q_{v\_out}$  Vapour flow exiting through  
 460 the ventilation system,  $Q_w$  Water discarded by the system,  $Q_{eva\_p} = (Q_{et}$  Water evaporated by the raft  
 461 hydroponic system +  $Q_i$  Water assimilated by the plant tissue. The light-blue arrows represent the circular  
 462 water pathway among the two aquaculture and hydroponic sub-units.

463

464 **Table 4.** Comparison of the water input-output and of the marketable products obtainable from the current  
 465 RAS system and from the proposed catfish-lettuce aquaponics system. All the water-related items are  
 466 expressed in  $L\ day^{-1}$ :  $Q_{ww}$  Well water consumption,  $Q_{v\_in}$  Vapour flow entering through the ventilation  
 467 system,  $Q_{eva}$  Water evaporated by the aquaculture tanks and/or the hydroponic tanks,  $Q_f$  Water assimilated  
 468 by fishes,  $Q_{v\_out}$  Vapour flow exiting through the ventilation system, and  $Q_w$  Water discarded by the system.

Total input	water input	Well input	water output	Total water output	Water discharge	Evaporation losses	Yield
$(Q_{v\_in} + Q_{ww})$		$(Q_{ww})$		$(Q_w + Q_{eva} + Q_f + Q_{v\_out})$	$(Q_w)$	$(Q_{eva})$	

<b>Current scenario</b>	554.9	532	554.9	460	41.6	360 kg year <sup>-1</sup> fish meat
<b>Proposed scenario</b>	72.84	49.64	102.53	/	48.94	360 kg year <sup>-1</sup> fish meat 1920 lettuce heads year <sup>-1</sup>

#### 469 4. Conclusion

470 The present study contributes to the research in aquaponics, offering innovative figures on the water  
471 consumption of a catfish recirculating aquaculture and the potential for wastewater saving associated with  
472 lettuce production in aquaponics. The results of this study indicated that the considered RAS aquaculture  
473 system has a daily water consumption of 555 L·day<sup>-1</sup>, out of which the 83% is direct water discharge from the  
474 system while evaporation losses from the system' tubs account for 31 L·day<sup>-1</sup> and humidity detracting from  
475 the plant room accounts for 53 L·day<sup>-1</sup>. With the introduction of a hydroponic component into the system, the  
476 discharged water can be recovered and used as nutrient solution for a 10 m<sup>2</sup> raft hydroponic system. Additional  
477 researches are, however, needed to lower the component of evaporative losses by the system.

478 The nutrients requiring supplementation in the hydroponic unit would be ammonium, potassium,  
479 phosphorous, iron and manganese, whereas the amount of dissolved sodium and bicarbonate ions may be too  
480 elevated to sustain plant productivity. Such nutrient imbalance may be the reason of the lower observed yield,  
481 WUE and NUE in aquaponics. Given the already high level of nitrate and sodium, a further increase in the fish  
482 stocking density should be avoided while the strategy of integrating the aquaponic solution with synthetic  
483 mineral elements, as proposed by Delaide et al. (2016), could be tested to improve the nutrient solution  
484 composition. This option would still allow reduced fertilizer costs and environmental impacts compared to  
485 traditional hydroponic, but more in-depth investigations would be necessary to determine the nutrient  
486 supplementation effects on fish physiology. A change in the fish feeding diets should also be considered. Fish  
487 feed contains 0.1 to 0.3% added sodium (Mallick and Rahman, 2005), although such high concentrations is  
488 not really necessary to fishes (Rakocy et al., 2007). In order to reduce the levels of Na<sup>+</sup> in the fishery  
489 wastewater, then, alternative feed formulations having higher level of potassium and plant-protein, instead of  
490 animal-protein, should be tested for combined catfish-lettuce growth. Finally, studies on the role played by

491 both microorganism and organic compounds on the crop performances could contribute to make this picture  
492 more complete.

493 In conclusion, the aquaponics system overall environmental sustainability builds on the avoided impact  
494 associated with both the RAS wastewater released into the environment and the less chemical input needed for  
495 lettuce hydroponic production as compared with two systems operating independently.

496

## 497 **Acknowledgements**

498 The authors would like to thank Prof. Lorenzo Barbanti for critically revising the manuscript.

## 499 **REFERENCES**

- 500 Al-Hafedh, Y.S., Alam, A., Beltagi, M.S., 2008. Food Production and Water Conservation in a Recirculating  
501 Aquaponic System in Saudi Arabia at Different Ratios of Fish Feed to Plants. *J. World Aquac. Soc.* 39,  
502 510–520. [https://doi.org/https://doi.org/10.1111/j.1749-7345.2008.00181.x](https://doi.org/10.1111/j.1749-7345.2008.00181.x)
- 503 Alborno, F., Lieth, J.H., 2015. Over fertilization limits lettuce productivity because of osmotic stress. *Chil. J.*  
504 *Agric. Res.* 75, 284–290. <https://doi.org/10.4067/S0718-58392015000400003>
- 505 Alexandratos, N., Bruinsma, J., 2012. World agriculture towards 2030/2050: the 2012 revision Global  
506 Perspective Studies Team FAO Agricultural Development Economics Division, Agricultural Development  
507 Economics (ESA) The Food and Agriculture Organization of the United Nations Rome, Italy. Rome, FAO.  
508 [https://doi.org/10.1016/S0264-8377\(03\)00047-4](https://doi.org/10.1016/S0264-8377(03)00047-4)
- 509 Benincasa, P., Guiducci, M., Tei, F., 2011. The nitrogen use efficiency: Meaning and sources of variation-case  
510 studies on three vegetable crops in central Italy. *HortTechnology* 21, 266–273.  
511 <https://doi.org/10.21273/HORTTECH.21.3.266>
- 512 Bregnballe, J., 2015. A Guide to Recirculation Aquaculture. An introduction to the new environmentally  
513 friendly and highly productive closed fish farming systems, 2015 Editi. ed. FAO and EUROFISH.
- 514 Chabite, I.T., Lei, Z., Ningning, Y., Qiang, F., Haiye, Y., 2017. Mode of Managing Nutrient Solution Based  
515 on N Use Efficiency for Lettuce (*Lactuca sativa* L.). *J. Food Sci. Eng.* 7, 29–37.  
516 <https://doi.org/10.17265/2159-5828/2017.01.003>

517 Ciolkosz, D.E.E., Albright, L.D.L., Both, A.J.J., 1998. Characterizing evapotranspiration in a greenhouse  
518 lettuce crop. *Acta Hortic.* 255–262. <https://doi.org/10.17660/ActaHortic.1998.456.29>

519 EU. 2018. Communication from the commission to the european parliament, the council, the european  
520 economic and social committee and the committee of the regions a sustainable Bioeconomy for Europe:  
521 Strengthening the connection between economy, society and the environment

522 Conversa, G., Santamaria, P., Gonnella, M., 2004. Growth, yield, and mineral content of butterhead lettuce  
523 (*Lactuca sativa* var. capitata) grown in NFT. *Acta Hortic.* 659, 621–628.  
524 <https://doi.org/10.17660/ActaHortic.2004.659.80>

525 De Costa, W., Ariyawansa, B., 1996. Effects of water stress on water use efficiency of different varieties of  
526 common bean (*Phaseolus vulgaris* L.). *J. Natl. Sci. Counc. Sri Lanka* 24, 253–266.  
527 <https://doi.org/http://dx.doi.org/10.4038/jnsfsr.v24i4.5558>

528 Delaide, B., Goddek, S., Gott, J., Soyeurt, H., Jijakli, M.H., 2016. Lettuce (*Lactuca sativa* L. var. Sucrine)  
529 growth performance in complemented aquaponic solution outperforms hydroponics. *Water* 8, 1–11.  
530 <https://doi.org/10.3390/w8100467>

531 El Sayed, G.K., Samir, A.A., 2015. Effect of Flow Rate and Length of Gully on Lettuce Plants in Aquaponic  
532 and Hydroponic Systems. *J. Aquac. Res. Dev.* 06, 6–10. <https://doi.org/10.4172/2155-9546.1000318>

533 Endut, A., Sultan, U., Abidin, Z., Lananan, F., Sultan, U., Abidin, Z., Hajar, S., Hamid, A., Sultan, U., Abidin,  
534 Z., Jusoh, A., Autonomous, I., View, A.W., 2016. Balancing of nutrient uptake by water spinach (*Ipomoea*  
535 *aquatica*) and mustard green (*Brassica juncea*) with nutrient production by African catfish (*Clarias*  
536 *gariiepinus*) in scaling aquaponic recirculation system. *Desalin Water Treat* 57–70.  
537 <https://doi.org/10.1080/19443994.2016.1184593>

538 Espinosa Moya, E., Angel Sahagún, C., Mendoza Carrillo, J., Albertos Alpuche, P., Álvarez-González, C.,  
539 Martínez-Yáñez, R., 2017. Herbaceous plants as part of biological filter for aquaponics system. *Aquac Res*  
540 47, 1716–1726.

541 Eurofish, 2009. A Handbook for Sustainable Aquaculture: A Product of SustainAqua, Project No. ed. Eurofish  
542 International Organisation, Copenhagen.

543 Fallovo, C., Roupael, Y., Cardarelli, M., Rea, E., Battistelli, A., Colla, G., 2009. Yield and quality of leafy  
 544 lettuce in response to nutrient solution composition and growing season. J. Food, Agric. Environ. 7, 456–  
 545 462.

546 FAO, 2018. The State of World Fisheries and Aquaculture 2018 - Meeting the sustainable development goals.  
 547 Rome. Licence: CC BY-NC-SA 3.0 IGO.

548 FAO, 2016. Achieving Blue Growth, FAO. <https://doi.org/10.1007/978-3-319-63498-2>

549 Goddek, S., Delaide, B., Mankasingh, U., Ragnarsdottir, K.V., Jijakli, H., Thorarinsdottir, R., 2015.  
 550 Challenges of sustainable and commercial aquaponics. Sustain. 7, 4199–4224.  
 551 <https://doi.org/10.3390/su7044199>

552 Hunt, R., Warren Wilson, J., Hand, D.W., Sweeney, D. G., 1984. Integrated Analysis of Growth and Light  
 553 Interception in Winter Lettuce I. Analytical Methods and Environmental Influences. Ann Bot 54, 743–757.  
 554 <https://doi.org/10.1093/oxfordjournals.aob.a086847>  
 555

556 Hyland, W., Wexler, A., 1983. Formulations for the thermodynamic properties of dry air from 173.15 K to  
 557 473.15 K, and of saturated moist air from 173.15 K to 372.15 K, at pressures to 5 MPa. ASHRAE Trans.  
 558 89, 520–535.

559 Johnson, G.E., Buzby, K.M., Semmens, K.J., Holaskova, I., Waterland, N.L., 2017. Evaluation of Lettuce  
 560 Between Spring Water, Hydroponic, and Flow-through Aquaponic Systems. Int. J. Veg. Sci. 23, 456–470.  
 561 <https://doi.org/10.1080/19315260.2017.1319888>

562 M’Hamdi, M., Boughattas, I., Chikh Rouhou, H., Souhli, E., Bettaieb, T., 2014. Effect of different levels of  
 563 nitrogen fertilizer on morphological and physiological parameters and nitrates accumulation of lettuce  
 564 cultivars (*Lactuca sativa* L.). Res Plant Biol 4(4), 27-38.

565 Mahlangu, R.I.S., Maboko, M.M., Sivakumar, D., Soundy, P., Jifon, J., 2016. Lettuce (*Lactuca sativa* L.)  
 566 growth, yield and quality response to nitrogen fertilization in a non-circulating hydroponic system. J. Plant  
 567 Nutr. 39, 1766–1775. <https://doi.org/10.1080/01904167.2016.1187739>

568 Mallick, F.R., Rahman, M.F., 2005. Proceedings of the International Conference & Exhibition on Soilless  
 569 Culture: ICESC-2005: Fort Canning Gallery, Singapore: September 5-8, 2005, in: *Acta Horticulturae*.  
 570 ISHS.

571 Martins, C.I.M., Eding, E.H., Verdegem, M.C.J., Schneider, O., Heinsbroek, L.T.N., Blancheton, J.P.,  
 572 D'Orbcastel, E.R., Verreth, J.A.J., 2010. New developments in recirculating aquaculture systems in Europe:  
 573 A perspective on environmental sustainability. *Aquac. Eng.* 43, 83–93.  
 574 <https://doi.org/10.1016/j.aquaeng.2010.09.002>

575 Nozzi, V., Graber, A., Schmutz, Z., Mathis, A., Junge, R., 2018. Nutrient Management in Aquaponics:  
 576 Comparison of Three Approaches for Cultivating Lettuce, Mint and Mushroom Herb. *Agronomy* 8, 27.  
 577 <https://doi.org/10.3390/agronomy8030027>

578 Pantanella, E., Cardarelli, M., Colla, G., Rea, E., Marcucci, A., 2012. Aquaponics vs. Hydroponics: Production  
 579 and Quality of Lettuce Crop. *Acta Hortic.* 927, 887–894.  
 580 <https://doi.org/10.17660/ActaHortic.2012.927.109>

581 Pignata, G., Casale, M., Nicola, S., 2017. Water and nutrient supply in horticultural crops grown in soilless  
 582 culture; resource efficiency in dynamic and intensive systems, in: Tei F., Nicola S., Benincasa P. (Eds.),  
 583 *Advances in Research on Fertilization Management of Vegetable Crops*. Springer, Cham, Berlin, Germany,  
 584 pp. 183–219  
 585

586 Qiansheng, L., Xiaoqiang, L., Bin, T., Mengmeng G., 2018. Growth Responses and Root Characteristics of  
 587 Lettuce Grown in Aeroponics, Hydroponics, and Substrate Culture. *Horticulturae* 4, 35.  
 588 <https://doi:10.3390/horticulturae4040035>

589 Rakocy, J., Bailey, D., Shultz, R., Danaher, J., 2007. Preliminary Evaluation of Organic Waste from Two  
 590 Aquaculture Systems as a Source of Inorganic Nutrients for Hydroponics. *Acta Hortic.* 742, 201–207.  
 591 <https://doi.org/10.1002/9783527693535.ch14>

592 Rakocy, J.E., Masser, M.P., Losordo, T.M., 2006. Recirculating Aquaculture Tank Production Systems :  
 593 *Aquaponics — Integrating Fish and Plant Culture*. SRAC Publ. 454.

594 Savvas, D., Passam, H.C., Olympios, C., Nasi, E., Moustaka, E., Mantzos, N., Barouchas, P., 2006. Effects of  
 595 Ammonium Nitrogen on Lettuce Grown on Pumice in a Closed Hydroponic System. HortSci, 41(7), 1667-  
 596 1673. <https://doi.org/10.21273/HORTSCI.41.7.1667>

597 Scuderi, D., Giuffrida, F., Noto, G., 2009. Effects of Nutrient Solution EC on Yield, Quality and Shelf-Life of  
 598 Lettuce Grown in Floating System. Acta Hortic. 807, 221–226.  
 599 <https://doi.org/10.17660/ActaHortic.2009.807.77>

600 Shaban N.T., Tzvetkova N., Cherkez R., Parvanova P., 2016. Evaluation of response of lettuce (*Lactuca sativa*  
 601 *L.*) to temperature and light stress. Acta Agrobot. 69, 1 – 9. <http://dx.doi.org/10.5586/aa.1664>

602 Shi, L., Wang, Y., Zhang, L., Wang, P., Desalination, W., 2017. (Supporting information for) Rational design  
 603 of a bi-layered reduced graphene oxide film on polystyrene foam for solar-driven interfacial water  
 604 evaporation. J. Mater. Chem. 5, 16212–16219.

605 Smith, B.J., Phillips, G.M., Sweeney, M., 2014. Environmental Science, 1st Edition

606 Stefanelli, D., Winkler, S., Jones, R., 2011. Reduced nitrogen availability during growth improves quality in  
 607 red oak lettuce leaves by minimizing nitrate content, and increasing antioxidant capacity and leaf mineral  
 608 content. Agric. Sci. 02, 477–486. <https://doi.org/10.4236/as.2011.24061>

609 Timmons, M., Ebeling, J., 2007. Recirculating aquaculture, Cayuga Aqua Ventures LLC. Itaca, NY, USA. 948  
 610 pp.

611 Trejo-Téllez I.L., Gómez-Merino, F.C., 2012. Nutrient Solutions for Hydroponic Systems, in: Asao, T., (Ed),  
 612 Hydroponics - A Standard Methodology for Plant Biological Researches. InTech, Rijeka, Croatia, pp. 1-  
 613 22, <https://doi:10.5772/37578>

614 Tzortzakis, N.G., 2009. Alleviation of salinity-induced stress in lettuce growth by potassium sulphate using  
 615 nutrient film technique. Int. J. Veg. Sci. 15, 226–239. <https://doi.org/10.1080/19315260902751320>

616 Ünlükara, A., Cemek, B., Karaman, S., Erşahin, S., 2008. Response of lettuce (*Lactuca sativa* var. Crispa) to  
 617 salinity of irrigation water. New Zeal. J. Crop Hortic. Sci. 36, 265–273.  
 618 <https://doi.org/10.1080/01140670809510243>

619 Verdegem, M., Bosma, R., Verreth, J., 2006. Reducing Water Use for Animal Production Through  
 620 Aquaculture. *Journal, Int. Dev. Water Resour.* 22, 101–113. <https://doi.org/10.1080/07900620500405544>

621 Wada, Y., Flörke, M., Hanasaki, N., Eisner, S., Fischer, G., Tramberend, S., Satoh, Y., Van Vliet, M.T.H.,  
 622 Yillia, P., Ringler, C., Burek, P., Wiberg, D., 2016. Modeling global water use for the 21st century: The  
 623 Water Futures and Solutions (WFaS) initiative and its approaches. *Geosci. Model Dev.* 9, 175–222.  
 624 <https://doi.org/10.5194/gmd-9-175-2016>

625 Wielgosz, Z.J., Anderson, T.S., Timmons, M.B., 2017. Microbial Effects on the Production of Aquaponically  
 626 Grown Lettuce. *Horticulturae* 3, 46. <https://doi.org/10.3390/horticulturae3030046>

627 Zhang, J., Ren, W., An, P., Pan, Z., Wang, L., Dong, Z., He, D., Yang, J., Pan, S., Tian, H., 2015. Responses  
 628 of Crop Water Use Efficiency to Climate Change and Agronomic Measures in the Semiarid Area of  
 629 Northern China. *PLoS One* 10, e0137409. [https://doi: 10.1371/journal.pone.0137409](https://doi:10.1371/journal.pone.0137409)

630 Żmijewski, T., Kowalska, A., Jankowska, B., Ulikowski, D., Zakęś, Z., Zak, Z., Żmijewski, T., Ulikowski, D.,  
 631 Kowalska, A., 2006. Slaughter value and flesh characteristics of European catfish (*Silurus glanis*) fed  
 632 natural and formulated feed under different rearing conditions. *Eur. Food Res. Technol.* 224, 453–459.  
 633 <https://doi.org/10.1007/s00217-006-0349-2>

634

635