

Alma Mater Studiorum Università di Bologna  
Archivio istituzionale della ricerca

Shaking table testing of groin vaults made by 3D printers

This is the final peer-reviewed author's accepted manuscript (postprint) of the following publication:

*Published Version:*

Silvestri S., Baraccani S., Foti D., Ivorra S., Theodossopoulos D., Vacca V., et al. (2021). Shaking table testing of groin vaults made by 3D printers. SOIL DYNAMICS AND EARTHQUAKE ENGINEERING, 150, 1-18 [10.1016/j.soildyn.2021.106880].

*Availability:*

This version is available at: <https://hdl.handle.net/11585/858980> since: 2022-02-15

*Published:*

DOI: <http://doi.org/10.1016/j.soildyn.2021.106880>

*Terms of use:*

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).  
When citing, please refer to the published version.

(Article begins on next page)

This is the final peer-reviewed accepted manuscript of:

**Stefano Silvestri, Simonetta Baraccani, Dora Foti, Salvador Ivorra, Dimitris Theodossopoulos, Vitantonio Vacca, Jacqueline Ochoa Roman, Luca Cavallini, Elnaz Mokhtari, Rory White, Matt Dietz, George Mylonakis, Shaking table testing of groin vaults made by 3D printers, Soil Dynamics and Earthquake Engineering, Volume 150, 2021, 106880, ISSN 0267-7261.**

The final published version is available online at:

<https://doi.org/10.1016/j.soildyn.2021.106880>

#### Terms of use:

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

*This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>)*

***When citing, please refer to the published version.***

# Shaking Table Testing of Groin Vaults made by 3D Printers

Stefano Silvestri<sup>1</sup>, Simonetta Baraccani<sup>1\*</sup>, Dora Foti<sup>2</sup>, Salvador Ivorra<sup>3</sup>, Dimitris Theodossopoulos<sup>4</sup>, Vitantonio Vacca<sup>2</sup>, Jacqueline Ochoa Roman<sup>1</sup>, Luca Cavallini<sup>1</sup>, Elnaz Mokhtari<sup>1</sup>, Rory White<sup>5</sup>, Matt Dietz<sup>5</sup>, George Mylonakis<sup>5,6,7</sup>

<sup>1</sup>*Department of Civil, Chemical, Environmental and Materials Engineering, University of Bologna, Bologna, Italy*

<sup>2</sup>*Department of Civil Engineering Sciences and Architecture, Technical University of Bari, Bari, Italy*

<sup>3</sup>*Department of Civil Engineering, University of Alicante, Alicante, Spain*

<sup>4</sup>*Edinburgh School of Architecture and Landscape Architecture, University of Edinburgh, Edinburgh, United Kingdom, UK*

<sup>5</sup>*Department of Civil Engineering, University of Bristol, Bristol, United Kingdom*

<sup>6</sup>*Department of Civil Infrastructure & Environmental Engineering, Khalifa University, U.A.E.*

<sup>7</sup>*Department of Civil & Environmental Engineering, University of California at Los Angeles (UCLA), U.S.A.*

*\*corresponding author*

## Abstract

A novel experimental study of the seismic response of a 2 m x 2 m in plan - 0.7 m in height groin vault model, involving 266 tests conducted on the shaking table of EQUALS laboratory, University of Bristol, UK, is reported. The experimental rig consists of blocks formed by a 3D-printed plastic skin to provide stiffness and strength, filled with mortar. Dry joints between the voussoirs are formed for ease of testing and vault reconstruction. No investigations of this kind and size have been attempted in the past. Two support boundary conditions involving four lateral confinement modes, leading to various vault configurations, were tested. White-noise, sinusoidal and earthquake motions were imposed in one horizontal direction, with progressively increasing amplitude and different frequencies, up to collapse. The model exhibited a strongly non-linear behaviour, with decreasing fundamental frequency and increasing damping with increasing table acceleration. Failure mechanisms and collapse accelerations were found to mainly depend on base restraint conditions.

## Keywords

Groin vault; 3D printer; Shaking table; Frequency; Damping; Collapse; Moveable springings

34

## 35 **1 Introduction**

36 Several types of historical masonry buildings are prone to earthquake damage, due to the presence of  
37 vulnerable elements such as vaulted roofing, irregular structural configurations (both in plan and  
38 elevation) and progressive structural weakening caused by aging and successive seismic events.  
39 The analysis of damage in historical masonry churches has revealed different collapse mechanisms;  
40 associated with the local response of specific structural elements. In particular, observations  
41 following strong earthquakes suggest that out of all structural elements in this type of construction,  
42 the most vulnerable are masonry vaults [1], [2], [3]. Knowledge of the dynamic behaviour of these  
43 structures is fundamental for relevant analyses and effective interventions. However, the evaluation  
44 of seismic response of such systems is complex and depends on several factors including three-  
45 dimensional geometry, mechanical properties of the constituent materials, behaviour of the  
46 supporting elements (e.g., lateral walls and piers, buttresses) and joint construction quality.  
47 Several studies are available in the literature on structural behaviour of masonry vaults. The use of  
48 limit analysis, introduced by Baker and Symonds and Neal for steel frames in the late 1940's and  
49 early 1950's [4], [5], [6] and later extended by Heyman for masonry structures [7], [8], [9], provides  
50 fundamental insight into static/pseudo-static behaviour and the associated stability limits. Many  
51 experimental studies have investigated the structural behaviour of arches and vaults under horizontal  
52 actions, focusing particularly on dynamic response [10], [11], [12]. Other studies focused on  
53 displacement-controlled tests by applying widening and shortening displacements at the springings,  
54 mainly under static [13], [14], [15] or pseudo-static [16], [17], [18], [19] conditions, to explore the  
55 importance of the response of the supporting elements. In addition, computational methods such as  
56 the Finite Element Method (FEM) and Discrete Element Method (DEM) [20], [21], [22] have  
57 expanded our understanding of the behaviour of the particular structural type and geometry, but still  
58 without a satisfactory application in real problems. DEM, in particular, offers the possibility of  
59 modelling the interfaces and including the visible discontinuities when bricks separate, by simulating  
60 the structure as an assembly of distinct units (blocks). Nevertheless, it is fundamental to determine  
61 the relevant mechanical parameters to successfully model masonry. Despite the availability of a large  
62 volume of recent studies on the dynamic and seismic behaviour of arches [23], [24], [25] and of barrel  
63 and cross vaults [17], [22], [26], [27], [28], [29], experimental research is still needed the mechanics  
64 of groin pointed vaults.

This paper reports on a set of preliminary results from a shaking table campaign on a scaled model of a groin pointed vault, conducted at the Earthquake and Large Structures (EQUALS) Laboratory, University of Bristol, UK, under the auspices of a H2020 SERA project (SEBESMOVA3D) [30]. A 2m x 2m in-plan, 0.7 m tall vault model encompassing dry joints (i.e. unilateral joints with an interposed elastic gum layer) between the voussoirs, like many monumental structures in the Mediterranean, was built in an innovative way, with blocks made of a 3D-printed plastic material. The skin was filled with mortar to provide inertia and allow quick repetition of tests, carried out until collapse. This technique was used in earlier similar tests conducted on a small barrel vault at the “Laboratorio Salvati”, Technical University of Bari, Italy [31], where modular blocks made of wood and stone with dry joints were employed to form innovative arches [32], [33]. A similar technique was adopted by Quinonez and co-workers [34] for a small-scale experimental investigation of collapse due to outward support displacements on two model domes (thickness of 17.3 mm and 32.8 mm, respectively) created from individual printed blocks. Further, Van Mele and co-workers [22] studied the collapse of a small-scale 3D-printed groin vault model (span of 150 mm and thickness of about 24.4 mm) under large support displacements. Shapiro et al. [12] used the 3D-printing technique to perform tests considering pseudo-static horizontal accelerations realised through tilting of the base of a groin vault composed of two barrel vaults (318 mm deep, 24 mm thick) and an angle of embrace of 110°. More recently, Rossi et al. [29] performed pseudo-static tests on a cross vault scaled model built by 3D printed plastic blocks with dry joints (span of 0.620 m, rise of 0.225 m, thickness 0.024 m). To the best of the authors’ knowledge, no investigations on groin pointed vaults of the size at hand (2m x 2m in plan) have been carried out in the past.

The main objectives of the SEBESMOVA3D project were to assess the dynamic behaviour and evaluate the crack patterns and collapse mechanisms of groin vaults with different base boundary conditions, namely Configuration 1 in which the vault model rests on four fixed supports, and Configuration 2 where the vault model rests on two fixed springings combined with two one-directional moving supports characterised by very low lateral stiffness. The rationale behind this choice lies in the observation that a vault under earthquake excitation is mainly subjected to two distinct phenomena [19]: (i) dynamic response of the structure without relative support movements which can be modelled by Configuration 1, and (ii) response of the vault to differential horizontal (“in-plane shear”) displacements imposed at its springings through the non-uniform response of underlying structures such as walls and piers, characterised by different lateral stiffness, which can be modelled by Configuration 2. Four different conditions were considered along the four lateral edges to account for different confinement levels: wooden panels, Plexiglas panels (cut and uncut) and no panels.

99 The aim of this paper is to: (1) outline the main features of the novel specimen design and the cutting-  
100 edge experimental setup (e.g. high definition motion capture equipment), and (2) elucidate the main  
101 findings of the experimental campaign with emphasis on the effect of different boundary conditions  
102 both at the base of the vault and laterally. The generic vault model employed in the study is  
103 representative of masonry and stone cross vault structures which are common in the Mediterranean  
104 region. A detailed interpretation/simulation of the test results and extrapolation to real vaults is  
105 beyond the scope of the present manuscript and will be the subject of a companion paper.

106


## 107 **2 The vault model**

108 To investigate the structural response of masonry groin pointed vaults, a scaled model was built to  
109 realistically simulate the geometry, mass distribution, and interface behaviour of this type of  
110 structures. As no specific prototype structure was targeted, a generic configuration based on typical  
111 proportions and a circular profile for the intersecting barrels were adopted. The diagonal intersections  
112 were also semi-circles for ease of construction, resulting in inclined vertices. It should be noted that  
113 considering ribs with the vault would have added further complexity both in construction and the  
114 dynamics of the model, so they were avoided in this study. The model was designed as an assembly  
115 of distinct plastic-mortar blocks. A plastic mould formed each block, made by a 3D printer at the  
116 Bitonto FabLab (Italy), which was then filled with mortar to acquire the necessary mass for dynamic  
117 tests. Gum layers were laid at the interfaces to control the adequate friction between the blocks. The  
118 shape and dimensions of the blocks were carefully designed through stereotomy studies of real stone  
119 and masonry vaults [35], [36]. In this way, every block was designed to play an essential part in the  
120 stability and static equilibrium of the vault.


121 Studying damage of historic buildings in seismic events reveals that failure of vaults does not initiate  
122 at their springings, but at the key-stone zone which is essentially embedded into support elements to  
123 counteract the outward thrust [37], [38], [39]. Examples are displayed in Figure 1. This is a key  
124 element to be considered when attempting to understand and predict the response of masonry vaults  
125 to seismic action. For this reason, the model was truncated at the base to take into account the effect  
126 of embedment in the perimeter walls and stiff springings (Figure 2).

127 The global dimensions of the vault were adjusted to fit the capacity of table at EQUALS laboratory  
128 at the University of Bristol, leading to a physical model occupying a 2m x 2m area and standing at a  
129 height of 0.71m. (This model may correspond roughly to a scaling factor of 5 relative to a hypothetical  
130 10 m x 10 m prototype with a rise of 3.5 m. Nevertheless, other scaling factors are possible [46]). The  
131 vault consists of 172 blocks, five of which have larger dimensions than the others. These are the four


132 bases on which the structure is set up, Figure 3a, and the keystone, Figure 3b, which locks all the  
 133 pieces into position. The average dimensions of a typical block are 12 cm x 8 cm x 20 cm, Figure 3c.  
 134

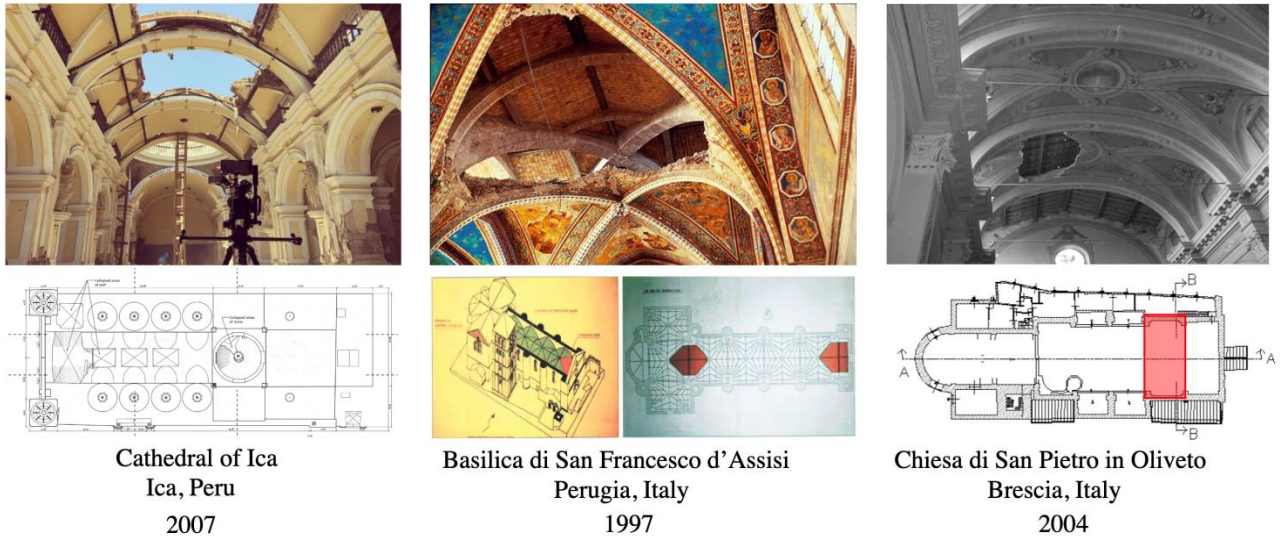

135  
 136 **Figure 1:** Examples of vault collapses in historical churches [37], [38], [39].  
 137

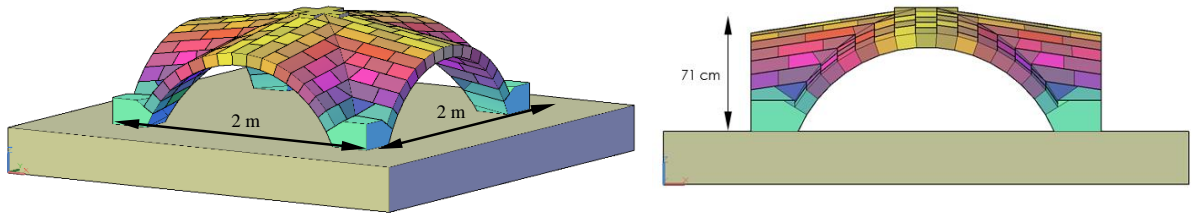

138  
 139 **Figure 2:** The vault model.  
 140

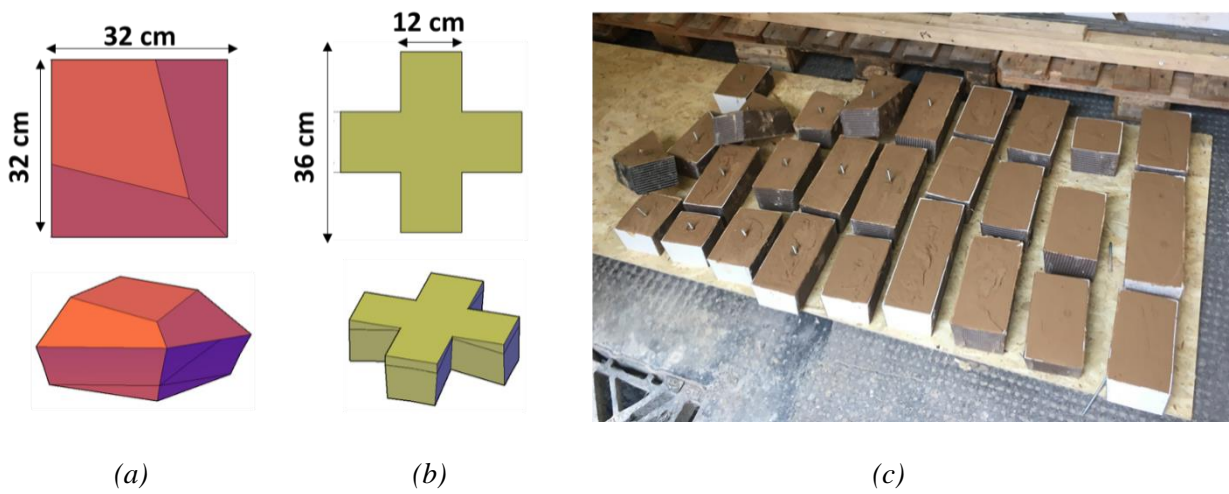

141  
 142 **Figure 3:** (a) Base block. (b) Keystone block. (c) Typical blocks.  
 143  
 144  
 145



### 3 Material properties


The composite blocks of the vault are fastened to each other with a thin layer of gum to increase the frictional and dissipative properties of the interfaces, and allow for small adjustments to be made during construction, since no fresh mortar exists between the bricks. The internal friction angle of the gum-enhanced interface between adjacent blocks was experimentally evaluated at about  $30^\circ$ .

The 3D printed blocks were made of polylactic acid (PLA) which is a completely compostable and biodegradable polymer obtained from the processing of plants rich in dextrose. The printing resolution in terms of layer height was 0.3 mm. The blocks are hollow with a thickness of plastic casing of about 2.5 to 3 mm.

The filling material of the blocks is “thistle bonding coat” made of British Gypsum. Mass density of the infill mortar was around  $1.2 \text{ Mg/m}^3$ . To assess the mechanical properties of the filling material, a compression test of a cubic sample was carried out, as shown in Figure 4. The elastic modulus (E) and compressive strength were estimated at 60 MPa and 250 kPa, respectively (a ratio of 240). Likewise, the mechanical properties of the mortar-skin-gum set were assessed via cyclic compressive tests of a chain of three bricks filled with mortar and a gum-layer around, Figure 5. The initial part of the first cycle of loading provides information about the elastic modulus of the gum ( $E = 0.8 - 1 \text{ MPa}$ ), as this is the first element of the mortar-skin-gum set that gets compressed. The subsequent part of the first loading cycle returns an elastic modulus of 40 MPa for the three bricks, which is mostly provided by the stiffness of the plastic box. At higher forces, mortar starts to engage as it is confined by the plastic box ( $E = 200 \text{ MPa}$ ).



(a)

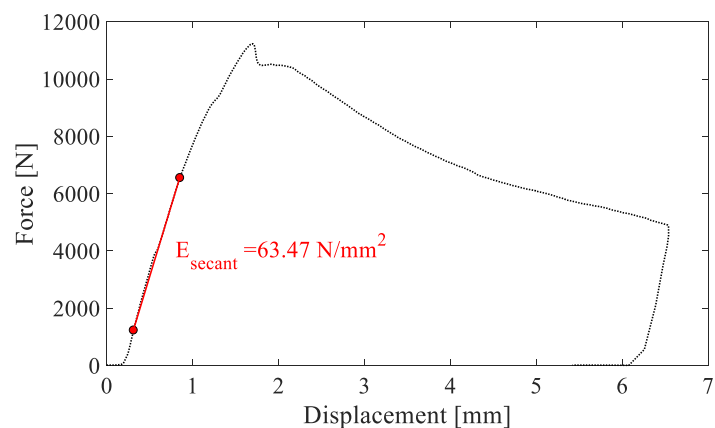


(b)

**Figure 4:** (a) Setup of the compression test of a mortar cubic sample. (b) Force-displacement diagram.





(a)

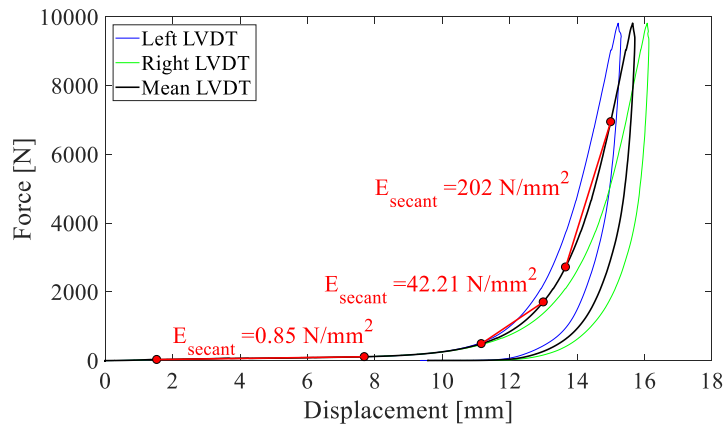

(b)

**Figure 5:** Cyclic compression tests of a chain of three bricks filled with mortar and bonded with a gum-layer: (a) setup of the tests, (b) elastic modulus of the gum layer, the plastic skin, the block (plastic skin and mortar).

## 4 Construction phases


The plastic brick moulds were pre-assembled to verify dimensions, shapes and number of units, as shown in Figure 6. The vault was then dismounted to fill up the units with mortar. The vault was placed on four 2-cm thick steel corner plates designed to counteract the thrust at the springings and set the desired base boundary conditions. This is discussed in the following section.

The assembly process for each configuration was kept the same in the interest of repeatability of construction. The base blocks were first positioned on the steel plates, followed by blocks placed on the polystyrene formwork starting from the lateral arches. After each row of blocks was installed for all lateral arches, the diagonal blocks were installed followed by the remaining block of webs (Figure 7).

The total weight of the groin vault model filled with mortar was about 4.69 kN. The weight of each steel corner plate was around 0.9 kN, leading to an overall model weight of 8.3 kN.



*Figure 6: Pre-assembly of the plastic skin of the blocks.*

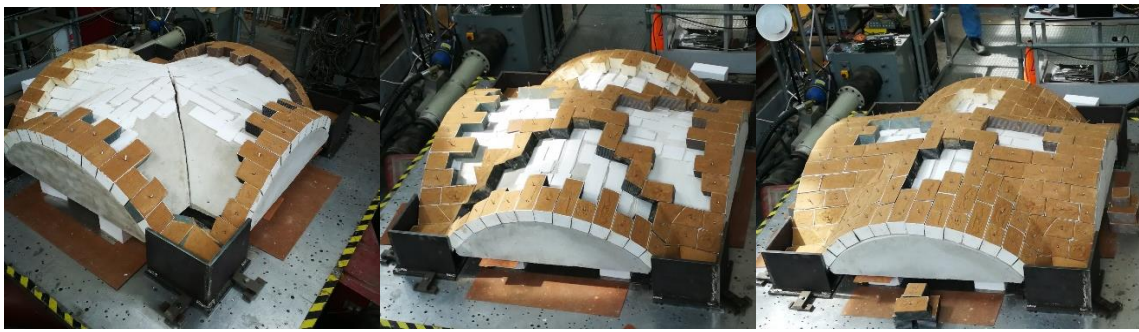

*Figure 7: Assembly process.*


## 5 Testing configurations

Various configurations were tested depending on two different base boundary conditions and four types of lateral confinement (Figure 8).


The two base boundary conditions considered are:

1. Fixed: the vault was placed on four steel plates fixed on the shaking table (Figure 8a).
2. Moveable: the vault was placed on two fixed steel plates and on two moveable carriages on bearings running in the Y direction along a pair of 40mm-diameter rails regulated by horizontal springs to provide a combined stiffness of 16 kN/m (Figure 8b).


The stiffness of the horizontal springs was designed to obtain an “in-plane shear” displacement roughly equal to 3% of the longitudinal arch span [19] (i.e. 60 mm) under a Peak Table Acceleration (PTA) of around 0.25 g, considering no amplification and half mass of the vault effectively acting on the springs. As discussed earlier, the configurations of fixed based and moveable springings will be referred in the following to as Configurations 1 and 2, respectively.

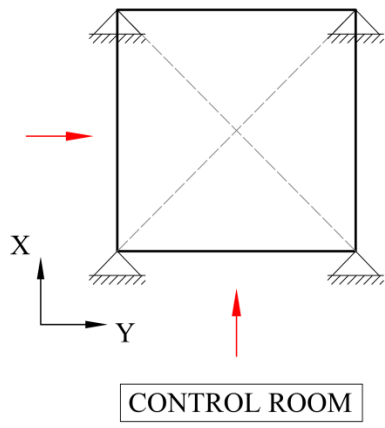

(a)

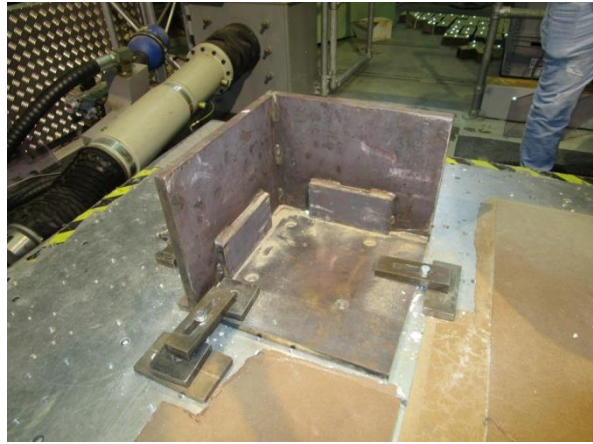

(b)

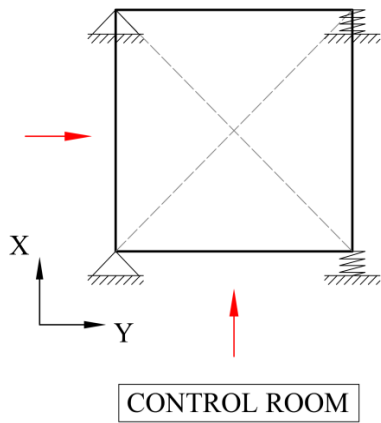

(c)



(d)

**Figure 8:** (a) Scheme of Configuration 1: fixed. (b) Steel plates firmly clamped to the table to realise the fixed restraints. (c) Scheme of Configuration 2: moveable. (d) Steel plates mounted on a moveable carriage running on bearings controlled by horizontal springs to realise two flexible springings.

Different lateral confinement types were provided along the lateral arches. Specifically:

- A. Four 2 cm-thick wooden panels (elastic modulus about 7 GPa, Figure 9a).
- B. Four 2 cm-thick Plexiglas panels (elastic modulus about 3 GPa, Figure 9b).
- C. Four 2 cm-thick Plexiglas panels, with two of them (the ones along the Y-direction, normal to the direction of movement allowed by the carriages) cut in the middle (Figure 9c).
- D. No panels but only spandrel confinement (Figure 9d).

Table 1 summarises the configurations tested, the nomenclature used to refer to each of these and the identification number of the corresponding tests.






(a)



(b)

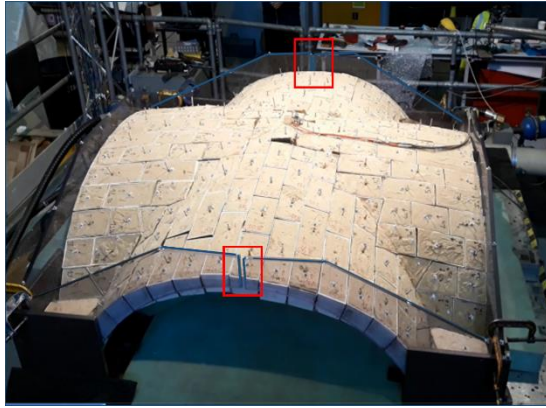

(c)



(d)


**Figure 9:** Different lateral confinements along the lateral arches: (a) four 2 cm-thick wooden panels, (b) four 2cm-thick Plexiglas panels, (c) four 2cm-thick Plexiglas panels, with two of them cut at the crown, (d) no panels.

**Table 1:** The configurations that were tested.

Configurations	Base boundary condition	Lateral Confinement	Tests carried out
1A	1: fixed	A: Wooden panels	1-72
1B	1: fixed	B: Plexiglas panels	73-145,147, 176, 196, 200
1C	1: fixed	C: Cut Plexiglas panels	205,207, 209,211,213
1D	1: fixed	D: No panels	237,239,241,243,245,247,249,251,253,255,257, 259
2A	2: moveable	A: Wooden panels	Not tested
2B	2: moveable	B: Plexiglas panels	146, 148-175, 177-195, 197-199, 201-203
2C	2: moveable	C: Cut Plexiglas panels	204, 206,208,210,212, 214-236
2D	2: moveable	D: No panels	238,240,242,244, 246, 248,250, 252, 254, 256,258, 260-266

## 6 Testing instrumentation

The nomenclature of the webs and ribs is reported in Figure 10a. The testing instrumentation consists of: (a) two triaxial Setra accelerometers situated on the shaking table and the keystone of the vault, sampling at a rate of 5000 Hz (Figure 10b); (b) a vision system consisting of motion-capture cameras recording the positions at a rate of 100 Hz, of reflective markers positioned on each block for individual block tracking, on the panels and on the shaking table (Figure 10c); (c) a data acquisition system encompassing a 250-channel system and an advanced wireless system of 8 high-definition digital cameras.

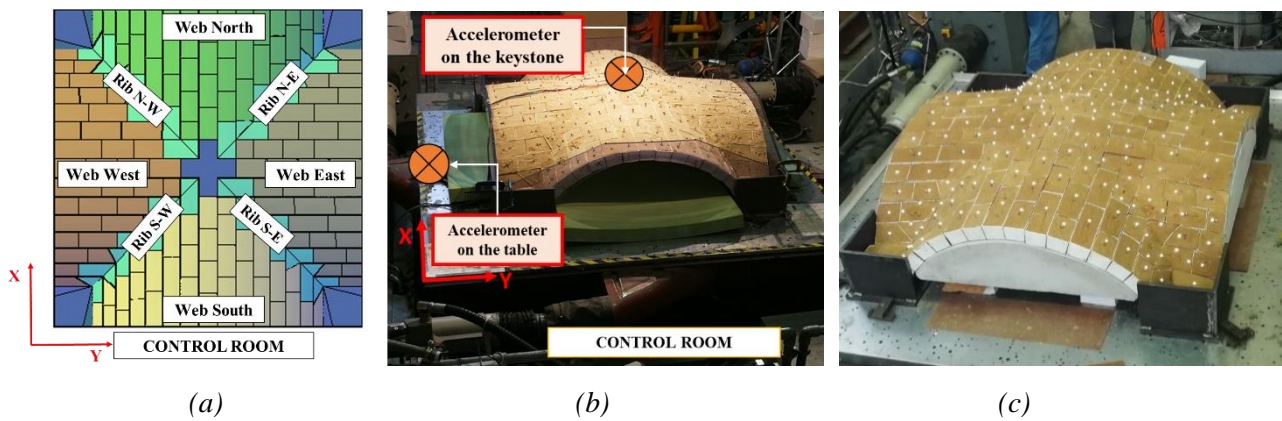

**Figure 10:** (a) Reference system. (b) Position of the triaxial Setra accelerometers. (c) Position of the reflective markers.

## 7 Testing programme

During the experimental campaign, 266 tests were carried out on two separate sessions, August 2019 and January/February 2020. The whole set of tests is listed on Table A1 in the Appendix. Considering that the restraining (stabilising) action is associated with self-weight and the driving (destabilising) action is associated with inertia, Housner's rocking model [40] suggests that the time scale should be equal to the square root of the geometric scaling factor, i.e.  $\lambda_{time} = (\lambda_{geometry})^{1/2}$ . For a geometric scaling factor of approximately 5 to 10 (in agreement with scaling factors available in the literature for models of similar size [46]), this implies that dynamic time is scaled by a factor of roughly 2 to 3. It should be kept in mind, however, that the modelling is distorted relative to a real vault, since stress similitude is not preserved (e.g. the elastic moduli of the materials are not faithfully scaled). This violation, however, is of minor importance for the purposes of the experiments at hand, as the sliding/rocking behaviour of the structure prevails near failure and is not affected by elastic behaviour [41].

263 In the first session, tests 1 to 63 were conducted in three stages: each of them was realised in a series  
264 of consecutive tests with reconstruction only after collapse, meaning that each test accumulated the  
265 damage (block dislocations) of the preceding ones. In this session, the vault was resting on four fixed  
266 supports with four 2 cm-thick wooden panels mounted along the lateral arches (Configuration 1A).  
267 Sinusoidal tests of constant excitation amplitude with varying frequencies between 1 Hz and 50 Hz  
268 were performed, with special emphasis in the frequency range 2 – 15 Hz, where the effects of  
269 resonance were significant and most of the damage took place. Additionally, six seismic tests were  
270 performed by applying real recorded motions from the Emilia 2012 earthquake (Modena and  
271 Mirandola stations) and El Centro 1940 NS. At the beginning of each stage, white noise tests with an  
272 approximate Root Mean Square (RMS) table acceleration of 0.05 g, were applied to obtain the  
273 dynamic properties of physical model. This was important to ensure that the model was rebuilt with  
274 the same configuration, exhibiting more or less the same frequency response, leading to repeatable  
275 tests. During this session, the vault collapsed three times: two at an excitation of 2 Hz with a Peak  
276 Table Acceleration (PTA) of 1 g (tests #31 and #52), and one at 5 Hz with a PTA of 1.4 g (test #63).  
277 In the second session, all configurations were tested through a series of random tests of gradually  
278 increasing acceleration:

- 279 • RMS acceleration range 0.02 g – 0.60 g for Configuration 1A (tests #64 to #72);
- 280 • RMS acceleration range 0.03 g – 0.22 g for Configuration 1B (tests #73 to #78);
- 281 • RMS acceleration range 0.04 g – 0.20 g for Configuration 2B (tests #146 and #148 to #151),  
282 for Configurations 1C and 2C (tests #204 to #213) and for Configurations 1D and 2D (tests  
283 #237 to #244).

284 To this end, suites of sinusoidal tests involving 10 excitation cycles of constant amplitude and  
285 decreasing frequency (from 50 Hz to 1 Hz), were carried out on Configurations 1B, 2B and 2C, in a  
286 similar fashion to the first session. Moreover, for Configurations 1B, 2B, 1D and 2D, sinusoidal tests  
287 were performed focusing on low-frequencies (1–2–3–5 Hz). In general, collapse was reached, via  
288 damage accumulation, after a considerable number of successive tests. An exception was tests #142  
289 and #143 in which the collapse input motion of the preceding test was applied right upon  
290 reconstruction of the model, to investigate the importance of damage accumulation.

291 Long sinusoidal input (500 cycles) of constant amplitudes (0.2 g – 0.3 g) and low frequencies  
292 (3–2.5–2 Hz) were applied during tests #197-198 and #201-203, to investigate possible low-cycle  
293 fatigue phenomena. It was observed that 1000 cycles at 3 Hz, as well as 1000 cycles at 2.5 Hz were  
294 not sufficient to induce full collapse. Collapse occurred when the input frequency was lowered again


295 to 2 Hz, highlighting the strong dependence of collapse on excitation frequency than duration, for  
296 lower acceleration levels (around 0.2 g).  
297 For Configuration 1B, three collapses were recorded: one at 5 Hz with PTA = 0.75 g (test #118) and  
298 two at 3 Hz with PTA = 1 g (test #139 and #143). Also, in Configuration 2B, the vault collapsed three  
299 times: at 2 Hz with PTA = 0.25 g (test #174) and 0.2 g (test #203) and at 3 Hz with PTA = 1 g (test  
300 #194, partial collapses started at 0.5 g). For Configurations 2C and 2D, only one collapse was  
301 recorded: at 2 Hz with PTA = 0.25 g (test #236) and at 3 Hz with PTA = 0.4 g (test #266), respectively.  
302

## 303 **8 Results of white noise tests: dynamic properties**

304 White noise tests were systematically carried out in each model configuration for dynamic  
305 identification purposes, including amplitude dependent effects. Noiseless frequency response  
306 functions were obtained from the white-noise response data using the curve-fitting algorithm of an  
307 Advantest R9211B FFT servo analyser configured to compute the poles and zeros of the complex  
308 functions in the Laplace domain. Damping coefficients and resonant frequencies at the peaks of the  
309 fitted frequency response function waveforms were then obtained from the real and imaginary parts  
310 of the computed poles.

311 As already mentioned, the vault was tested repeatedly up to collapse and then rebuilt; after each  
312 reconstruction, low-amplitude (0.03 – 0.05 g) white noise tests were conducted to check whether the  
313 model was rebuilt to the same configuration and possessed the same dynamic properties. For a given  
314 configuration, they highlighted the substantial equivalence/repeatability of the tests in terms of  
315 fundamental frequency and damping ratio, of each reconstruction with respect to the preceding one.  
316 Figure 11 displays the fundamental frequency of the vault as a function of the RMS table acceleration  
317 for all the investigated configurations. In all cases, the plots suggest that the fundamental frequency  
318 is amplitude-dependent, indicating a decrease with increasing acceleration. Also, as expected due to  
319 a reduction in stiffness, Configuration 2 (two moveable springs) is characterised by significantly  
320 reduced frequencies. Finally, the vaults without panels are more flexible, providing frequency values  
321 roughly equal to half of those of the corresponding confined vaults. This strong non-linear dynamic  
322 behaviour of the model could be explained in light of detachments between the bricks in many places  
323 during high amplitude shaking, leading to an "equivalent/effective" Young's modulus of the vault  
324 which continuously changed in time and space.



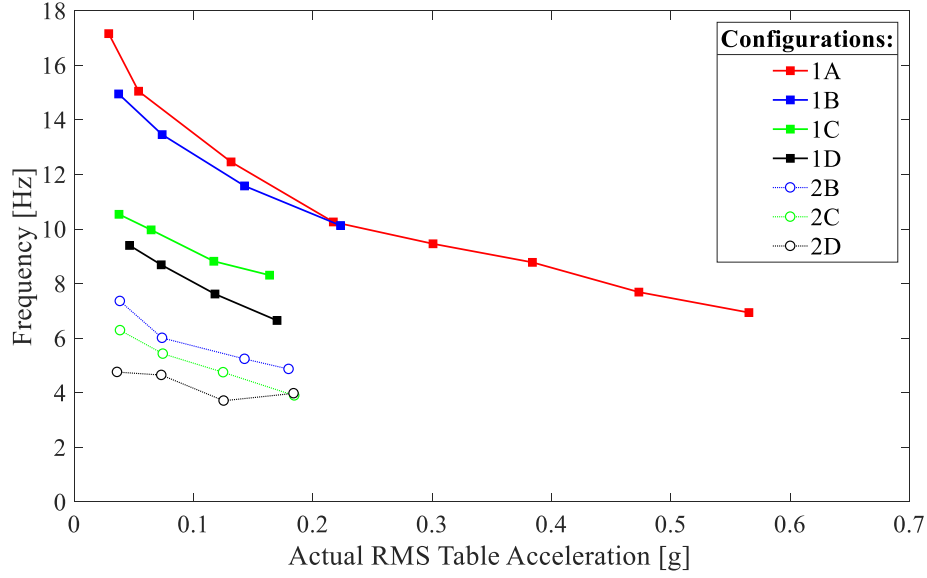

**Figure 11:** Fundamental frequency as a function of acceleration for all investigated configurations.

Regarding the Percentage of Fixed Connection (*PFC*) provided by the flexible supports, according to elementary mechanics & soil-structure interaction theory [47], the combined stiffness of two translational linear springs  $k_s$  (representing the stiffness of the structure) and  $k_b$  (representing the stiffness of the base spring) attached in a series is  $k = k_s k_b / (k_s + k_b)$ . The corresponding natural frequency is  $f = (k/m)^{1/2}$ ,  $m$  being the engaged inertial mass. Considering the natural frequency of the structure on fixed supports  $f_s = (k_s/m)^{1/2}$  and assuming that the inertial mass is the same between the two configurations, yields  $(f/f_s)^2 = 1/(1 + k_s/k_b)$ . Evidently, if  $k_b$  gets infinitely large, the frequency ratio  $(f/f_s)$  on the left hand side will tend to 1. This condition will be called 100% of a fixed connection. Conversely, if  $k_b$  tends to zero, the frequency ratio  $(f/f_s)$  will tend to zero as well, which will be called 0% of a fixed connection. Accordingly, *PFC* can be determined from the expression:

$$PFC = (f/f_s)^n \cdot 100 \text{ (\%)} \quad (1)$$

where  $(f/f_s)$  stands for the experimentally measured ratio of natural frequencies of the vault with and without movable supports, recorded at the same excitation intensity, and  $n$  is a pertinent power (taken here equal to 2 following the above analytical developments). Application of this equation yield values on the order of 30%, as reported in Table 2.


348  
349

**Table 2: Percentage of Fixed Connection (PFC).**

Configuration	Test N.	PTA [g]	$f_s$ [Hz]	Test N.	PTA [g]	$f$ [Hz]	PFC [%]
B	147	0.03	13.29	151	0.04	6.88	26.80
	176	0.03	13.86	180	0.04	6.87	24.57
	196	0.04	12.65	195	0.04	7.24	32.76
	200	0.04	13.71	199	0.04	6.97	25.85
C	205	0.04	10.54	204	0.04	6.29	35.61
	207	0.06	9.97	206	0.07	5.4	29.34
	209	0.12	8.82	208	0.12	4.75	29.00
	211	0.16	8.31	210	0.18	3.9	22.03
	213	0.04	10.78	212	0.04	6.47	36.02
D	237	0.05	9.4	238	0.04	4.76	25.64
	239	0.07	8.69	240	0.07	4.65	28.63
	241	0.12	7.62	242	0.13	3.71	23.70
	243	0.17	6.65	244	0.18	3.98	35.82
	251	0.04	10.12	252	0.04	5.57	30.29
	255	0.04	10.16	256	0.04	5.41	28.35
	259	0.04	9.78	260	0.04	5.66	33.49


350

351 Figure 12 illustrates the relationship between the back-calculated values of damping ratio and input  
 352 RMS table acceleration for all the investigated configurations. Firstly, relatively high values of  
 353 damping (around 10% or larger) were obtained, due to the considerable dissipative properties of the  
 354 gum layer. Secondly, the damping ratio increases with table acceleration, due to the large movements  
 355 and/or detachments of the blocks. As expected, Configuration 2 provides larger values relative to  
 356 Configuration 1, for which the effect of the confinement panels seems to be more significant,  
 357 especially at low acceleration levels (0.05g). Similarly to Figure 11, the damping ratio is seen, on  
 358 average, to be amplitude-dependent indicating a general increasing trend for Configuration 1.

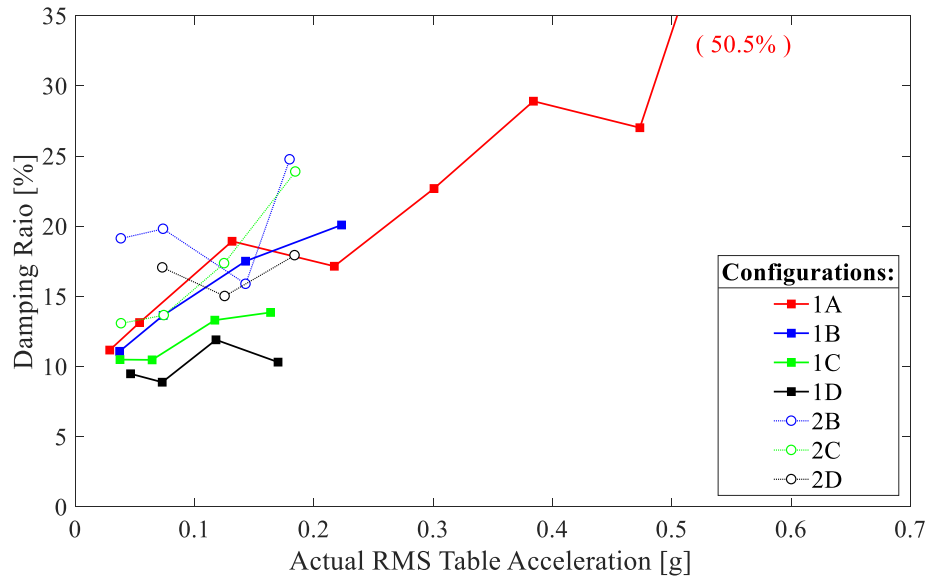

**Figure 12:** Damping ratio as a function of acceleration for all the investigated configurations.

Figure 13 displays the amplification factor obtained from the ratio between the RMS acceleration recorded by the accelerometers on the keystone and on the table. The amplification factor decreases with increasing acceleration, which, in turn, strongly relates to the corresponding increase in damping ratio. The amplification factors can be grouped together for Configurations 1A and 1B (continuous panels) and Configurations 1C and 1D (interrupted or no panels) and follow the same trend. The difference between these groups highlights the effect of lateral confinement: the stronger the confinement, the larger the amplification factor. The absence of a continuous lateral confinement for the arches parallel to the input direction (i.e. absence or interruption of panels orthogonal to the input direction) leads to far smaller - by more than 3 times - amplification factors. As far as Configurations 2 are concerned, the presence of moveable springings forces the amplification factors into a single band, comparable with those obtained for Configurations 1A and 1B.

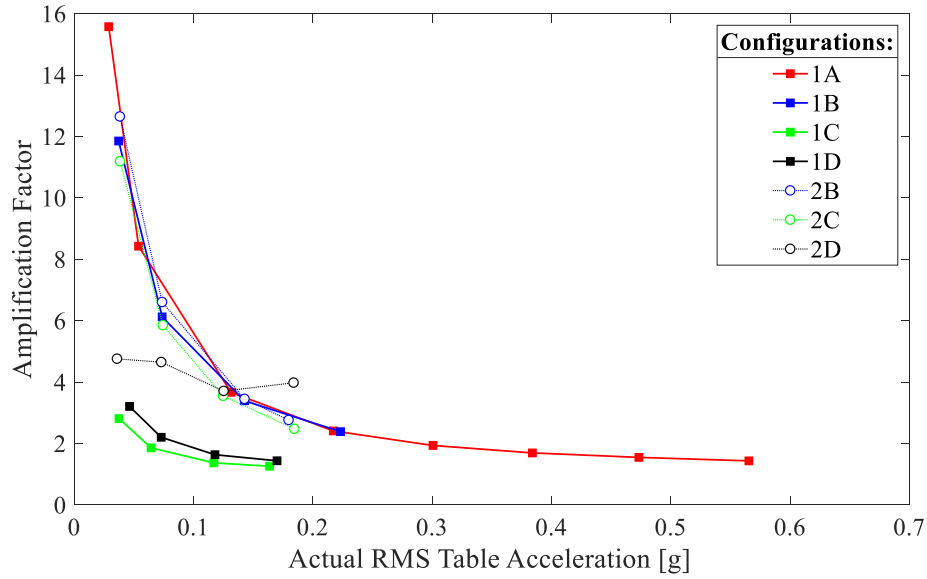

**Figure 13:** Amplification factor (ratio of RMS accelerations) as a function of acceleration for all the investigated configurations.


## 9 Preliminary observations from sinusoidal tests

Simple inspection of Table A1 allows the following observation to be made: all other conditions being the same (i.e. same lateral confinement given by the Plexiglas panels) and under low-frequency excitation, Configuration 2 (subjected to differential horizontal “in-plane shear” displacements at the supports through two moveable springs) reaches collapse at a lower acceleration than Configuration 1 (subjected to uniform motion at four fixed supports). Specifically, Configuration 2 collapsed for an acceleration of around 0.4 g (i.e. average between total collapse at 0.25 g for 2 Hz input and partial collapse at 0.5 g for 3 Hz input), whilst Configuration 1 collapsed at around 1 g for a 2 Hz input. This suggests that the pseudo-static response of the vault induced by imposed “in-plane shear” displacements at its springings often represents the predominant cause of damage/failure, overshadowing the dynamic response of the vault itself [19].


The analyses of the cumulative displacements within the different series of tests and the collapse accelerations obtained in test #139 (collapse after cumulative damage due to several successive sinusoidal excitations) and test #143 (direct application of the collapse excitation imposed on the preceding test) show that the specific vault is not particularly susceptible to cumulative damage.

The time-histories of displacements obtained by the vision data system for the marker on the keystone were analysed in order to: (i) obtain the maximum displacement recorded during each test and (ii) evaluate the cumulative displacements before collapse within the test sequences.


395 Figures 14, 15 and 16 illustrate the peak recorded relative (with respect to the shaking table)  
 396 horizontal displacement of the keystone during the sinusoidal series of tests for Configurations 1A,  
 397 1B, 2B and 2C, respectively. It can be seen that for all the tested configurations, the physical model  
 398 was vulnerable to low frequencies, especially near 2 Hz, whose maximum induced displacements far  
 399 exceeded those produced at higher frequencies and same accelerations. Keystone maximum relative  
 400 horizontal displacements to high-frequency inputs such as 50 Hz, 20 Hz or 15 Hz exhibited an almost  
 401 horizontal asymptotic trend with increasing acceleration, without exceeding values around 0.5 mm.  
 402 Inputs of 2 Hz induced considerable movements (unexpected amplification), which may indicate that  
 403 the “effective” fundamental frequency of the nonlinear physical model is around that value, at least  
 404 for large acceleration amplitudes ( $> 0.6$  g for fixed boundary conditions and  $> 0.25$  g for moveable  
 405 ones), for which it was not possible to perform random motion tests. As expected, the vault model in  
 406 Configuration 2 is more flexible. Indeed, the keystone max relative displacements recorded for  
 407 Configuration 2 (Figures 15b and 16) are around 10 times higher than those recorded for  
 408 Configuration 1 at the same acceleration level (Figures 14 and 15a).

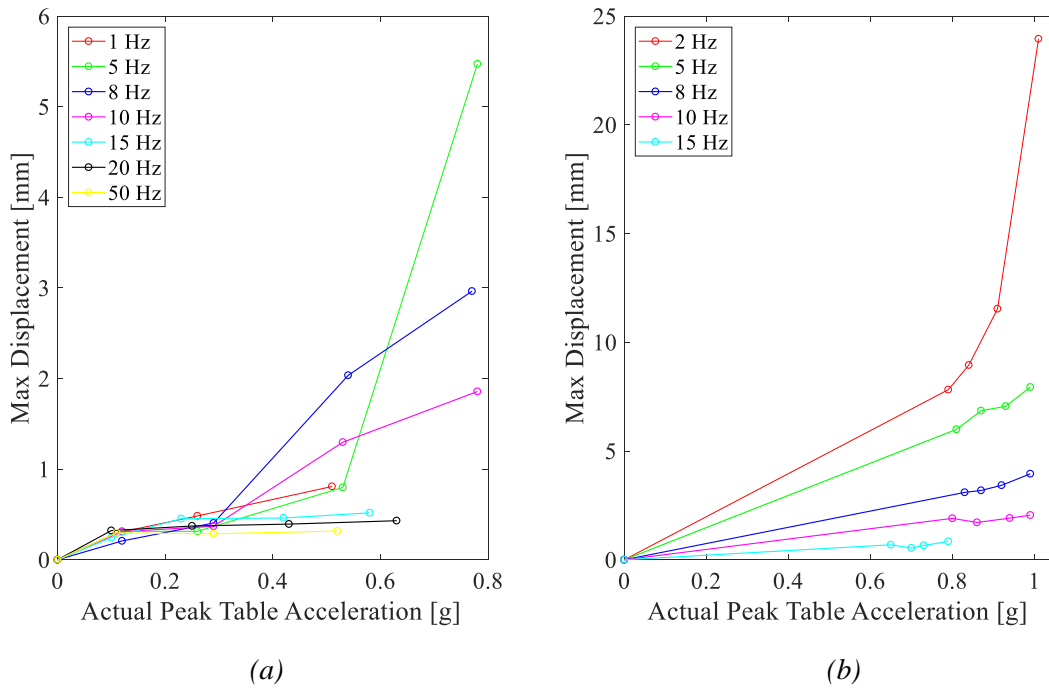

409  
 410  
 411 **Figure 14:** Maximum relative horizontal displacement of the keystone as function of the PTA for sinusoidal  
 412 input characterised by different frequencies and Configuration 1A: (a) series of tests #4 to #30 and (b) series  
 413 of tests #33 to #52. Note the large difference in scale of displacement.

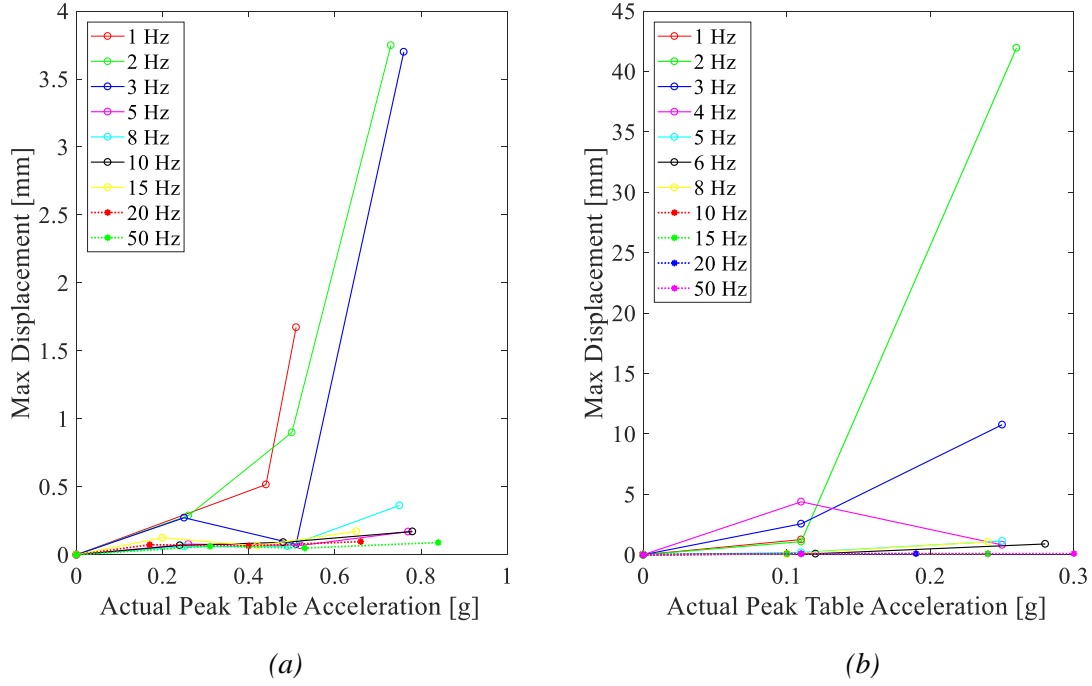

**Figure 15:** Maximum relative horizontal displacement of the keystone as function of the PTA for sinusoidal input characterised by different frequencies: (a) series of tests #79 to #106 for Configuration 1B and (b) series of tests #152 to #173 for Configuration 2B. Note the large difference in scale of displacement.

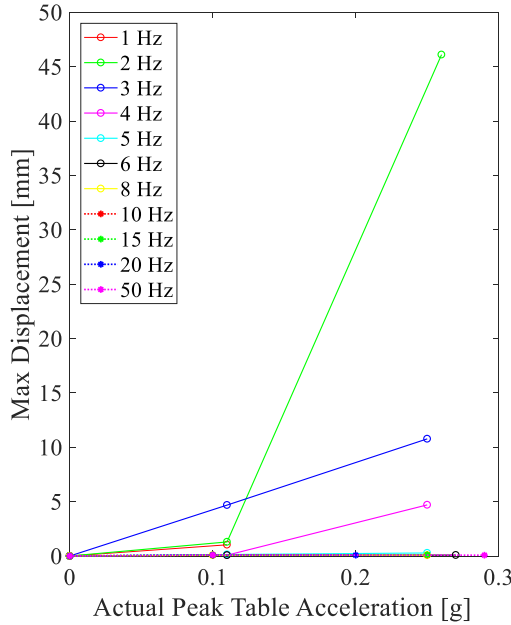

**Figure 16:** Maximum relative horizontal displacement of the keystone as function of the PTA for sinusoidal input characterised by different frequencies for Configuration 2C: series of tests #214 to #235.

Since no reassembly of blocks was done prior to collapse, each test naturally starts from a displaced condition that can be interpreted as an accumulated damage state. Figures 17-20 report the residual displacements at the end of each sinusoidal test that accrue along the test series until collapse is

426 reached. The sequences investigated involve sinusoidal tests with duration of 10 cycles and  
427 frequencies in the range of 1 – 50 Hz for each step of increasing acceleration levels.

428 Figure 17 shows the cumulative residual displacements of the keystone for the test sequences before  
429 collapse at a PTA of 1 g for Configuration 1A. A jump in residual displacements is observed each  
430 increase of acceleration, while no significant residual displacements are provoked by a change of  
431 frequency. In the horizontal direction parallel to the applied input (X), the cumulative displacement  
432 before the last test of the first sequence is around 1.5 mm, while in the vertical direction (Z) it is 13.5  
433 mm.


434 Figures 18a and b show the cumulative residual displacements for Configuration 1B, as obtained  
435 under a 10-cycle harmonic tests sequence and 100-cycle harmonic tests sequence, respectively. On  
436 one hand, the collapse at a PTA of 0.75 g was not achieved after 3 series of 10-cycle sinusoidal tests,  
437 reaching a final residual displacement of around 0.18 mm (after a peak value of around 0.25 mm) in  
438 the horizontal direction and 3 mm in the vertical direction (Figure 18a). On the other hand, the  
439 collapse at a PTA of 0.75 g was achieved after eight low-frequency (3 – 5 Hz) 100-cycle sinusoidal  
440 tests (Figure 18b). The final residual displacement reached before collapse was induced by the long  
441 input was larger than the one measured for the short input: around 3.3 mm in the direction of  
442 excitation (X) and 70 mm in the vertical one (Z).

443 The order of magnitude of residual displacements recorded before collapse at a PTA of 0.25 g for  
444 Configurations 2B (Figure 19) and 2C (Figure 20) are the same: 1 – 2 mm in the horizontal direction  
445 and 10 – 13 mm in the vertical one. In this case of moveable springings, there is a sudden dramatic  
446 effect with decreasing input frequency, specifically from 4 Hz to 3 Hz (partial collapses at double  
447 residual displacements) and finally at 2 Hz (total collapse).


448 In general, in the vertical direction and except for some rare cases in which small adjustments  
449 occurred, the displacements accumulate downwards, whilst in the horizontal direction displacements  
450 can pile up, sometimes towards one side and sometimes towards the other, thus providing a response  
451 pattern reminiscent of “structural resurrection” [42].

452




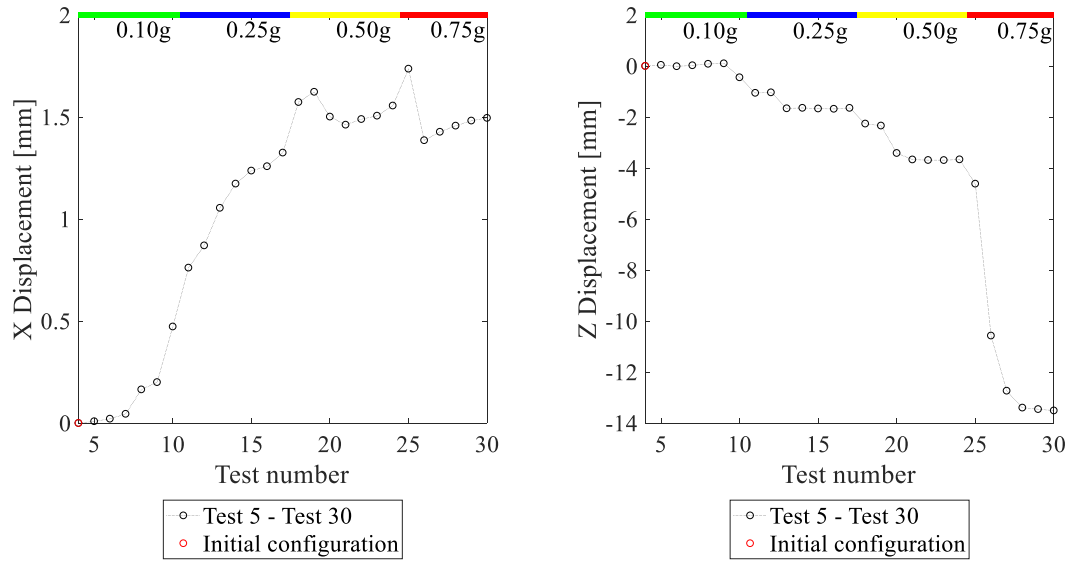

**Figure 17:** Cumulative absolute residual displacement in X (horizontal) and cumulative residual displacement in Z (vertical) directions for Configuration 1A series of tests #5 to #30.

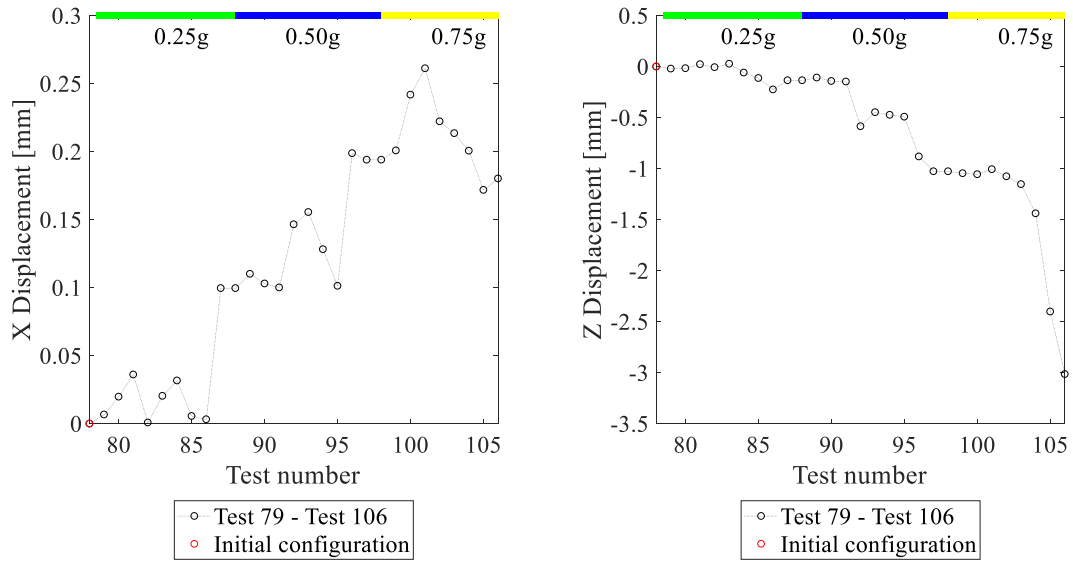


(a)

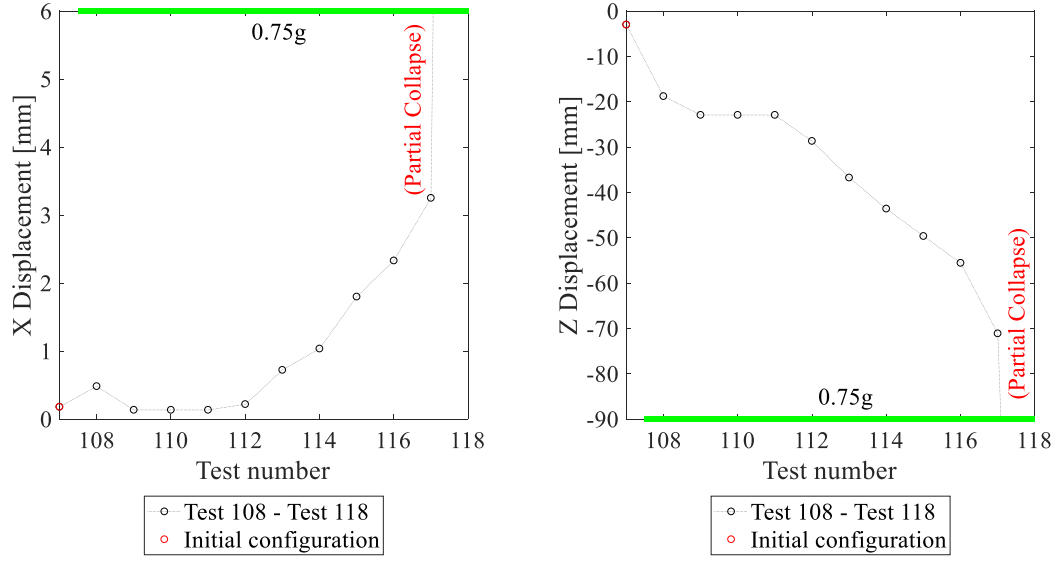


(b)

**Figure 18:** Cumulative absolute residual displacement in X (horizontal) and cumulative residual displacement in Z (vertical) directions for Configuration 1B: (a) series of tests #79 to #106; (b) series of tests 108-109 and 112 to 118 input characterized by 100 cycles.

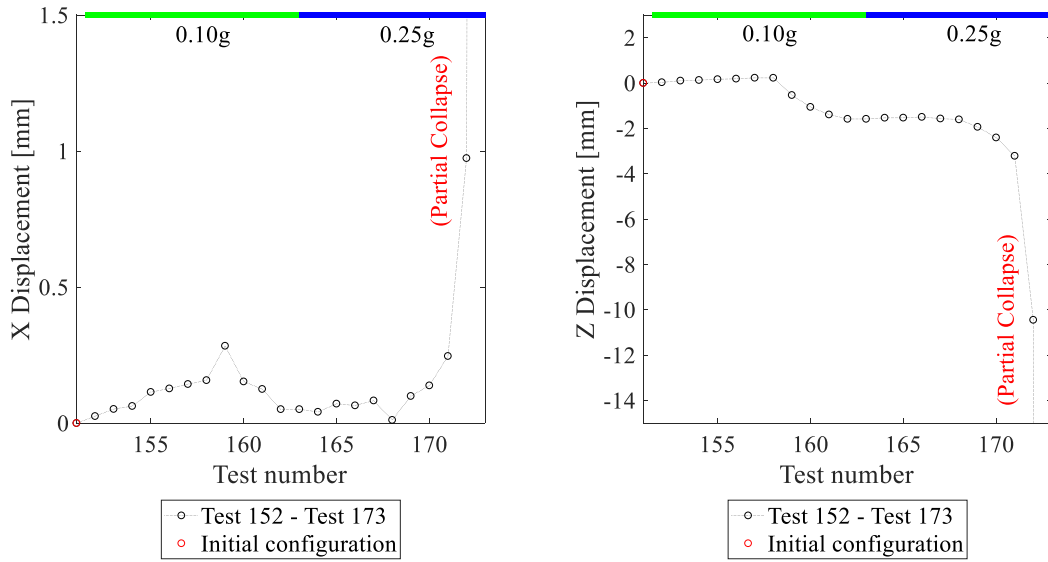

**Figure 19:** Cumulative absolute residual displacement in X (horizontal) and cumulative residual displacement in Z (vertical) directions for Configuration 2B series of tests #152 to #173.

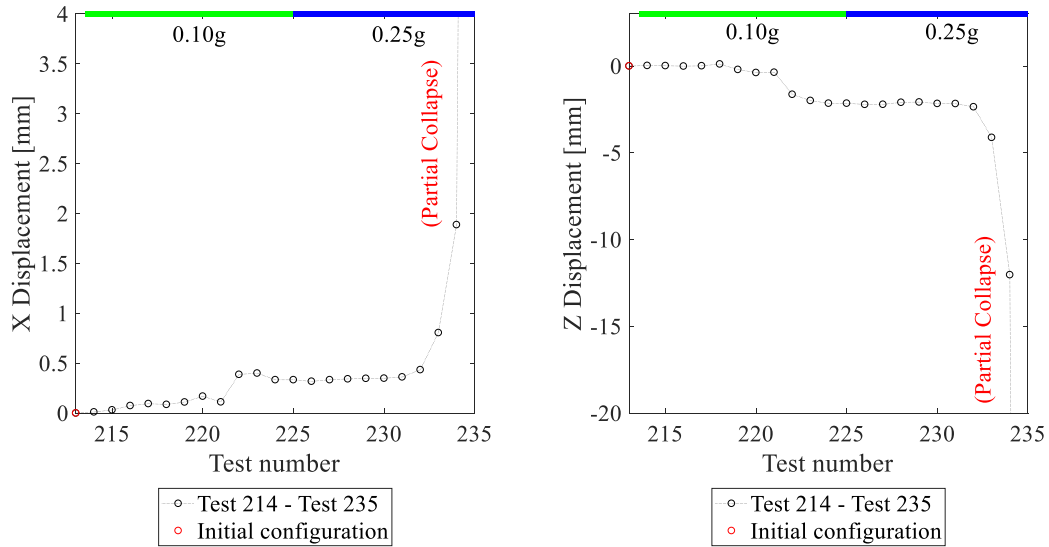


**Figure 20:** Cumulative absolute residual displacement in X (horizontal) and cumulative residual displacement in Z (vertical) directions for Configuration 2C series of tests #214 to #235.


The failure mechanisms observed for the various experimental configurations can be characterised by two different collapse behaviours, which correspond to the two base boundary conditions employed: fixed and moveable.

For the fixed configuration, the deformed shapes recorded just before collapse appear symmetric and are characterised by a failure event, namely the formation of a cylindrical hinge on the upper central part of the vault, orthogonal to the input direction (marked with arrows in Figure 21).

In contrast, for the moveable configuration, the crack pattern shows a typical shear damage, and the failure starts with a diagonal crack at the North web until the progressive collapse of the central part and the West web (Figure 22). Mechanical failure was mostly the result of shearing causing dislocations and crack propagation. The crack pattern observed before collapse is similar to that obtained earlier by some of the authors with pseudo-static tests that investigated the effects of in-plane shear displacements at the springings of cross vaults [19], [43]. It is worth noticing that this crack pattern is in agreement with that detected at the intrados of the nave vaults next to the façade (same boundary conditions as in Configuration 2) in churches following major earthquakes [44], [45]. The different lateral confinement does not seem to significantly influence the failure mechanism.

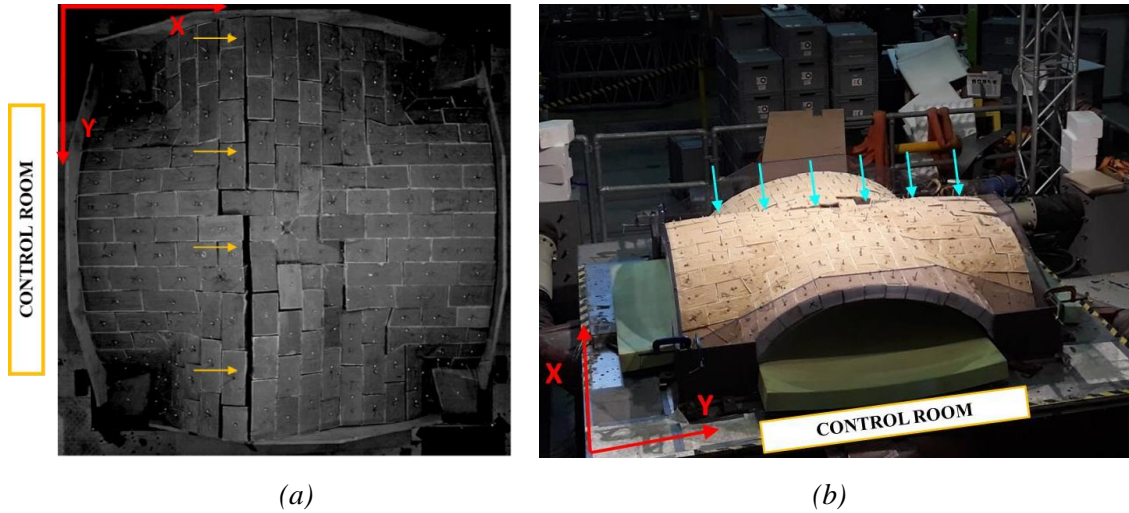

**Figure 21:** Failure mechanism at: (a) 2Hz with PTA 1 g for Configuration 1A, (b) 3Hz with PTA 1 g for Configuration 1B.

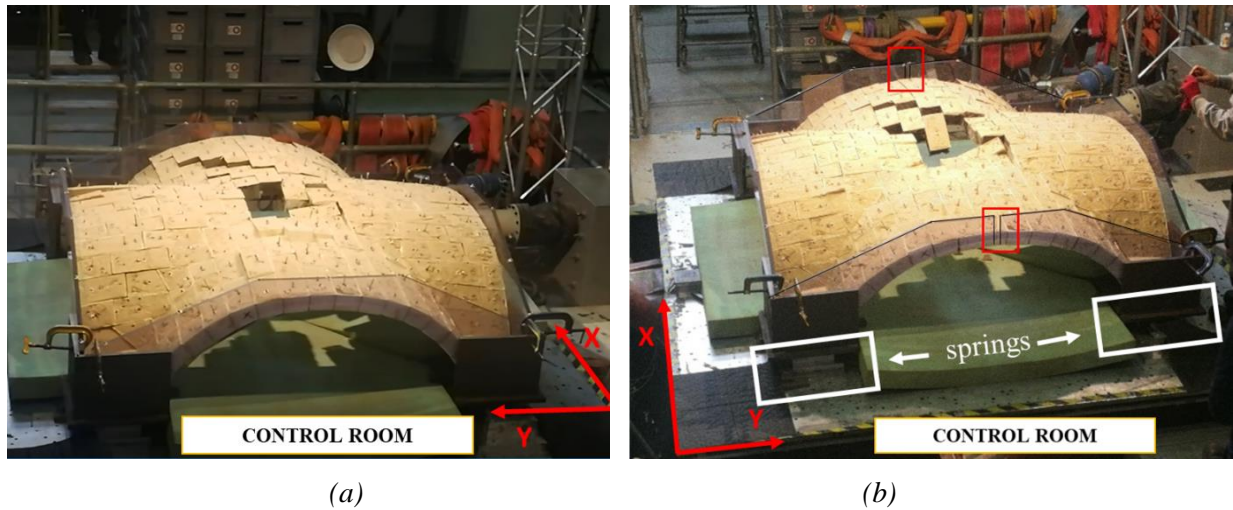


**Figure 22:** Failure mechanism at: (a) 2 Hz with PTA 0.25 g for Configuration 2B, (b) 2 Hz with PTA 0.25 g for Configuration 2C.

## 10 Earthquake tests


Tests #56 to #60 were performed using three real acceleration records (Modena and Mirandola stations from the Emilia 2012 earthquake and El Centro 1940 NS). These tests did not induce any visible damage on the vault.

Figure 23 compares the acceleration time-histories recorded on the keystone for the three sinusoidal tests #25 - #26 - #30, with PTA's of around 0.7 g and frequencies of 2 Hz, 5 Hz and 20 Hz, respectively, and for the El Centro earthquake record with a PTA of around 0.7 g. These plots provide further confirmation as to the nonlinear response of the model, which is characterised by an “effective” fundamental frequency that decreases with increasing acceleration (Fig. 11). Specifically, for a PTA of around 0.7 g, extrapolation of the results reported in Fig. 11 (note it was impossible to

506 apply random input motions with higher PTA) indicates that the effective fundamental frequency of  
 507 the model in Configuration 1A is close to 6 Hz. Figure 23 shows that the fundamental frequency is  
 508 closer to 5 Hz, since the keystone response to the 5 Hz harmonic input displays a larger amplification  
 509 factor (around 2.6) with respect to those obtained for higher frequency input (test #30 with an  
 510 amplification of slightly above 1) and a lower one (test #25, no amplification). Figure 24 displays the  
 511 pseudo-acceleration spectrum of the signal recorded by the accelerometer on the table during test #58,  
 512 which indicates that the predominant frequencies of the earthquake input are around 1.5 Hz, i.e. far  
 513 from the 5-6 Hz range of the model at acceleration levels of 0.7 g. For this reason, the El Centro input  
 514 was not as critical for the model as the other ones, since it would require higher accelerations (on the  
 515 order of 1 g) that were not applied, to induce damage.  
 516 Extrapolation of the results to real vaults, other than the general significance of the non-linear  
 517 response identified for the models at hand, lies beyond the scope of this paper.

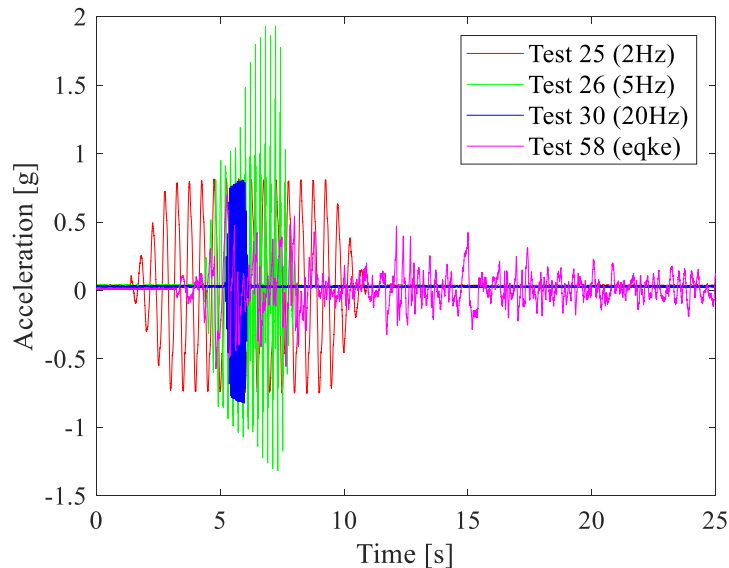

518  
 519 **Figure 23:** Comparison between the acceleration time-histories recorded on the keystone during the  
 520 sinusoidal tests #25 (PTA = 0.74 g, 2 Hz) - #26 (PTA = 0.78 g, 5 Hz) - #30 (PTA = 0.63 g, 20 Hz) - and the  
 521 seismic test #58 (El Centro earthquake).

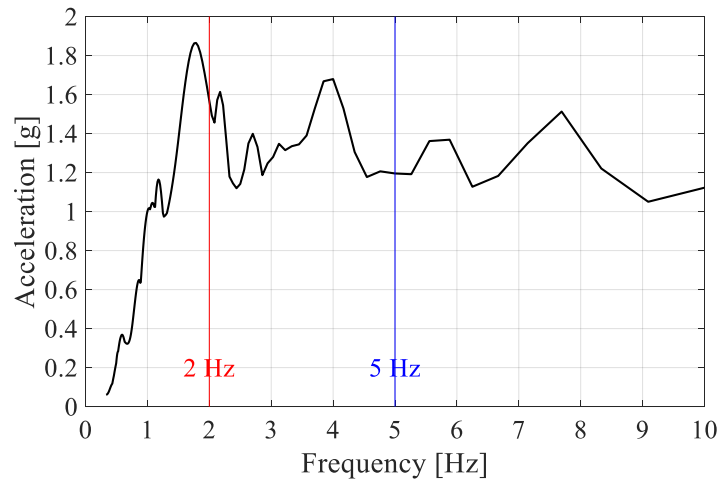

**Figure 24:** Pseudo-acceleration spectrum ( $\xi=5\%$ ) of the signal recorded during test #58 (El Centro earthquake).

## 11 Conclusions

A novel experimental campaign encompassing 266 shaking table tests was carried out at EQUALS laboratory, University of Bristol, UK, on a 2m x 2m x 0.7m scaled groin vault model made of plastic 3D printed blocks filled with mortar. The advantages of using 3D printers to manufacture the blocks relate to the workability and the repeatability of the tests: the plastic blocks do not break during collapse and can be immediately reused after each test, as they are fixed with a gum layer - not fresh mortar. Although no specific prototype was targeted, a geometric scaling factor between 5 and 10 can be assumed, in accordance with relevant studies in the literature. The vault was built according to two support conditions. The first (Configuration 1) uses four fixed supports, while the second (Configuration 2) employs two fixed supports and two one-way moveable carriages equipped with lateral springs. Different lateral confinement levels along the four lateral arches (wooden panels, Plexiglas panels, cut Plexiglas panels, no panels) were also considered. Random signal tests of variable amplitude were carried out to shed light on the non-linear dynamic properties of the model. Harmonic inputs with different frequencies ranging between 1 Hz and 50 Hz were imposed, with increasing amplitude, along a single horizontal direction, up to collapse. A number of seismic tests using actual recorded motions were also performed.

The following conclusions were drawn from the experimental campaign:

1. The presence of the gum layer - essential for the rapid reconstruction of the model following collapse - has a strong influence on the global behaviour of the vault and seems to govern dynamic response, especially for low-frequency, high-acceleration harmonic inputs. The experimental observations revealed a tendency to activate different stiffness (and “effective”

natural frequencies) for each PTA level, which indicates a strongly non-linear behaviour.

2. For the aforementioned geometric scaling factor of about 5 to 10 and in light of Housner's rocking model, dynamic time is scaled by a factor of roughly 2 to 3. However, the physical modelling relative to a real vault is imperfect, since stress similitude is not preserved (e.g. the elastic moduli of the materials are not faithfully scaled). Eventually, this violation is of minor importance as sliding/rocking behaviour prevails close to failure and the associated response is less affected by stress-strain laws.

3. The effective fundamental frequency and damping of the vault naturally decreases and increases, respectively, with increasing acceleration.
4. The dynamic amplification of the vault model is mainly influenced by the lateral confinement level: the stronger the confinement, the larger the amplification factor.
5. All other conditions being equal, Configuration 2 (differential horizontal "in-plane shear" displacements at the supports through two springs) reaches the collapse condition for a lower PTA than Configuration 1. This underlines that the pseudo-static response of the vault induced by imposed displacements at its springings often represents the predominant cause of damage/failure, overshadowing the dynamic response of the vault itself.
6. The analysis of cumulative displacements and the collapse PTA values indicate that the vault put together with gum-layer interfaces is not particularly susceptible to cumulative damage, possibly due to the ability of the elastic layer at the joints to return to the original configuration - in contrast to the stiff brittle mortar in real vaults (structural restoration).
7. The seismic response of the vault depends, as expected, on the critical frequency range of the earthquake input.
8. The dynamic response of the vault with no panels along the lateral arches is similar to that of a weakly confined vault through the Plexiglas panels and indicates that the corner areas close to the springings are critical both for static stability and seismic performance. This seems to be known since ancient times, since inspection of past repairs indicates that these areas were frequently strengthened to be better embedded in the surrounding vertical masonry structures.

## 12 Acknowledgements

The SEBESMOVA3D project (SEismic BEhavior of Scaled MOdels of groin VAults made by 3D printers, <https://sera-ta.eucentre.it/index.php/sera-ta-project-22/>) was funded by European Union's Horizon 2020 research and innovation programme SERA, under grant agreement No 730900. The



580 authors are grateful for this support. Thanks are also due to the laboratory personnel at EQUALS  
 581 laboratory, University of Bristol, UK.

582

### 583 13 References

- 584 [1] Parisi F., Luca F., Petruzzelli F., Risi R., Chioccarelli E., Field Inspection after the May 20th  
 585 and 29th 2012 Emilia-Romagna Earthquakes. Technical Report; 2012.
- 586 [2] Dolce M., Nicoletti M., Ammirati A., Bianconi R., Filippi L., Gorini A., Marcucci S., Palma  
 587 F., Zambonelli E., Lavecchia G., De Nardis R., Brozetti F., Boncio P., Cirillo D., Romano  
 588 M.A., Costa G., Gallo A., Tiberi L., Zoppè G., Suhadolc P., Ponziani F., Formica A., The  
 589 Emilia Thrust Earthquake of 20 May 2012 (Northern Italy): Strong Motion and Geological  
 590 Observations -Report 1-. Technical Report; 2012.
- 591 [3] Lagomarsino S., Damage assessment of churches after L'Aquila earthquake (2009). Bull  
 592 Earthq Eng. vol. 10, no. 1, pp. 73–92, 2012. doi:10.1007/s10518-011-9307-x.
- 593 [4] Baker J.F., A review of recent investigations into the behaviour of steel frames in the plastic  
 594 range. J Inst Civ Eng. vol. 31:188, 1949.
- 595 [5] Neal B.G., Symonds P.S., The calculation of collapse loads for framed structures. (includes  
 596 appendix). J Inst Civ Eng. vol. 35(1), pp. 21–40, 1950.
- 597 [6] Symonds P.S., Neal B.G., The calculation of failure loads on plane frames under arbitrary  
 598 loading programmes. J Inst Civ Eng. vol. 35(1), pp. 41–61, 1950.
- 599 [7] Heyman J., The stone skeleton. Int J Solid Struct. vol. 2, 1996.
- 600 [8] Heyman J., The safety of masonry arches. Int J Solids Struct. vol. 11, 1969.
- 601 [9] Heyman J., The Stone Skeleton. (Press CCU, ed.). Cambridge: Cambridge University Press;  
 602 1995.
- 603 [10] De Lorenzis L., DeJong M., Ochesendorf J., Failure of masonry arches under impulse base  
 604 motion. Earthq Eng Struct Dyn. no. June, pp. 2119–2136, 2007. doi:10.1002/eqe.
- 605 [11] Ferrario L., Alessandra M., Andreis V., Zanotti S., Riva P., Giuriani E., Behavior and  
 606 retrofitting of single-leaf vaults under distributed horizontal forces. In: Structural Analysis of  
 607 Historical Constructions –Jerzy Jasieński (Ed). ; 2012.
- 608 [12] Shapiro E.E., Collapse mechanisms of small-scale unreinforced masonry vaults. Master  
 609 Thesis, Massachusetts Institute of Technology, 2012. <http://hdl.handle.net/1721.1/72648>.
- 610 [13] Theodossopoulos D., Structural behaviour of historic masonry cross vaults. Thesis submitted  
 611 for the Degree of Doctor of Philosophy, School of Civil and Environmental Engineering,  
 612 University of Edinburgh 2002.
- 613 [14] Theodossopoulos D., Sanderson J, Scott M., Strengthening Masonry Cross Vaults Damaged  
 614 by Geometric Instability. In: Key Engineering Materials. vol. 624, no. January 2015, pp. 635–  
 615 643. doi:10.4028/www.scientific.net/KEM.624.635.
- 616 [15] Como M., Statics of Historic Masonry Constructions. 3rd ed. Springer Series in Solid and  
 617 Structural Mechanics; 2017.
- 618 [16] Milani G., Rossi M., Calderini C., Lagomarsino S., Tilting plane tests on a small-scale masonry  
 619 cross vault: Experimental results and numerical simulations through a heterogeneous  
 620 approach. Eng Struct. vol. 123, pp. 300–312, 2016. doi:10.1016/j.engstruct.2016.05.017.
- 621 [17] Rossi, M., Calderini, C., Lagomarsino, S., and Milani G. Seismic response of masonry vaulted  
 622 structures : experimental and numerical modelling. In: 9th International Masonry Conference.  
 623 2014.
- 624 [18] Gaetani A., Seismic performance of masonry cross vaults: learning from historical  
 625 developments and experimental testing. PhD Thesis, University Minho. 2016.
- 626 [19] Carfagnini C., Baraccani S., Silvestri S., Theodossopoulos D., The effects of in-plane shear  
 627 displacements at the springings of Gothic cross vaults. Constr Build Mater. vol. 186, pp. 219–

232, 2018. doi:10.1016/j.conbuildmat.2018.07.055.

- [20] D’Altri A.M., Castellazzi G., De Miranda S., Tralli A., Seismic-induced damage in historical masonry vaults: a case-study in the 2012 Emilia earthquake-stricken area. *J Build Eng*, vol. 13, no. August, pp. 224–243, 2017. doi:10.1016/j.job.2017.08.005.
- [21] Creazza G., Satta A., Matteazzi R., Vitaliani R., Analyses of masonry vaults: a macro approach based on three-dimensional damage model. *Struct Eng*, vol. 128, pp. 646–654, 2002.
- [22] Van Mele T., McInerney J., DeJong M.J., Block P., Physical and Computational Discrete Modelling of Masonry Vault Collapse. *Struct Anal Hist Constr. Vols 1-3*, pp. 2552–2560, 2012.
- [23] Calderini C., Lagomarsino S., Rossi M., De Canio G., Mongelli M.L., Roselli I., Shaking table tests of an arch-pillars system and design of strengthening by the use of tie-rods. *Bull Earthq Eng*, vol. 13, no. 1, pp. 279–297, 2015. doi:10.1007/s10518-014-9678-x.
- [24] Gaetani A., Lourenço P.B., Monti G., Moroni M., Shaking table tests and numerical analyses on a scaled dry-joint arch undergoing windowed sine pulses. *Bull Earthq Eng*, vol. 15, no. 11, pp. 4939–4961, 2017. doi:10.1007/s10518-017-0156-0.
- [25] Clemente P., Introduction to dynamics of stone arches. *Earthq Eng Struct Dyn*. 1998.
- [26] Giamundo V., Lignola G.P., Maddaloni G., da Porto F., Prota A., Manfredi G., Shaking table tests on a full-scale unreinforced and IMG retrofitted clay brick masonry barrel vault. *Bull Earthq Eng*, vol. 14, no. 6, pp. 1663–1693, 2016. doi:10.1007/s10518-016-9886-7.
- [27] Williams M.S., Albuerne A., Lawson V., Yip F., Model Scale Shaking Table Tests on Masonry Barrel and Cross Vaults. *Proc 15th world Conf Earthq Eng Lisbon*. 2012:1-10.
- [28] Lagomarsino, S., Modaressi, H., Pitilakis, K., Bosiljkov, V., Calderini, C., D’Ayala, D., Benouar, D., Cattari, S., PERPETUATE Project: The Proposal of a Performance-Based Approach to Earthquake Protection of Cultural Heritage. In: *Advanced Materials Research*. ; 2012.
- [29] Rossi M., Calderini C., Lagomarsino S., Experimental testing of the seismic in-plane displacement capacity of masonry cross vaults through a scale model. *Bull Earthq Eng*, vol. 14, no. 1, pp. 261–281, 2016. doi:10.1007/s10518-015-9815-1.
- [30] Foti D., Silvestri S., Baraccani S., Ivorra S., Theodossopoulos D., Vacca V., Campanella V., Ocho Roman J.V., Cavallini L., White R., Dietz M., Mylonakis G., Experimental tests of a groin vault in dry-bonded voussoirs under dynamic excitation. In: *17th World Conference on Earthquake Engineering*, 17WCEE, 2020
- [31] Foti D., Vacca V., Facchini I., DEM modeling and experimental analysis of the static behavior of a dry-joints masonry cross vaults. *Constr Build Mater*. vol. 170, pp. 111–120, 2018.
- [32] Foti D, Lerna M, Sabbà MF, Vacca V. On the collapse behavior of a wood arch made with modular hollow blocks. *WSEAS Trans Environ Dev*, vol. 15, pp. 279–287, 2019.
- [33] Diaferio M., Dassisti M., Foti, D., Vacca V., Analysis of a Mock-Up of a New Sustainable Easy-Assembling Modular Arch. *Structures*, vol. 19, pp. 309–321, 2019.
- [34] Quinonez A., Zessin J., Nutz A., Ochsendorf J., Small-scale models for testing masonry structures. *Adv Mater Res*. vol. 133–134, pp. 497–502, 2010. doi:10.4028/www.scientific.net/AMR.133-134.497.
- [35] Fallacara G., Stereotomy - Stone Architecture and New Research. In: *Presses des Ponts*, ed. ; 2012.
- [36] Fallacara G., Barberio M., Stereotomy 2.0: Informing the future of Digital Stereotomy. *Nexus Netw Journal*, a peer-reviewed J co-published Distrib by Birkhäuser/Springer-Basel. 2018.
- [37] Croci G., The collapses occurred in the basilica of St. Francis of Assisi and in the cathedral of Noto. *Struct Anal Hist Constr II*. 1998.
- [38] Piermarini E., The Dynamic Behavior of the Basilica of San Francesco of Assisi. Master Thesis of Engineering, Massachusetts Institute of Technology, 2013.
- [39] Cancino C., Farneth S., Garnier P., Vargas J., Webster F., Estudio de Daños a Edificaciones Históricas de Tierra Después Del Terremoto Del 15 de Agosto Del 2007 En Pisco, Perú. *The Getty Conservation Institute Los Angeles*; 2009.

- [40] Housner G.W., The behavior of inverted pendulum structures during earthquakes. *Bull Seismol Soc Am*, vol. 53, no. 2, pp. 403–417, 1963AD.
- [41] Acikgoz S., DeJong M.J., The interaction of elasticity and rocking in flexible structures allowed to uplift. *Earthquake Eng Struct Dyn*. vol. 41, no. 15, p. 2177-2194, 2012.
- [42] Vamvatsikos D., Cornell C.A., Incremental Dynamic Analysis. *Earthq Eng Struct Dyn*. vol. 31, no. 3, pp. 491–514, 2002.
- [43] Baraccani S., Zauli L., Theodossopoulos D., Silvestri S., Experimental test on a fibre-reinforced scaled cross vault subjected to in-plane shear displacements at the springings. *Constr Build Mater, Construction and Building Materials* 265 (2020) 120305, <https://doi.org/10.1016/j.conbuildmat.2020.120305>.
- [44] Baraccani S., Silvestri S., Gasparini G., Palermo M., Trombetti T., Silvestri E., Lancellotta R., Capra A., A Structural Analysis of the Modena Cathedral. *Int J Archit Herit*. vol. 10, no. 2–3, 2016. doi:10.1080/15583058.2015.1113344.
- [45] Basile G., Restauri in San Francesco Ad Assisi: Il Cantiere Dell’utopia : Studi, Ricerche e Interventi Sui Dipinti Murali e Sulle Vetrate Dopo Il Sisma Del 26 Settembre 1997. Perugia, Italy: Quattroemme; 2007.
- [46] Bianchini N., Mendes N., Calderini C., Candeias P.X., Rossi M., Lourenço P, Seismic response of a small-scale masonry cross vault: Experimental investigation by performing quasi-static and shake table tests, DOI: 10.21203/rs.3.rs-188815/v1, submitted to *Bulletin of Earthquake Engineering*, February 2021.
- [47] Mylonakis G., Gazetas G.. Soil-Structure Interaction: Beneficial or Detrimental? *Journal of Earthquake Engineering*, vol. 4, no. 3, pp. 277-301.

## 14 Appendix

Table A1 summarises all tests performed and provides information regarding the sequence of tests, collapses and subsequent reconstructions. This is fundamental to deeply understand the overall experimental campaign and to frame the specific results of the single tests. It may also constitute a service table for independent researchers that aim to scrutinise further the experimental results. Some notes: at the “table acceleration” column, values are measured by the accelerometer put on the table and the actual Root Mean Square (RMS) acceleration is reported for random white noise tests, whilst the actual Peak Table Acceleration (PTA) is reported for harmonic tests. In the “frequency” column, in general, the frequency of the applied harmonic input is reported, except for the random tests for which  $f_r$  indicates the “recorded system frequency” as obtained by analysing the acceleration output signal of the accelerometer on the keystone of the vault. Notation “Part.Col.” stands for partial collapse.

**Table A1:** Full list of all tests performed.

Config.	Test N.	Type of signal	Table Acceleration (RMS or PEAK)	Direction	Freq. [Hz]	Damping Ratio [%]	Config.	Test N.	Type of signal	Table Acceleration (RMS or PEAK)	Direction	Freq. [Hz]	Damping Ratio [%]
1A	1	Random	0.03	X	$f_r=19.85$	11.13	1B	140	Random	0.03	X	$f_r=14.37$	14.22
1A	2		0.03	Y	$f_r=19.18$	12.91	1B	141		0.03	Y	$f_r=13.88$	11.58
1A	3		0.09	Z	$f_r=21.63$	11.93	1B	142		0.90	X	3	
1A	4	Sin 10 c	0.11	X	1		1B	143	Sin 10 c	1.04			Collapse
1A	5		0.12		5		1B	144	Random	0.04	X	$f_r=11.99$	16.94
1A	6		0.12		8		1B	145		0.03	Y	$f_r=13.34$	11.33
1A	7		0.12		10		2B	146		0.04	X	$f_r=7.36$	19.13
1A	8		0.10		15		1B (by means of 2B)	147	Random	0.03	Y	$f_r=13.29$	11.34
1A	9		0.10		20		2B	148		0.07	X	$f_r=6.01$	19.81
1A	10		0.11		50		2B	149		0.14		$f_r=5.24$	15.89
1A	11		0.26		1		2B	150		0.18		$f_r=4.87$	24.76
1A	12		0.26		5		2B	151		0.04		$f_r=6.88$	20.50
1A	13		0.29		8		2B	152	Sin 10 c	0.11	X	50	
1A	14	Sin 10 c	0.29	X	10		2B	153		0.11		20	
1A	15		0.23		15		2B	154		0.10		15	
1A	16		0.25		20		2B	155		0.10		10	
1A	17		0.29		50		2B	156		0.10		8	
1A	18	Sin 10 c	0.51	X	1		2B	157		0.12		6	
1A	19		0.53		5		2B	158		0.11		5	
1A	20		0.54		8		2B	159		0.11		4	
1A	21		0.53		10		2B	160		0.11		3	

1A	22		0.42		15		2B	161	Random	0.11	X	2			
1A	23		0.43		20		2B	162		0.11		1			
1A	24		0.52		50		2B	163		0.04		$f_r=6.48$	25.41		
1A	25	Sin 10 c	0.74	X	2		2B	164	Sin 10 c	0.30	X	50			
1A	26		0.78		5		2B	165		0.19		20			
1A	27		0.77		8		2B	166		0.24		15			
1A	28		0.78		10		2B	167		0.24		10			
1A	29		0.58		15		2B	168		0.24		8			
1A	30		0.63		20		2B	169		0.28		6			
1A	31		1.11		2	Collapse	2B	170		0.25		5			
1A	32	Random	0.03	X	$f_r=15.79$	12.4	2B	171		0.25		4			
1A	33	Sin 10 c	0.65	X	15		2B	172	Sin 30 c	0.25		3			
1A	34		0.80		10		2B	173		0.26	2	Part.Col.			
1A	35		0.83		8		2B	174		0.25	2	Collapse			
1A	36		0.81		5		2B	175		0.04	X	$f_r=7.07$	17.49		
1A	37		0.79		2	1B (by means of 2B)	176	Random		0.03	Y	$f_r=13.86$	9.44		
1A	38	Sin 10 c	0.70	X	15		2B	177	Sin 10 c	0.07	X	3			
1A	39		0.86		10		2B	178	Random	0.04		$f_r=7.04$	17.15		
1A	40		0.87		8		2B	179	Sin 10 c	0.12		3			
1A	41		0.87		5		2B	180	Random	0.04		$f_r=6.87$	16.93		
1A	42		0.84		2		2B	181	Sin 10 c	0.16		3			
1A	43	Sin 10 c	0.73	X	15		2B	182	Random	0.03		$f_r=5.66$	20.86		
1A	44		0.94		10		2B	183	Sin 10 c	0.19		3			
1A	45		0.92		8		2B	184	Random	0.04		$f_r=6.42$	22.81		
1A	46		0.93		5		2B	185	Sin 10 c	0.24		3			
1A	47		0.91		2		2B	186	Random	0.04		$f_r=6.23$	23.25		
1A	48	Sin 10 c	0.79	X	15		2B	187	Sin 10 c	0.29		3			
1A	49		0.99		10		2B	188		0.35					
1A	50		0.99		8		2B	189		0.40					
1A	51		0.99		5		2B	190		0.46					
1A	52		1.01		2	Collapse	2B	191		0.51					
1A	53	Random	0.04	X	$f_r=15.78$	12.36	2B	192		0.61				Part.Col.	
1A	54	Modena eqke	0.36	X			2B	193		0.76				Part.Col.	
1A	55	Random	0.02	X	$f_r=15.39$	12.76	2B	194	Sin 100 c	1.01				Collapse	
1A	56	Mirandola eqke	0.25	X			2B	195	Random	0.04	X	$f_r=7.24$	15.69		
1A	57	El Centro eqke	0.36				1B (by means of 2B)	196		0.04	Y	$f_r=12.65$	10.78		
1A	58		0.69				2B	197	Sin 500 c	0.35	X	3			
1A	59		0.89				2B	198		0.20		3			
1A	60				0.70			Repaired Vault							
1A	61	Sin 10 c	1.10	Y	5		2B	199	Random	0.04	X	$f_r=6.97$	4.51		
1A	62		1.34	Y	5		1B (by means of 2B)	200		0.04	Y	$f_r=13.71$	9.57		
1A	63		1.59	Y	5	Part.Col.	2B	201	Sin 500 c	0.27	X	2.5			
1A	64	Random	0.03	X	$f_r=17.16$	11.18	2B	202	0.19	2.5					

1A	65		0.02	Y	$f_r=17.20$	9.68	2B	203		0.21		2	Collapse
1A	66		0.05		$f_r=15.05$	13.14	2C	204		0.04	X	$f_r=6.29$	13.08
1A	67		0.13		$f_r=12.46$	18.93	1C (by means of 2C)	205		0.04	Y	$f_r=10.54$	10.50
1A	68		0.22		$f_r=10.26$	17.15	2C	206		0.07	X	$f_r=5.40$	13.66
1A	69		0.30	X	$f_r=9.46$	22.69	1C (by means of 2C)	207		0.06	Y	$f_r=9.97$	10.48
1A	70		0.38		$f_r=8.78$	28.91	2C	208		0.12	X	$f_r=4.75$	17.36
1A	71		0.47		$f_r=7.69$	27.02	1C (by means of 2C)	209	Random	0.12	Y	$f_r=8.82$	13.31
1A	72		0.57		$f_r=6.94$	50.54	2C	210		0.18	X	$f_r=3.90$	23.89
1B	73		0.04	X	$f_r=14.95$	11.09	1C (by means of 2C)	211		0.16	Y	$f_r=8.31$	13.86
1B	74		0.03	Y	$f_r=14.84$	11.17	2C	212		0.04	X	$f_r=6.47$	16.22
1B	75	Random	0.07		$f_r=13.46$	13.65	1C (by means of 2C)	213		0.04	Y	$f_r=10.78$	10.22
1B	76		0.14	X	$f_r=11.58$	17.51	2C	214		0.10		50	
1B	77		0.22		$f_r=10.13$	20.09	2C	215		0.10		20	
1B	78		0.04		$f_r=14.83$	11.78	2C	216		0.10		15	
1B	79		0.31		50		2C	217		0.10		10	
1B	80		0.17		20		2C	218		0.10		8	
1B	81		0.20		15		2C	219	Sin 10 c	0.11	X	6	
1B	82		0.24		10		2C	220		0.11		5	
1B	83	Sin 10 c	0.25	X	8		2C	221		0.11		4	
1B	84		0.26		5		2C	222		0.11		3	
1B	85		0.25		3		2C	223		0.11		2	
1B	86		0.26		2		2C	224		0.11		1	
1B	87		0.44		1		2C	225	Random	0.04	X	$f_r=6.45$	20.72
1B	88	Random	0.04	X	$f_r=15.02$	13.25	2C	226		0.29		50	
1B	89		0.53		50		2C	227		0.20		20	
1B	90		0.40		20		2C	228		0.25		15	
1B	91		0.42		15		2C	229		0.25		10	
1B	92		0.48		10		2C	230		0.24		8	
1B	93	Sin 10 c	0.49	X	8		2C	231	Sin 10 c	0.27	X	6	
1B	94		0.52		5		2C	232		0.25		5	
1B	95		0.51		3		2C	233		0.25		4	
1B	96		0.50		2		2C	234		0.25		3	
1B	97		0.50		1		2C	235		0.26		2	Part.Col.
1B	98	Random	0.04	X	$f_r=14.49$	14.20	2C	236	Sin 30 c	0.26		2	Collapse
1B	99		0.84		50		1D (by means of 2D)	237		0.05	Y	$f_r=9.40$	9.49
1B	100		0.66		20		2D	238		0.04	X	$f_r=4.76$	48.79
1B	101	Sin 10 c	0.65	X	15		1D (by means of 2D)	239	Random	0.07	Y	$f_r=8.69$	8.89
1B	102		0.78		10		2D	240		0.07	X	$f_r=4.65$	17.06

1B	103		0.75		8		1D (by means of 2D)	241		0.12	Y	$f_r=7.62$	11.91
1B	104		0.77		5		2D	242		0.13	X	$f_r=3.71$	15.02
1B	105		0.76		3		1D (by means of 2D)	243		0.17	Y	$f_r=6.65$	10.32
1B	106		0.73		2		2D	244		0.18	X	$f_r=3.98$	17.93
1B	107	Random	0.04	X	$f_r=13.83$	14.93	1D (by means of 2D)	245		0.15	Y	5	
1B	108		0.77		5		2D	246		0.11	X	5	
1B	109	Sin 100 c	0.76	X	3		1D (by means of 2D)	247	Sin 10 c	0.14	Y	3	
1B	110		0.03		$f_r=15.16$	14.58	2D	248		0.10	X	3	
1B	111	Random	0.21	X	$f_r=10.51$	36.99	1D (by means of 2D)	249		0.14	Y	2	
1B	112		0.76				2D	250		0.11	X	2	
1B	113		0.76				1D (by means of 2D)	251	Random	0.04	Y	$f_r=10.12$	8.93
1B	114		0.76				2D	252		0.04	X	$f_r=5.57$	12.91
1B	115	Sin 100 c	0.76	X	5		1D (by means of 2D)	253	Sin 10 c	0.08	Y	3	
1B	116		0.77				2D	254		0.06	X	3	
1B	117		0.76				1D (by means of 2D)	255	Random	0.04	Y	$f_r=10.16$	8.83
1B	118		0.76			Collapse	2D	256	Random	0.04	X	$f_r=5.41$	9.23
1B	119	Random	0.04	X	$f_r=14.77$	11.63	1D (by means of 2D)	257	Sin 10 c	0.13	Y	3	
1B	120		0.03	Y	$f_r=14.22$	11.25	2D	258		0.11	X	3	Part.Col.
1B	121	Sin 10 c	0.11	X	3		1D (by means of 2D)	259	Random	0.04	Y	$f_r=9.78$	9.27
1B	122	Random	0.04	X	$f_r=14.90$	11.50	2D	260		0.04	X	$f_r=5.66$	9.07
1B	123	Sin 10 c	0.20	X	3		2D	261		0.15			Part.Col.
1B	124	Random	0.04	X	$f_r=14.85$	11.71	2D	262		0.20			Part.Col.
1B	125	Sin 10 c	0.29	X	3		2D	263		0.25			Part.Col.
1B	126	Random	0.04	X	$f_r=14.87$	11.01	2D	264	Sin 10 c	0.28	X	3	Part.Col.
1B	127	Sin 10 c	0.40	X	3		2D	265		0.34			Part.Col.
1B	128	Random	0.04	X	$f_r=14.62$	12.14	2D	266		0.39			Collapse
1B	129	Sin 10 c	0.51	X	3								
1B	130	Random	0.04	X	$f_r=14.40$	12.03							
1B	131	Sin 10 c	0.60	X	3								
1B	132	Random	0.04	X	$f_r=14.22$	12.31							
1B	133	Sin 10 c	0.69	X	3								
1B	134	Random	0.04	X	$f_r=14.23$	13.29							
1B	135	Sin 10 c	0.81	X	3								
1B	136	Random	0.04	X	$f_r=13.84$	13.06							
1B	137	Sin 10 c	0.92	X	3								



717

1B	138	Random	0.04	X	$f_T=12.63$	13.71							
1B	139	Sin 10 c	1.02	X	3	Collapse							