



## ARCHIVIO ISTITUZIONALE DELLA RICERCA

### Alma Mater Studiorum Università di Bologna Archivio istituzionale della ricerca

Evaluation of the potential performance of hyphenated pyrolysis-anaerobic digestion (Py-AD) process for carbon negative fuels from woody biomass

This is the final peer-reviewed author's accepted manuscript (postprint) of the following publication:

*Published Version:*

Evaluation of the potential performance of hyphenated pyrolysis-anaerobic digestion (Py-AD) process for carbon negative fuels from woody biomass / Torri C.; Pambieri G.; Gualandi C.; Piraccini M.; Rombola A.G.; Fabbri D.. - In: RENEWABLE ENERGY. - ISSN 0960-1481. - ELETTRONICO. - 148:(2020), pp. 1190-1199. [10.1016/j.renene.2019.10.025]

This version is available at: <https://hdl.handle.net/11585/801090> since: 2021-02-18

*Published:*

DOI: <http://doi.org/10.1016/j.renene.2019.10.025>

*Terms of use:*

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

(Article begins on next page)

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).  
When citing, please refer to the published version.

This is the final peer-reviewed accepted manuscript of:

**TORRI, C., PAMBIERI, G., GUALANDI, C., PIRACCINI, M., ROMBOLÀ, A.G., FABBRI, D., 2020. EVALUATION OF THE POTENTIAL PERFORMANCE OF HYPHENATED PYROLYSIS-ANAEROBIC DIGESTION (PY-AD) PROCESS FOR CARBON NEGATIVE FUELS FROM WOODY BIOMASS. RENEWABLE ENERGY 148, 1190–1199.**

The final published version is available online at:  
<https://doi.org/10.1016/j.renene.2019.10.025>

#### Terms of use:

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

*This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>)*

***When citing, please refer to the published version.***

# Evaluation of the potential performance of hyphenated Pyrolysis-Anaerobic Digestion (Py-AD) process for carbon negative fuels from woody biomass.

Cristian Torri\*,<sup>1,2,3</sup> Giampiero Pambieri,<sup>2</sup> Chiara Gualandi,<sup>2</sup> Maurizio Piraccini,<sup>4</sup>  
Alessandro G. Rombolà,<sup>1</sup> Daniele Fabbri<sup>1,3</sup>

<sup>1</sup>Dipartimento di Chimica "Giacomo Ciamician", Università di Bologna

<sup>2</sup>Centro Interdipartimentale di Ricerca per le Scienze Ambientali, Università di Bologna.

<sup>3</sup>Centro Interdipartimentale di Ricerca Industriale Fonti Rinnovabili Ambiente Mare (FRAME) Università di Bologna.

<sup>4</sup>HERA s.p.a.

\**cristian.torri@unibo.it* , 00390544937251, Dipartimento di Chimica "Giacomo Ciamician", Università di Bologna, Via Sant'Alberto 163, 48123 Ravenna (Italy).

## Abstract

A novel hyphenated Pyrolysis-Anaerobic Digestion prototype (Py-AD) was tested in order to evaluate the potential of hybrid thermochemical biological process to produce methane from woody biomass. An auger intermediate pyrolyzer was directly coupled to two biological reactors optimized for the digestion of residual condensable compounds and gas produced by pyrolysis of softwood. The Py-AD was monitored for 16 months and a detailed chemical analysis of the main fractions, gas (pyrobiogas), biochar aqueous phase and pyrolytic lignin was performed under regime conditions. The results from Py-AD and those from experiments with bench-scale pyrolysis and fermentation reactors analysis provided information on the overall performance of the Py-AD and mass and energy balance based on chemical oxygen demand.

Py-AD allowed to obtain, with acceptable volumetric productivity, a pyrobiogas with a composition approaching that of biogas (47 %v/v CH<sub>4</sub> and 45 %v/v CO<sub>2</sub>). Pyrobiogas yield was about half of the theoretical value calculated from gas and liquid fractions. A preliminary technical evaluation of the process confirmed the feasibility of Py-AD and its value to produce carbon negative fuels with simple equipment and low waste generation. Important key constraints of the process were also evidenced in the study.

**Keywords:** Pyrolysis, Anaerobic digestion, Hybrid thermochemical biological, Biomethane, Biogas

## 1. Introduction

34 Slow pyrolysis is one of the virtually simplest transformation of biomass among the various  
35 thermochemical processes (e.g. fast pyrolysis, hydrothermal liquefaction and gasification).  
36 Pyrolysis uses heat in an inert atmosphere without chemical reagents to break down polymeric  
37 feedstock into smaller fragments, forming a vapor stream that is cooled down into two fractions: a  
38 non-condensable gas and a liquid (named pyro-oil or bio-oil, formed by water and organic  
39 substances). A solid residue (named char or biochar) is also formed by pyrosynthesis and  
40 carbonization. Therefore, pyrolysis gives a fast and technically simple chemical deconstruction of  
41 biomass and transfers the largest part of feedstock energy into gas and liquid, with contemporary  
42 production of carbon rich residue that can be directly applied to soil as biochar.

43 Intermediate or slow pyrolysis (temperature of 400-500°C and reaction time longer than 1 min)  
44 yields char (20-30%), gas (10-20%) and 50-60% w/w of a pyrolysis liquid with relatively high  
45 water content (about 50% w/w).[1,2] These systems require quite a low heating rate that can be  
46 easily obtained with technically simple equipment, like auger reactors. Although a large portion of  
47 chemical energy is retained by biochar, its use for carbon storage in soil amendment enables the  
48 production of energy/fuels with negative CO<sub>2</sub> emissions. [3] Gas contribution increases by catalysis  
49 and higher vapor residence time, when secondary cracking reactions become relevant.[4,5]

50 Condensable substances can be subsequently categorized into water soluble low molecular weight  
51 organics (semi-volatiles), high molecular weight organics (oligomers), and water insoluble  
52 organics, the latter consisting by definition of pyrolytic lignin.[6] It is worth to notice that pyrolysis  
53 gas and water soluble substances can be used as substrates in anaerobic digestion (AD), [7-12]  
54 producing a biogas that can be easily used in internal combustion engines,[13] as well as upgraded  
55 to methane (CH<sub>4</sub>) usable as a drop in fuel.[14] This finding has recently suggested the concept of  
56 “hybrid thermochemical-biological process”, in which thermochemical treatments enhance the  
57 bioavailability of organic substrates towards anaerobic digestion for their conversion into biogas (a  
58 mixture of CH<sub>4</sub> and CO<sub>2</sub>).[15-17] This approach is of particular interest to the aim of converting the  
59 fraction of biomass that is highly refractory to fermentation into biogas. In fact, this fraction  
60 represents the hurdle to the utilization of woody biomass for the production of biogas. Therefore,  
61 this hybrid approach can be envisaged as a suitable way for producing a biofuel with negative  
62 emission of CO<sub>2</sub> assisted by the co-production of biochar as carbon sequestering agent. In general,  
63 the two treatments (pyrolysis and anaerobic digestion) are coupled in an “off-line” configuration in  
64 which products are separately collected in the first treatment (pyrolysis, Py) and thereafter send to  
65 the second one (anaerobic digestion, AD).[18] To the best of our knowledge, the potential of an  
66 “on-line” configuration in which pyrolysis and anaerobic digestion are directly interfaced (as  
67 symbolized by the hyphen) has never been investigated on a relatively high scale (kg h<sup>-1</sup>). To the

purpose of shading light on the technical feasibility of the process, advantages and constraints of Py-AD, in this paper data from laboratory scale experiments were collected and used to set up the first working Py-AD prototype. The Py-AD prototype was applied to the pyrolysis of a softwood biomass; non-condensable gas and water-soluble fractions were the feed of two in series AD reactors monitored for the production of biogas. Biochar and pyrolytic lignin were also collected and analyzed. The obtained data enabled a preliminary energy balance of the Py-AD.

## 2. Material and Methods

### 2.1 Bench scale pyrolysis of biomass for conditions selection

Commercial pine wood pellets with 2% humidity were used as feedstock for the experiments. This feedstock had the following ultimate analysis (on dry weight basis):  $47.5 \pm 2\%$  C,  $5.5 \pm 1\%$  H,  $46.6 \pm 5\%$  O, and 0.4% ash. In bench scale pyrolysis experiments, about 5 g of biomass sample were pyrolyzed at 400, 500 and 650°C for a set time (2, 4, 8 and 16 min) in a fixed bed quartz reactor at a heating rate of about  $100\text{ }^{\circ}\text{C min}^{-1}$  by an electrically heated furnace described in detail elsewhere. [19] The sample was inserted in the heated zones and here maintained for the set time. During pyrolysis, pyrolysis vapors were swept by  $1\text{ L min}^{-1}$   $\text{N}_2$  flow to a room temperature empty trap (25°C), followed by trapping into 10 mL acetone (0 °C). The amount of char produced was measured as the weight of the solid material still present at the end of the pyrolysis run. At the end of pyrolysis, the acetone solution of the second trap was evaporated under  $\text{N}_2$  overnight. The residue was added with distilled water (1:10), sonicated and settled overnight. Thereafter, the aqueous solution that includes the non-volatile portion of aqueous pyrolysis liquid (APL) was removed and the water insoluble fraction was dried to remove residual water. The dried water insoluble residue was named as “water insoluble” portion of pyrolysis oil (WI), weighted and subjected to elemental analysis to obtain the theoretical oxygen demand (ThOD, see section 2.4). ThOD of pyrolysis products that can be subjected to fermentation was calculated by difference from the initial chemical oxygen demand (COD) of the feedstock, ThCOD of biochar and ThCOD of WI.

### 2.2 Py-AD system

The Py-AD plant description is shown in Figure 1. Pyrolyzer (Py) consisted in a single screw auger reactor (stainless steel, AISI 321).[20] The pyrolysis reactor had an external diameter of 114 mm, 6 mm thickness and a length of 1350 mm. The central part of the system was equipped with 4 electric jackets (total power 4 kW) that maintained the external temperature of the heated zone measured at the top of the pyrolysis chamber at the set value of 400°C for a length equal to 600 mm. By considering that the electric jackets heated up from the bottom, this corresponded to a maximum

102 measured temperature of about 500°C at the bottom of the reactor. The motion was applied by  
103 means of an electrical engine that moved the shaft with 1 rpm angular speed acting intermittently to  
104 have the set biomass flow rate (1 kg h<sup>-1</sup>). A flow of N<sub>2</sub> at 0.1 L min<sup>-1</sup> was provided for safety  
105 reasons nearby the airlock shaft coupling. The reactor was coaxially attached to a U-tube heat  
106 exchanger (stainless steel, AISI 304) and biomass/biochar flowed by means of two opposite radial  
107 openings for entrance of biomass from airlock feed, and biochar discharge opposed to shaft  
108 coupling. The heat exchanger receiving the volatile pyrolysis product stream was connected to two  
109 anaerobic digesters in series (reactor R1 and R2) by means of 23 mm ID silicone flexible hose pipe.  
110 Pyrolysis liquid condensate flowed spontaneously into the bottom part of the U-tube heat exchanger  
111 and was recovered, on daily basis, from a manual valve. The system was optionally used as  
112 standalone pyrolyzer (Py) for comparison with Py-AD by means of a bypass valve, which swept the  
113 pyrolysis gas directly to the flare. In this configuration, a peristaltic pump was used to withdraw the  
114 pyrolysis liquid from the bottom of heat exchanger and injected it, through a 5 mm ID dish nozzle,  
115 in the top of the same heat exchanger.

116 The residence time in the heated zone was set to 30 min and the biomass feed rate to 1 kg h<sup>-1</sup>. The  
117 U-Tube heat exchanger cooled down the pyrolysis products to 60°C, causing the condensation of  
118 the liquid product, that was collected from the basis of the exchanger. The incondensable products  
119 and residual aerosols were bubbled in the first biological reactor (R1, CSTR reactor) by means of a  
120 25 mm OD inch silicone flexible pipe, 600 mm below the liquid level. R1 consisted in an insulated  
121 vertical tank with a total volume of 450 L (600 mm diameter), filled with 300 L of liquid (inoculum  
122 and water) and with a 150 L empty gas dome. The inoculum was a mesophilic anaerobically  
123 digested excess sludge from a wastewater treatment plant (Hera s.p.a) located in Forlì (Emilia-  
124 Romagna region, Italy), with 35 g L<sup>-1</sup> of volatile suspended solids (VSS). R1 was kept at 45°C by  
125 means of auxiliary resistances. A recirculating gas-blower drew the gas from the dome and injected  
126 it in the bottom of the R1 through a polypropylene sponge with 5-10 mm porosity. This created  
127 bubbles with 10-20 mm diameters and concurrently provided mixing of R1. To avoid excessive  
128 formation of foam, 10 mL of sunflower oil per week were added as anti-foam agent.

129 Produced/converted gas from R1 was injected into the top of the second biological reactor (R2)  
130 proceeding downward into R2. Gas from the R2 exits 300 mm from the bottom of the same, which  
131 is connected, by means of flexible hose, to a gas holder and, a gas meter. R2 was designed  
132 according to Burkhardt *et al.* (2015), with slight modifications. [21] Briefly it consisted in a 350 L  
133 trickled bed reactor, namely a tank filled with 300 L of random fill high surface media (140 m<sup>2</sup>/m<sup>3</sup>)  
134 and 50 L of liquid. The trickling bed is kept wet by means of a progressing cavity pump that  
135 pumped liquid digestate from the bottom of R2 to the top of the same through a deflector plate

136 nozzle. The Py-AD system was controlled by an Arduino MEGA board, which activated the plant  
137 items as a time based sequence. Due to different size of Py and AD system, the Py throughput  
138 capacity was higher than that needed for feeding AD system, therefore Py worked in pulsed mode  
139 and AD in continuous regime. Therefore, during regime operations, the pyrolyzer worked 1 h every  
140 day at noon, providing a feed rate equal to  $1 \text{ kg day}^{-1}$ , whereas the AD blowers and recirculation  
141 pumps operated every hour for 5 min. This provided an adequate mixing of R1 and an adequate  
142 trickle bed wetting in R2.

143

### 144 ***2.3 Anaerobic digestion of aqueous condensed phase***

145 Samples of the liquid product from Py-AD were recovered at the bottom of the condenser with a  
146 manual valve. The samples consisted of a biphasic liquid, namely an organic rich bottom phase and  
147 an aqueous upper phase, with few droplets on the top (extractives). This mixture was settled into a  
148 separator funnel for 4 h to obtain a clear phase separation. The bottom phase, mainly consisting in  
149 pyrolytic lignin and other water insoluble products, was recovered and analyzed. The upper aqueous  
150 phase of pyrolysis liquid (APL) was analyzed and subjected to anaerobic digestion in an upflow  
151 anaerobic sludge blanket reactor (UASB) shown in Figure 2. The UASB consisted in an 80 mL  
152 reactor, kept at  $40^{\circ}\text{C}$  and equipped with an inlet at the bottom and an outlet on the top of the  
153 reactor. The reactor was initially filled with inoculum (see section 2.2) and 8 g of grinded biochar  
154 sampled from that obtained from Py-AD pilot plant experiments described above. A peristaltic  
155 pump was used to inject APL in anaerobic reactor at set rate. For technical reasons, APL was  
156 provided as several pulses of 0.2 min providing 0.2 mL of liquid per pulse with daily rate in the  
157 range of  $0\text{--}1 \text{ mL day}^{-1}$ . Due to extremely high C/N ratio of APL, additional 1 mL per week of  
158 inoculum was added to provide a nitrogen supplementation to the microbial consortia. Mixing of  
159 the system was obtained by another peristaltic pump taking the liquid from the top of the reactor (10  
160 mm below the reactor roof) and pumping it in the reactor inlet with a pumping rate equal to  $10 \text{ mL}$   
161  $\text{h}^{-1}$ . The outlet of reactor was connected to a Supelco Inert Foil Gas sampling bag used for collecting  
162 both biogas and liquid digestate by means of tygon® tubing. Every 2 d, the bag was emptied,  
163 measuring the gas and liquid content. The liquid digestate and biogas were analyzed as described in  
164 the following section.

165

### 166 ***2.4 Analysis of gas, aqueous phases and water insoluble phase***

167 Concentration of  $\text{H}_2$ ,  $\text{CH}_4$ ,  $\text{CO}_2$  in biogas and CO in pyrolysis gas determined by GC-TCD 7820A  
168 (GC system, Agilent Technologies) using three packed columns placed in series (HAYASEP 80–  
169 100 mesh HAYASEP 0 80–100 mesh, and MOL SIEVE 5A 60–100 mesh (Agilent Technologies))

with the following thermal program: 9 min at 50 °C, then 8 °C min<sup>-1</sup> to 80 °C. Quantitation was performed using the calibration mixture Scotty Analyzed Gases Supelco, Sigma-Aldrich. The determination of volatile fatty acids (VFAs) in WI, APL and liquid digestate was performed by solvent extraction and GC-MS analysis following the analytical method developed by Ghidotti *et al.*[22] The analytical characterization of WI and APL was performed following the solvent fractionation procedure and analysis described in Busetto *et al.* (2011).[23] Elemental analysis (C, H, and N) was performed using a Thermo Fisher Elemental Analyzer (Flash 2000), configured for solid samples with a copper/copper oxide column and calibrated with 2,5-bis(5-*tert*-butyl-2-benzoxazol-2-yl) thiophene (BBOT). The quantitation of GC-MS detectable organics in APL, WI and liquid digestate was performed after water evaporation, trimethylsilylation and GC-MS analysis following the procedure described in detail elsewhere. [24] The theoretical oxygen demand (ThOD, gCOD g<sup>-1</sup>), accordingly to OECD guideline 301F, [25] was calculated from elemental analysis using the following formula:

$$\text{ThOD} = 16 \cdot ((2 \cdot \text{C}/12 + \text{H}/2 + 2 \cdot \text{S}/32 - \text{O}/16 - 3 \cdot \text{N}/2)$$

COD yield, namely the percent amount of ThOD of the feedstock transferred to certain Py-AD product was calculated with the following formula:

$$\text{COD yield} = \text{ThOD yield} = Y_i \cdot \text{ThOD}_i / \text{ThOD}_{\text{feedstock}}$$

Where  $Y_i$  is the mass yield (kg/kg<sub>feedstock</sub>) of a product and  $\text{ThOD}_i$  is the chemical oxygen demand of the product (gCOD g<sup>-1</sup>). COD yield of digestate in Py-AD was obtained by difference between 100% and the sum of COD yield of pyrobiogas, char and liquid product.

## 3. Results and discussion

### 3.1 Bench scale pyrolysis tests

To better understand the intrinsic constraints of a Py-AD approach based on intermediate pyrolysis, some preliminary bench scale tests were targeted to the evaluation of maximum amounts of chemical energy released as bioavailable products, namely water-soluble pyrolysis products and pyrolysis gas. The Chemical Oxygen Demand (COD, gO<sub>2</sub>/g<sub>substrate</sub>) is a way to measure the energy stored in chemical substances, and can be directly translated into a theoretical biomethanation potential. On the basis of stoichiometry and high heating value (HHV), empirical calculations show that 1 kg of COD stores about 15 MJ energy, and the anaerobic digestion of 4 kg of COD as organic matter is required to obtain 1 kg of methane. Figure 3 shows the COD balance of intermediate pyrolysis performed with reactor temperature between 400 and 650°C and time ranging between 2 and 16 minutes. With the exception of torrefaction-like conditions (short pyrolysis time and low



temperature), which released a negligible amount of COD into non-solid fraction, the amount of COD that was transferred to fermentable products, namely the aqueous phase and pyrolysis gas, represented about an half of the chemical energy of the feedstock and remained almost constant. Comparing the data of intermediate pyrolysis with data from the large literature concerning fast pyrolysis (Figure 3), it appears that a “complete” pyrolysis produces a roughly similar yield of bioavailable compounds, corresponding to 40-60% of chemical energy of the feedstock. Considering the trade-off between operational advantages (e.g. lower temperature) and almost comparable yield of substances amenable to anaerobic fermentation, the Py-AD system was designed to operate at a set temperature of 400-500°C.

213

### 214 ***3.2 Py-AD prototype***

#### 215 ***3.2.1 Set up and preliminary experiments***

216 Construction of prototype was performed with standard industrial equipments in order to obtain a  
217 scalable system suitable to be replicated. The system was improved over time in order to increase  
218 its performance. The basic elements of the systems were the pyrolyzer (Py) an heat exchanger at  
219 60°C, used to remove a portion of heaviest part of pyrolysis liquid (e.g. water insoluble fraction)  
220 and one or two anaerobic reactors (R1 and R2). The initial Py-AD included a pyrolysis reactor, a  
221 heat exchanger and one biological reactor. In this configuration the pyrolyzer just bubbled the raw  
222 pyrolysis vapours (upon cooling) at the bottom of an anaerobic digester (R1). Such a system  
223 typically produced a gas almost unconverted and still rich in aerosols. Therefore, in a second  
224 configuration a trickled bed reactor (R2) was added in order to remove aerosols. R2 was filled with  
225 high surface spherical elements ( $140 \text{ m}^2/\text{m}^3$ ) for biofilm formation. This configuration allowed the  
226 removal of all aerosols from raw pyrolysis gas and provided a significant digestion of non-  
227 condensable pyrolysis gases (NCG). Py-AD was finally improved by inserting a system for the  
228 recirculation of raw pyrolysis gas into R1 in order to provide adequate mixing of the anaerobic  
229 digester. This last configuration, which consisted of a Py with heat exchanger connected to a 300 L  
230 CSTR with gas recirculation in turn connected to a 300 L trickled bed reactor (Figure 1) was used  
231 for acclimatization and to observe the performance for pyrolysis gas conversion. The first part of  
232 the study was performed on the raw pyrolysis gas, discarding the pyrolysis liquid produced. Several  
233 preliminary test were performed by pyrolyzing, in discontinuous mode, about 1 kg in 1 test per  
234 week. During these preliminary tests the the Py system was run for 1 hour and switched off,  
235 keeping the AD part on (blowers and recirculation pump). After this, the concentration of gas  
236 constituents was measured over time, providing a conversion rate of gas (Figure 4) at different time  
237 after system startup. During the initial phase of the study, a low conversion of pyrolysis gas/volatile

products were observed, in accordance with previous literature data.[7,10] The ratio between gaseous constituents of biogas ( $\text{CH}_4$  and  $\text{CO}_2$ ) and “pyrogenic” gases ( $\text{H}_2$  and  $\text{CO}$ ) increased over time reaching a plateau after 120 days. After 120 days, although a residual amount of  $\text{H}_2$  and  $\text{CO}$  was present, the composition gas produced was close to that of biogas.

The increase of gas conversion rate took more than 4 months and was slower than what observed in previous studies that occurred in few weeks; [7] this can be attributed to the need of active biofilm growth in R2. The conversion rate observed after 120 days was equal to  $2.7 \text{ Nm}^3 \text{ m}^{-3} \text{ d}^{-1}$  for biogas and  $1.4 \text{ Nm}^3 \text{ m}^{-3} \text{ d}^{-1}$  for biomethane. This value falls in the middle of the volumetric productivity in literature, which shows a large productivities range between  $0.1 \text{ Nm}^3 \text{ m}^{-3} \text{ d}^{-1}$  and  $7 \text{ m}^3 \text{ m}^{-3} \text{ d}^{-1}$  .[28]

Although the system used here includes a bubbled reactor (R1) and trickle bed reactor (R2), observed value is close to what observed with trickle bed reactor with similar specific surface area, namely  $1.5 \text{ Nm}^3 \text{ m}^{-3} \text{ d}^{-1}$  obtained by Burkhardt *et al.*,[21] with mixed inocula, on  $\text{H}_2/\text{CO}_2$  mixtures and  $1.6 \text{ Nm}^3 \text{ m}^{-3} \text{ d}^{-1}$  obtained by Klasson *et al.* using a triculture onto syngas.[29]

251

### 252 3.3.2 Continuous test

After having reached the system stability, the input rate of the system was increased to  $1 \text{ kg h}^{-1}$ , using this regime conditions for one month. During this time, conversion performances and overall yields was measured. Figure 5 shows the composition of gas during regime operations. After increase of input rate of feedstock, a significant increase of  $\text{CO}$  and  $\text{H}_2$  concentrations were observed suggesting an incomplete conversion of incoming pyrolysis gas until day 4. This decrease in conversion rate was accompanied by an increase in VFA concentration in the R1 from 0.4 baseline to  $0.95 \text{ g L}^{-1}$  in the first 6 days (Figure 6). This increase in VFA concentration was not observed in R2, in which VFA concentration fell below  $0.3 \text{ g L}^{-1}$  for all the duration of the study. After that, the concentration of pyrogenic gas, showed a variable trend until the day 14. After day 14 the gas composition was dominated by  $\text{CH}_4$  and  $\text{CO}_2$  with minimal amount of  $\text{CO}$  and  $\text{H}_2$ . This trend suggests an adaptation of the microbial consortia to the organic load applied. The initial unbalance mainly involved R1, and therefore could be related to increased load of residual condensables of raw pyrolysis gas, which mainly involved R1. Nonetheless, the overall trend observed suggested that the co-digestion of all raw pyrolysis gas constituents (including semi-volatile constituents) can be feasible with an adapted microbial consortia.

268

### 269 3.3.3 Mass and energy balance. Comparison with Py

In order to obtain the net effect of AD on pyrolysis products, a comparison between Py and Py-AD was performed. In order to improve the collection of the liquid in the heat exchanger, the Py system

272 was slightly modified by using the pyrolysis liquid as scrubbing agent. The purpose of this  
 273 implementation was that to obtain a pyrolysis gas with a low content of residual aerosols  
 274 comparable with that observed for Py-AD. The Py test was performed for 8 h test in which the  
 275 various fractions were collected and analysed. Overall yields, on mass basis and COD basis,  
 276 obtained by Py and Py-AD tests are shown in Table 1. The biochar yields resulted identical in both  
 277 systems, confirming the replicability of Py. The standalone Py yielded 28% kg/kg<sub>wood</sub> of a biochar  
 278 with the following elemental composition 77±3% carbon, 2.5±0.5% hydrogen, 19±3.5% oxygen  
 279 and 1.4 ±0.5% ash (mean ± standard deviation, n=5). Under these conditions, the liquid product  
 280 yields of Py was 63% kg/kg<sub>wood</sub> (17% organic fraction and 83% water phase) and gas yield was 9%  
 281 kg/kg<sub>wood</sub>. Data are in accordance with the literature concerning slow/intermediate pyrolysis of  
 282 wood in comparable reactors.[5,2] The coupling with of AD changed deeply the volatile/gas  
 283 product distribution of Py of wood. Py-AD yielded less liquid, namely 28% kg/kg<sub>wood</sub> , with  
 284 concurrent increased production of pyrobiogas 19% kg/kg<sub>wood</sub> and a relevant production of digestate  
 285 reach in water. Stoichiometry of CO conversion, which involve increase in biogas mass through  
 286 water-gas shift, partially explain this increase of gas yield. In addition, significant portion of  
 287 pyrolysis water and volatile organics (e.g. acetic acid) that were condensed in Py alone  
 288 configuration were probably transferred in the AD. These organics were converted to gas or  
 289 transferred to digestate when Py-AD configuration is used. Gas produced by means of intermediate  
 290 Py were mainly formed by CO (62% v/v) and CO<sub>2</sub> (24% v/v) with minimal amount of CH<sub>4</sub> and H<sub>2</sub>  
 291 (11 and 2% v/v respectively), with composition comparable to that reported in literature for  
 292 intermediate/slow pyrolysis with low reaction temperature.[30] Gas produced by Py-AD system  
 293 showed an average composition that is similar to that of biogas with increased content of CH<sub>4</sub> and  
 294 CO<sub>2</sub> (47.4% v/v and 44.6% v/v respectively), decreased content of CO (6.7% v/v) and comparable  
 295 concentration of H<sub>2</sub>. This change in composition was similar to that observed in studies focused on  
 296 syngas biomethanation,[7] and confirms the biological conversion of both gaseous and semi-volatile  
 297 products that reach the AD system.

298 From the point of view of chemical energy, it is useful to look at the COD balance of Py and Py-AD  
 299 (right part of Table 1). At 400°C Py and Py-AD, 52 % of the feedstock chemical energy and 46±2%  
 300 of the feedstock carbon are driven to biochar. This is in line with bench scale experiments and  
 301 match with literature concerning slow/intermediate pyrolysis of wood. For 400°C Py most of the  
 302 remaining chemical energy ended up in liquid fraction (39% of the feedstock COD) and gas (mainly  
 303 formed from carbon dioxide and carbon monoxide) retained a minimal amount of initial energy.  
 304 Such energy distribution observed is in line with that of literature for slow pyrolysis at low  
 305 temperature (450°C).[5,31]

When the raw pyrolysis products were just cooled down to 60°C and directly injected into AD, Py-AD drastically increased the COD yield of gas by a factor three, with a pyrobiogas yield that retained 21% of the initial COD of the feedstock. The difference between input and output of COD was different between both Py (4.4% losses) and Py-AD (13%).

In the Py case, the amount of losses can be attributed to the small amount of oxygen present in the technical grade purge nitrogen (99%), used for safety purpose, and incomplete collection of non-gaseous constituents, namely aerosols. In the case of Py-AD the gas was clear and without significant amount of aerosol, and therefore the COD balance observed is probably due to an incomplete conversion of the pyrolysis products as well as bacterial growth. For Py-AD, the increase in losses (from 4.4 to 13% of feedstock COD) is opposite to the change of the COD yield observed for organic fraction of liquid, which decreases from 14 to 4.5 %. In this case the expected amount of COD converted to bacterial biomass should be well below 2%, [32] this could suggest that the organic fraction of pyrolysis liquid, although transferred to R1, is not converted effectively by the AD.

320

**Table 1:** comparison of mass and chemical energy yield in Py and Py-AD.

322

	% w/w <sub>feedstock</sub>		% COD/COD <sub>feedstock</sub>	
	Py	Py-AD	Py	Py-AD
<b>biochar</b>	28	28	52	52
<b>aqueous phase</b>	53	28	26	10
<b>organic fraction</b>	11	4.0	14	4.5
<b>digestate and losses*</b>	1.0	16	4.4	13
<b>gas</b>	7.0	24	3.6	21
$H_2$	0.01	0.03	0.1	0.2
$CH_4$	0.4	6.2	1.7	20
$CO_2$	2.4	16	0	0
$CO$	4.0	1.5	2.3	0.7
$C_nH_m$	0.1	-	0.4	-

\*includes the net balance between pyrolytic water transferred to AD and evaporation from digesters.

325

### 3.3 Anaerobic digestion of Aqueous Pyrolysis liquid (APL)

As previously mentioned, Py-AD involves the conversion of NCG and the part of semi-volatile compounds that are transferred to R1. The part of pyrolysis liquid that were collected in the heat exchanger, was recovered and subject to characterization. This pyrolysis liquid was made by an

aqueous phase (APL, 87% w /w, average of all the tests) and an organic (<10% water content) bottom phase (WI, 13% w/w) with minimal amount of extractives (<1% w/w). The relative composition of the phases was relatively constant with average relative standard deviations of the above reported values less than 5%. APL from Py-AD was mainly formed by 80% w/w water and 8% w/w pyrolytic “sugars”. APL contained about 2%w/w VFA (mostly acetic acid) and minimal amount of phenols, which probably were partitioned to WI. Organics content and VFA concentration in APL from Py-AD were lower than the literature related to intermediate pyrolysis for wood.[23,33,34] This is probably due to low temperature pyrolysis (400°C) and specific reaction configuration, that imply a relatively low recovery of more volatile pyrolysis products (VFA or alcohols), which on the opposite were deliberately transferred to the AD system. This phenomena could be one of the source of biogas produced by Py-AD (see above in section 3.2). As far as the organic bottom phase is concerned, this portion of pyrolysis liquid was subjected to solubilization test in order to establish residual solubility in water, analyzed by elemental analysis, GC-MS, derivatization/GC-MS and Gel Permeation Chromatography. Even if diluted to less than 1 g L<sup>-1</sup> concentration, WI showed a negligible (<10%) solubilization in water. Moreover, the chemical analysis indicated that WI was mainly formed by phenols and lignin oligomers, with a significant amount of polycyclic aromatic hydrocarbons (PAHs, 120 mg kg<sup>-1</sup>) and quite low (<2%) content of water soluble pyrolysis products. The composition of both APL and WI suggested a large partitioning of organic compounds on the basis of water solubility. Analysis showed an almost complete partition of hydrophobic constituent, namely lignin oligomers and PAHs, in the WI and partition of VFA and sugar like, which are potentially biodegradable compounds, in the APL. According to composition and expected chemical behavior of the two liquid fractions obtained by pyrolysis, namely APL and WI, it can be concluded that APL can be, in principle, considered a good feedstock for biological valorization. In fact, it was previously demonstrated that using a portion of biochar produced in the AD it is possible to overcome the toxicity of APL.[10] On the opposite, the relative low yield of WI, that concentrates several compounds with potential concern for biological valorization, suggests higher suitability of different applications. Although APL could be potentially digested directly in on-line Py-AD the further optimization of Py-AD system needs to know exactly the maximum organic loading rate and yield for each fraction (e.g. gas, volatile compounds and APL) and to perform a longer test for establishing potential long term inhibition due to heavy constituents of APL. Therefore, a small scale AD system for APL was set up on and monitored. The system was made by an 80 mL Upflow Anaerobic Sludge Blanket (UASB) and was described in detail in section 2.3 and in Figure 2. Besides APL and inoculum, the system was added with biochar in order to minimize the toxic effect of APL, as shown in previous

364 study.[10] The trend of input and outputs expressed in mg of COD observed in experiments are  
 365 presented in Figure 7. At the beginning of the experiment a spike in the biogas production was  
 366 observed ( $> 100\%$  of input COD) probably due to the residual activity of the inoculum and  
 367 degradable organics adsorbed of biochar. After 20 days, the Organic Loading Rate (OLR) of the  
 368 reactor was increased from  $0.25 \text{ gCOD L d}^{-1}$  to  $1.25 \text{ gCOD L d}^{-1}$ . This change resulted in an  
 369 acceptable conversion of APL into biogas, with negligible VFA production. After a further increase  
 370 in OLR from  $1.25 \text{ g L d}^{-1}$  to  $2.5 \text{ g L d}^{-1}$  the absolute production of biogas remained rather stable,  
 371 whereas the concentration of VFA in the effluent increased significantly. To the purpose of  
 372 avoiding the collapse of the AD, the OLR was switched back to  $1.25 \text{ gCOD L d}^{-1}$ . This  
 373 demonstrated that the maximum OLR that can be reached without long term intoxication. This  
 374 value was actually less than half than that previously obtained for APL from bench scale pyrolysis  
 375 corn stalk.[10] This could be due to difference in feedstock (woody vs herbaceous biomass) or to  
 376 the fact that Py-AD, as demonstrated above, produced an APL that was depleted in some of the  
 377 easily biodegradable compounds (e.g. VFAs) produced by pyrolysis. Nonetheless, the maximum  
 378 OLR achieved suggested that, in order to simplify the process scheme, APL can be coprocessed in  
 379 the proposed Py-AD, just by adding biochar in R1 and without large increase of the volume of R1.  
 380 In order to establish, for the first time, the actual anaerobic biodegradability of pyrolysis products,  
 381 chemical analysis of input and output of the AD was performed. The results of GC-MS analysis of  
 382 some relevant compounds showed that for all the duration of the study at any ORL tested, the  
 383 degradation of was almost complete (Table 2). At the end of the experiment, an average degradation  
 384 rate of key compounds in the APL was estimated (Table 2). Most of the APL pyrolysis products  
 385 are degraded effectively under the conditions of this study, but the rate of degradation was larger for  
 386 carbohydrate derivatives and for compounds with natural analogs (carboxylic acids). On the  
 387 opposite, substituted phenols (e.g. catechol and methyl-catechols) resulted refractory, with half life  
 388 more than 20 days and significant accumulation in the system in the late part of the study.  
 389 The overall biogas yield of the test starting from 20<sup>th</sup> day to the end of the experiment, was 34% of  
 390 the fed COD, with a co-production of 18% yield as VFAs. This means that, under the conditions  
 391 studied here, 52 % of APL was potentially biodegradable under anaerobic conditions. This figure is  
 392 in line with previous studies on AD of APL from slow pyrolysis.[7,15]  
 393 It is interesting to notice that when the ORL exceeded the  $1.25 \text{ gCOD L d}^{-1}$  value the system still  
 394 biodegraded more than half of the COD of APL, but was producing more VFA instead of biogas. In  
 395 conclusion, the residual APL produced by Py-AD presented two main critical issues for AD. One is  
 396 the the toxicity of the mixture, which was experimentally observed in the middle timespan of the  
 397 AD experiment. This toxicity could be attributed to trace compounds that are highly toxic to

methanogenic archaea or to matter that is non-detectable by GC-MS (e.g. formic acid, oligomers or trace metals from the alloys used for Py-AD). This problem could be circumvented by means of process intensification adopting a multi-stage AD system are used or if product different from biogas could be produced from VFA (e.g. concentrated VFA, polyhydroxyalkanoates or bio-electricity with microbial fuel cell).[35] The other relevant critical issue of APL is that about 45% of the APL carbon was not degradable under the conditions used here. This value corresponded to 3.6% of the COD of the initial biomass, therefore it is not highly relevant for the efficiency of the overall Py-AD system. Nonetheless, these non-negligible constituents will end up in the wastewater streams generated by Py-AD and, consequentially they should be treated in some way (e.g. concentrated and fed back to the Py, or oxidized by chemical means).

**Table 2:** degree of biodegradation of main APL constituents detected by GC-MS after silylation of AD effluent.

	% degraded	$K_{deg}$ ( $d^{-1}$ )	$t_{1/2}$ of Py product in AD (d)
1,6-anhydro- $\beta$ -glucopyranose	100%	0.19	3.7
1,4-anhydro- $\beta$ -arabinopyranose	100%	0.19	3.7
hydroxyacetic acid	91%	0.17	4.1
3-methoxy-4-hydroxy-benzene	87%	0.16	4.3
1-methyl-catechol	71%	0.13	5.2
benzoic acid	32%	0.06	12
3,4-hydroxyhydrocinnamic acid	27%	0.05	14
catechol	11%	0.02	34

### 3.4 Overall performance of Py-AD

Data obtained from experiments were used to calculate the expected overall performance of a Py-AD process finalized to produce biochar and methane enriched fuels. Figure 8 shows the energy balance of Py-AD expressed as  $J/J_{feedstock}$ . As a whole, Py-AD is schematized as a functional element that converts feedstock chemical energy, set equal to 100%, uses high temperature heat ( $>400^{\circ}C$ ) which is degraded to low temperature ( $<60^{\circ}C$ ) heat, and produces an array of products whose sum is roughly equal to the chemical energy of the feedstock used. The system tested here converts half of energy into a biochar, one third into pyrobiogas and about 5% into a water insoluble organic liquid (WI). Due to conversion of the raw pyrolysis gas and of the most volatile part of condensable pyrolysis products, the gas produced by the Py-AD system is significantly higher than that produced by low temperature pyrolysis and close to the yields obtainable by carbonization at temperature  $>450^{\circ}C$ . [5]

Py-AD processing of  $1 \text{ kg h}^{-1}$  of wood ( $1.2 \text{ kgCOD h}^{-1}$  corresponding to  $5.1 \text{ kW}$  energy input), produces  $0.3 \text{ kgCOD h}^{-1}$  as pyrobiogas ( $1.3 \text{ kW}$ ). If burnt into an engine this would provide  $0.35\text{-}0.4 \text{ kW}_{\text{el}}$  and  $0.5\text{-}0.6 \text{ kW}_{\text{th}}$  power. In order to establish the technical feasibility of a small-scale Py-AD system, a preliminary evaluation of energy requirement of the process can be performed on the basis of the  $1 \text{ kg}_{\text{wood}} \text{ d}^{-1}$  operation. Excluding the time needed for heating up the reactor, the power consumption of  $1 \text{ kg h}^{-1}$  Py was around  $300\text{-}400 \text{ W}$ . This means that the heat needed for pyrolysis is equal to  $1.1\text{-}1.4 \text{ MJ/kg}_{\text{biomass}}$ . This energy corresponds to  $6\text{-}8\%$  of the calorific value of the biomass pyrolyzed ( $17.9 \text{ MJ/kg}$ ) and  $20\text{-}30\%$  of the energy of pyrobiogas. Despite the low yield of the process, this value is significantly lower than that reported for fast pyrolysis, probably due to low temperature, low heating rate and a certain degree of exothermicity of slow pyrolysis of pelletized biomass.[33] By measuring the difference in temperature of the cooling water used in heat exchanger, it was possible to estimate that a large portion ( $>85\%$ ) of the energy used in pyrolysis can be recovered as sensible and latent heat at  $60^{\circ}\text{C}$  in the heat exchanger. This would suggest again that the slow pyrolysis reaction itself was not endothermic and most of the heat requirement was sensible heat and latent heat of evaporation. From a practical point of view, this heat could be recovered, with high efficiency, to provide the low temperature heat needed to keep reactor warm in cold climates. Main implications of this observation is that, given that the pyrolysis vapours are provided to the biological reactors at temperature slightly higher than  $60^{\circ}\text{C}$ , it is possible to be confident that all the low temperature needs (biological reactors heating) of Py-AD can be fulfilled with waste heat from Py without additional energy input.

Given that biological process has lower volumetric productivity than chemical reactors, another important point for hybrid thermochemical-biological system reliability is the space requirement for anaerobic digester. Extrapolating the results presented here, the size of anaerobic digester needed for stable Py-AD of  $1 \text{ kgCOD}_{\text{feedstock}} \text{ d}^{-1}$  should be around  $0.25 \text{ m}^3$  for digestion of raw pyrolysis gas and  $0.1 \text{ m}^3 \text{ d}$  for stable digestion of APL produced. This means that, on a conservative basis, a pyrolyzer fed with  $1 \text{ kg h}^{-1}$  of wood require an AD systems with a total volume equal to  $10.4 \text{ m}^3$ . In order to compare such volume with commercial anaerobic digestion systems, this value can be converted in a volume per unit of electrical power produced. For Py-AD, using  $\eta=35\%$  for the engine, this means a productivity equal to  $43 \text{ W}_{\text{el}}/\text{m}^3$ , which is comparable with the data of commercial digesters that typically shows volumetric productivities in the  $10\text{-}100 \text{ W}_{\text{el}}/\text{m}^3$  range.[36,37]

455

#### 4. Conclusions



457 This study put into practice the idea of a direct coupling between pyrolysis (Py) and anaerobic  
 458 digestion (AD) to the end of converting woody biomass into a “pyrobiogas” fuel rich in biomethane  
 459 and biochar. Experiments with bench-scale reactors suggested that low pyrolysis temperatures are  
 460 preferable in order to increase the yield of potentially fermentable materials, which includes NCG  
 461 (e.g. CO, H<sub>2</sub>) and water-soluble organic compounds of pyrolysis liquid. These two fractions  
 462 exhibited a summed limit value that approaches to the 50% of chemical energy of input softwood  
 463 biomass feedstock. In particular, chemical analyses showed an almost complete biodegradation  
 464 under anaerobic conditions of semi-volatile components detectable by GC-MS. On the basis of the  
 465 results from laboratory and available literature data, a Py-AD prototype, where the hyphens indicate  
 466 that the pyrolyzer was physically interfaced with two biological reactors, was operated and  
 467 monitored for more than 16 months. This long-term experiment enabled the identification of pros  
 468 and cons of the concept in a real case. The Py-AD produced pyrobiogas, namely an aerosol-free  
 469 biogas (CH<sub>4</sub> 47.1%v/v and 44.6 %v/v CO<sub>2</sub>) containing residual carbon monoxide (6.7% w/w) and  
 470 hydrogen (1.6%) with a yield of 0.21 Nm<sup>3</sup> kg<sub>feedstock</sub><sup>-1</sup>. Experimental results were used for a  
 471 preliminary technical evaluation of the whole process, which resulted reliable in term of energy  
 472 balance and volumetric productivity.  
 473 While this study confirmed the feasibility of Py-AD to convert wood into biogas within a self-  
 474 sustained process, it also evidenced a relatively low absolute yield that calls for important  
 475 improvements in the process. The low yield was attributed to the presence of high molecular weight  
 476 constituents which are refractory to biodegradation, in particular the lignin-derived fraction  
 477 transferred to biological reactors. According to this, the process could be improved by investigating  
 478 new microbial communities, diversion of the water insoluble fraction to different purposes, or by  
 479 targeting the pyrolytic conversion to biodegradable intermediates.

## 481 **List of Abbreviations**

482 AD: Anaerobic Digestion  
 483 APL: Aqueous phase of pyrolysis liquid  
 484 COD: Chemical Oxygen Demand  
 485 CSTR: Continuously Stirred Tank Reactor  
 486 NCG: Non Condensable Gas  
 487 OLR: Organic Loading Rate  
 488 PAHs: Polycyclic Aromatic Hydrocarbons  
 489 Py: Pyrolysis  
 490 Py-AD: Hyphenated Pyrolysis-Anaerobic Digestion process

491 R1: first CSTR reactor used for anaerobic digestion of pyrolysis products  
 492 R2: second plug flow trickling bed reactor for anaerobic digestion of NCG  
 493 ThOD: Theoretical Oxygen Demand  
 494 UASB: Upflow Anaerobic Sludge Blanket  
 495 VFA: Volatile Fatty Acids.  
 496 WI: Water Insoluble

## 498 **Acknowledgement**

499 Hera s.p.a (Italy) is acknowledged for the technical support in set up of Py-AD system and funding  
 500 provided.

## 502 **References**

- 504 1. A.V. Bridgwater, Review of fast pyrolysis of biomass and product upgrading, *Biomass and*  
 505 *Bioenergy* 38 (2012) 68-94.
- 506 2. P. Brassard, S. Godbout, V. Raghavan, Pyrolysis in auger reactors for biochar and bio-oil  
 507 production: A review, *Biosystems Engineering* 161 (2017) 80-92.
- 508 3. S. Fuss, W. F Lamb, M. W. Callaghan, J. Hilaire, F. Creutzig, T. Amann, T. Beringer, W. de  
 509 Oliveira Garcia, J. Hartmann, T. Khanna, G. Luderer, G. F. Nemet, J. Rogelj, P. Smith, J. L.  
 510 Vicente Vicente, J. Wilcox, M. del Mar Zamora Dominguez, J. C Minx, Negative  
 511 emissions-Part 2: Costs, potentials and side effects, *Environmental Research Letters* 13  
 512 (2018) 063002.
- 513 4. A. Funke, M. Tomasi Morgano, N. Dahmen, H. Leibold, Experimental comparison of two  
 514 bench scale units for fast and intermediate pyrolysis, *Journal of Analytical and Applied*  
 515 *Pyrolysis*, 124 (2017) 504-514.
- 516 5. L. Fagnäs, E. Kuoppala, K. Tiilikkala, A. Oasmaa, Chemical Composition of Birch Wood  
 517 Slow Pyrolysis Products, *Energy & Fuels* 26 (2012) 1275-1283.
- 518 6. A. Oasmaa, E. Kuoppala, Solvent Fractionation Method with Brix for Rapid  
 519 Characterization of Wood Fast Pyrolysis Liquid, *Energy & Fuels* 22 (2008) 4245-4248.
- 520 7. S.R. Guiot, R. Cimpola, G. Carayon, Potential of Wastewater-Treating Anaerobic Granules  
 521 for Biomethanation of Synthesis Gas, *Environ. Sci. Technol.* 45 (2011) 2006-2012.
- 522 8. V. Andreoni, P. Bonfanti, D. Daffonchio, C. Sorlini, M. Villa, Anaerobic digestion of wastes  
 523 containing pyrolignitic acids, *Biological Wastes* 34 (1990) 203-214.
- 524 9. T.R.K.C Doddapaneni, R. Praveenkumar, H. Tolvanen, M.R.T. Palmroth, J. Konttinen, J.  
 525 Rintala, Anaerobic batch conversion of pine wood torrefaction condensate, *Bioresource*  
 526 *Technology* 225 (2017) 299-307.
- 527 10. C. Torri, D. Fabbri, Biochar enables anaerobic digestion of aqueous phase from intermediate  
 528 pyrolysis of biomass, *Bioresource Technology* 172 (2014) 335-341.
- 529 11. T. Hübner, J. Mumme, Integration of pyrolysis and anaerobic digestion – Use of aqueous  
 530 liquor from digestate pyrolysis for biogas production, *Bioresource Technology* 18 (2015)  
 531 86-92.
- 532 12. Y. Yang, S. Heaven, N. Venetsaneas, C.J. Banks, A.V. Bridgwater, Slow pyrolysis of  
 533 organic fraction of municipal solid waste (OFMSW): Characterisation of products and

- screening of the aqueous liquid product for anaerobic digestion, *Applied Energy* 213 (2018) 158-168.
13. S.K. Hotta, N. Sahoo, K. Mohanty, Comparative assessment of a spark ignition engine fueled with gasoline and raw biogas, *Renewable Energy* 134 (2019) 1307-1319.
14. I. Angelidaki, L. Treu, P. Tsapekos, G. Luo, S. Campanaro, H. Wenzel, P.G. Kougias, Biogas upgrading and utilization: Current status and perspectives, *Biotechnology Advances* 36 (2018) 452-466.
15. D. Fabbri, C. Torri, Linking pyrolysis and anaerobic digestion (Py-AD) for the conversion of lignocellulosic biomass, *Current Opinion in Biotechnology* 38 (2016) 167-173.
16. C.A. Salman, S. Schwede, E. Thorin, J. Yan, Enhancing biomethane production by integrating pyrolysis and anaerobic digestion processes, *Applied Energy* 204 (2017) 1074-1083.
17. Q. Feng, Y. Lin, Integrated processes of anaerobic digestion and pyrolysis for higher bioenergy recovery from lignocellulosic biomass: A brief review, *Renewable and Sustainable Energy Reviews* 77 (2017) 1272-1287.
18. M. Pecchi, M. Baratieri, Coupling anaerobic digestion with gasification, pyrolysis or hydrothermal carbonization: A review, *Renewable and Sustainable Energy Reviews* 105 (2019) 462-475.
19. M. Baniasadi, A. Tugnoli, R. Conti, C. Torri, D. Fabbri, V. Cozzani, Waste to energy valorization of poultry litter by slow pyrolysis, *Renewable Energy* 90 (2016) 458-468.
20. F. Campuzano, R.C. Brown, J.D. Martinez, Auger reactors for pyrolysis of biomass and wastes, *Renewable and Sustainable Energy Reviews* 102 (2019) 372-409.
21. M. Burkhardt, T. Koschack, G. Busch, Biocatalytic methanation of hydrogen and carbon dioxide in an anaerobic three-phase system, *Bioresource Technology* 178 (2015) 330-333.
22. M. Ghidotti, D. Fabbri, C. Torri, S. Piccinini, Determination of volatile fatty acids in digestate by solvent extraction with dimethyl carbonate and gas chromatography-mass spectrometry, *Analytica Chimica Acta*, 1034 (2018) 92-101.
23. L. Busetto, D. Fabbri, R. Mazzoni, M. Salmi, C. Torri, V. Zanotti, Application of the Shvo catalyst in homogeneous hydrogenation of bio-oil obtained from pyrolysis of white poplar: New mild upgrading conditions, *Fuel* 90 (2011) 1197-1207.
24. C. Torri, T.D.O. Weme, C. Samori, A. Kiwan, D. W. F. Brilman, Renewable Alkenes from the Hydrothermal Treatment of Polyhydroxyalkanoates-Containing Sludge, *Environmental Science & Technology* 51 (2017) 12683-12691.
25. OECD guideline 301F, "Manometric respirometry" <http://www.oecd.org/chemicalsafety/risk-assessment/>. (accessed 04.2014).
26. S. A. Channiwala. P.P Parikh, A unified correlation for estimating HHV of solid, liquid and gaseous fuels. *Fuel*, 81(2002), 1051-1063.
27. C. U. Pittman, P.H. Steele, Pyrolysis of Wood/Biomass for Bio-oil: A Critical Review, *Energy & Fuels* 20 (2006) 848-889.
28. A Grimalt-Aleman, I.V. Skiadas, H.N. Gavala, Syngas biomethanation: state- of- the- art review and perspectives, *Biofuels, Bioproducts and Biorefining* 12 (2018) 139-158.
29. K.T. Klasson, J.P. Cowger, C.W. Ko, J.L. Vega, E.C. Clausen, J.L Gaddy, Methane production from synthesis gas using a mixed culture of *R. rubrum* M. barkeri, and M. formicicum, *Appl Biochem Biotechnol* 24-25 (1990) 317-328.
30. T. Kan, V. Strezov, T. J. Evans, Lignocellulosic biomass pyrolysis: A review of product properties and effects of pyrolysis parameters, *Renewable and Sustainable Energy Reviews*, 57 (2016) 1126-1140.
31. Y. Yang, J.G. Brammer, A.S.N. Mahmood, A. Hornung, Intermediate pyrolysis of biomass energy pellets for producing sustainable liquid, gaseous and solid fuels, *Bioresource Technology* 169 (2014) 794-799.

32. R. Kleerebezem, Joosse, B., R. Rozendal, M.C.M. Van Loosdrecht, Anaerobic digestion without biogas?, *Reviews in Environmental Science and Bio/Technology* 14 (2015) 787-801.
33. C. Di Blasi, C. Branca, A. Galgano, On the Experimental Evidence of Exothermicity in Wood and Biomass Pyrolysis, *Energy Technology* 5 (2017) 19-29.
34. M. Cordella, C. Torri, A. Adamiano, D. Fabbri, F. Barontini, V. Cozzani, Bio-oils from biomass slow pyrolysis: A chemical and toxicological screening, *Journal of Hazardous Materials* 231–232 (2012) 26-35.
35. W.S. Lee, A.S.M. Chua, H.K. Yeoh, G.C. Ngoh, A review of the production and applications of waste-derived volatile fatty acids, *Chemical Engineering Journal*, 235 (2014) 83-99.
36. D. Brown, J. Shi, Y. Li, Comparison of solid-state to liquid anaerobic digestion of lignocellulosic feedstocks for biogas production, *Bioresource Technology* 124 (2012) 379-386.
37. <http://european-biogas.eu/wp-content/uploads/2018/02/Success-Stories-EBA-2018.pdf>, on 06/05/2019.

## Figure Captions

**Figure 1:** pyrolysis-anaerobic digestion prototype used for Py-AD and Py experiments.

**Figure 2:** experimental apparatus used for continuous anaerobic digestion of aqueous phase pyrolysis liquid (APL)

**Figure 3:** partition of chemical oxygen demand upon intermediate pyrolysis of pine wood pellets performed with bench scale pyrolyzer. \*data back calculated from yield and composition from ref. [27]

**Figure 4:** volumetric syngas conversion rate observed during different stages of long term adaptation of microbial consortia to volatile pyrolysis products.

**Figure 5:** volumetric composition of biogas during 30 days of Py-AD test with constant biomass feed rate.

**Figure 6:** VFA concentration observed in R1 during 30 days of Py-AD test with constant biomass feed rate.

**Figure 7:** trend of OLR and yields of VFA and biogas during continuous anaerobic digestion of residual APL obtained from Py-AD experiment.


623

624 **Figure 8:** Graphical description of the input/outputs of chemical energy of the Py-AD system  
625 proposed here. All data are expressed as % of initial chemical energy stored in pine wood biomass.

626


627 **Figures**

628 **Figure 1**

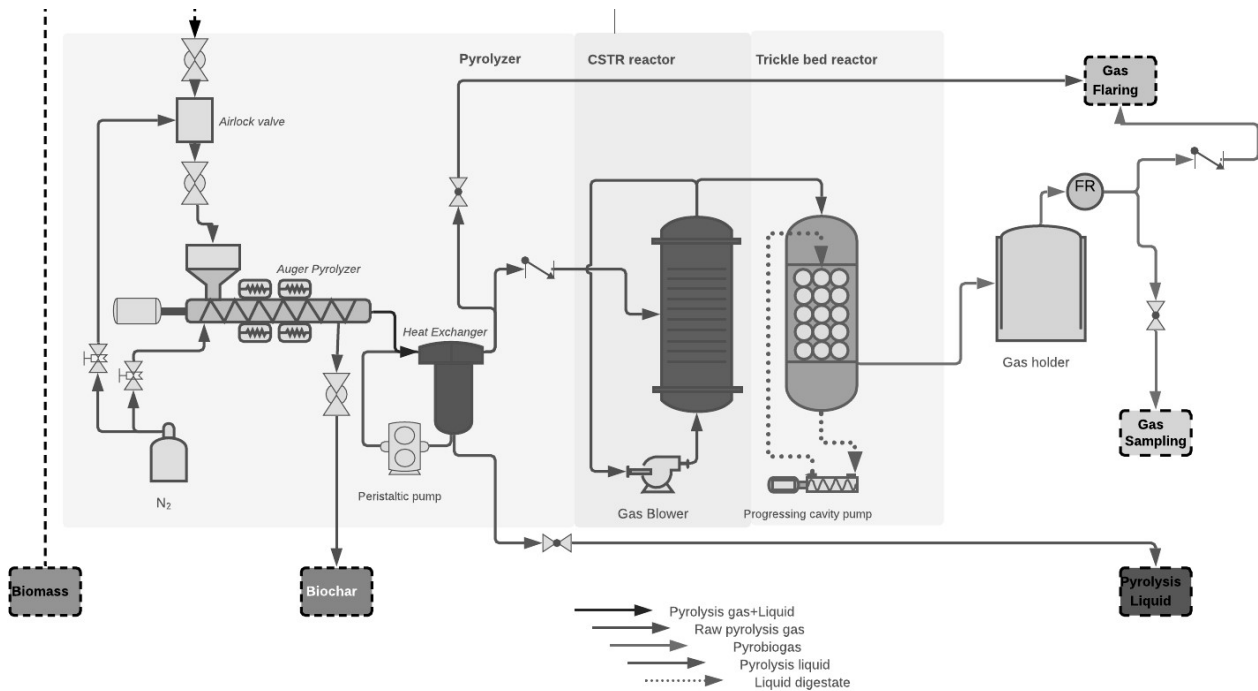


629

630 **Figure 2**

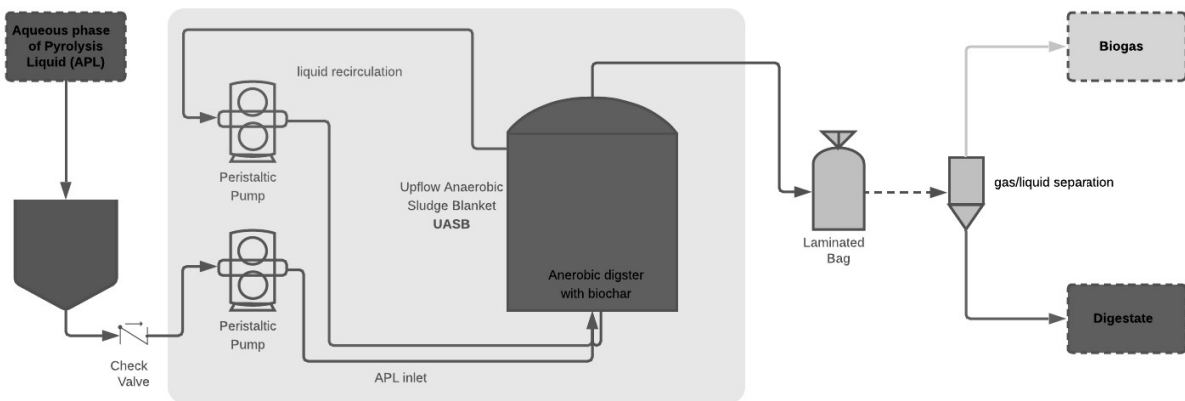


631


632 **Figure 3**

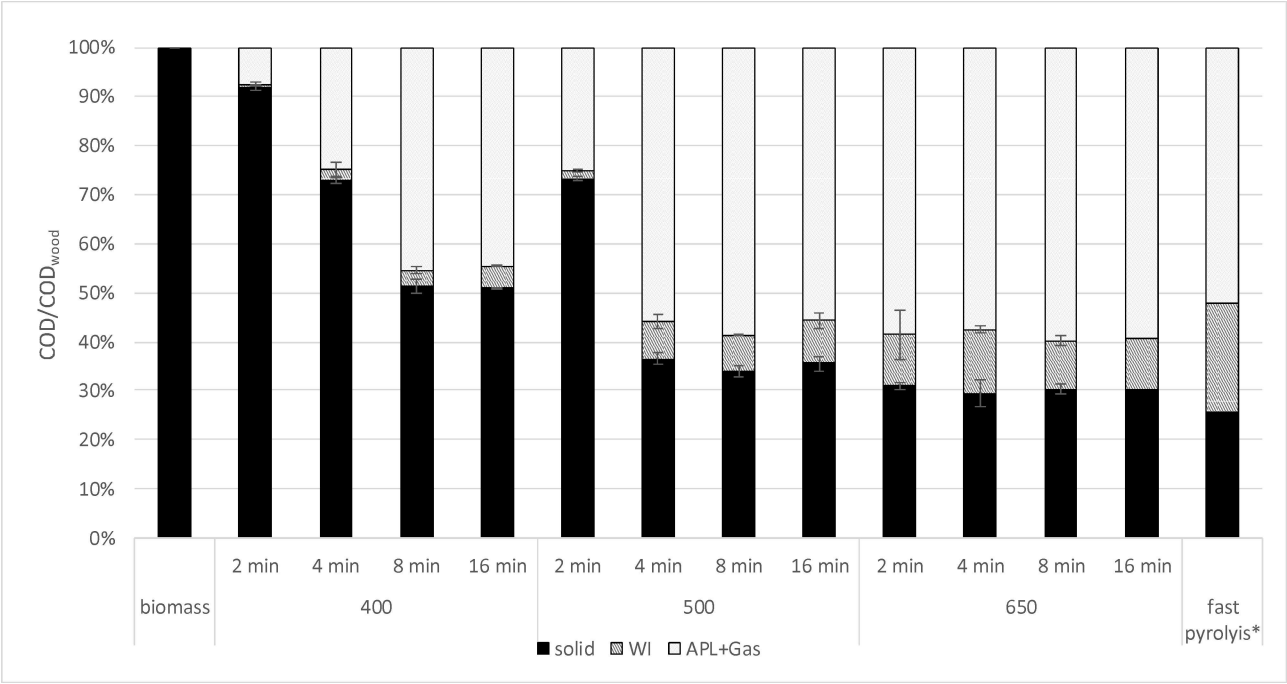


**Figure 4**

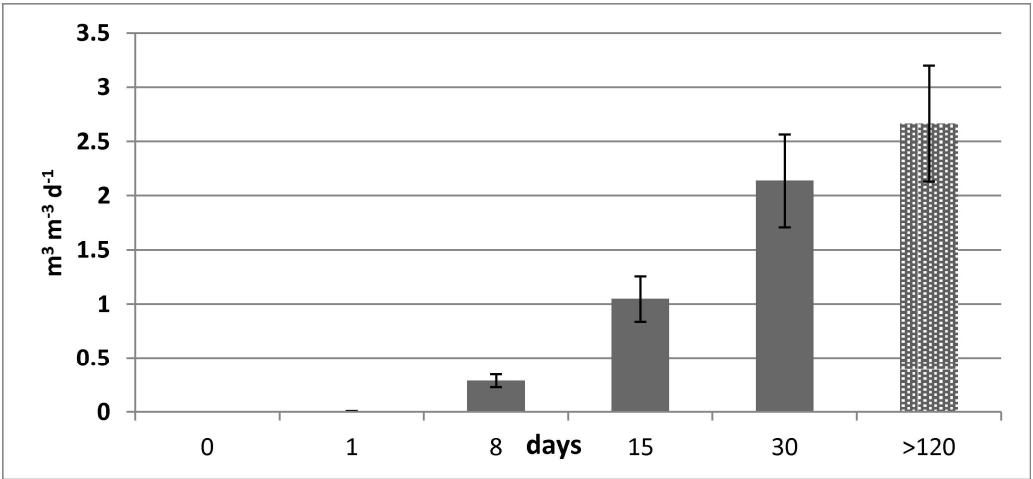


**Figure 5**

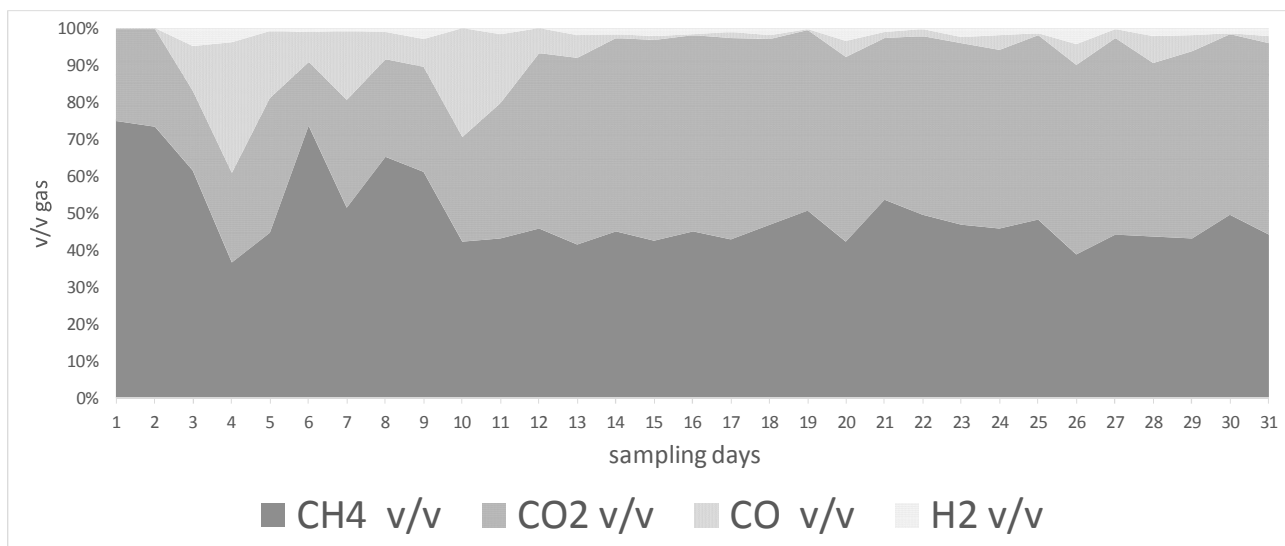


**Figure 6**

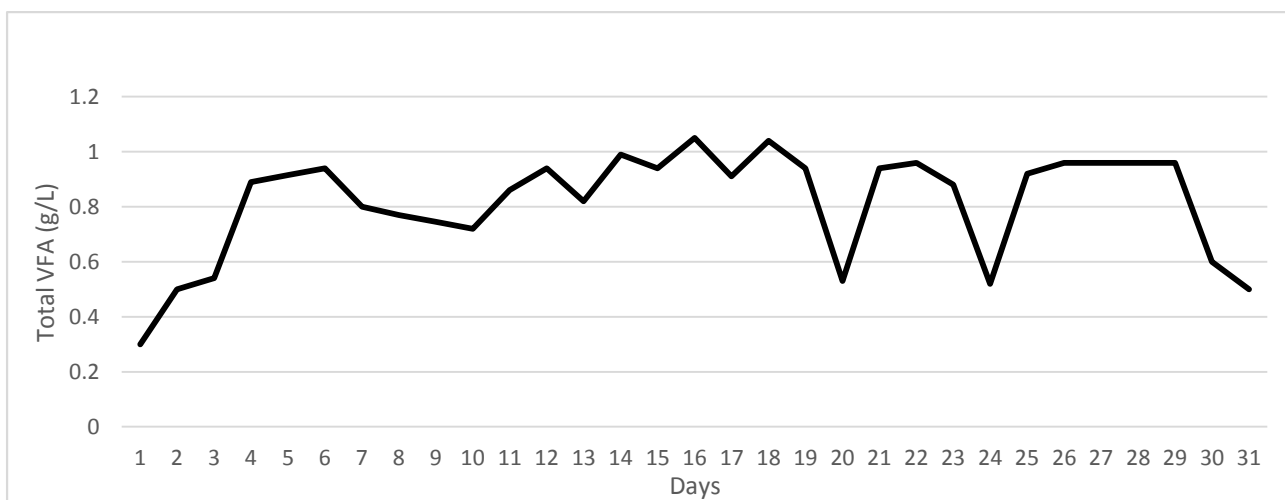

**Figure 7**

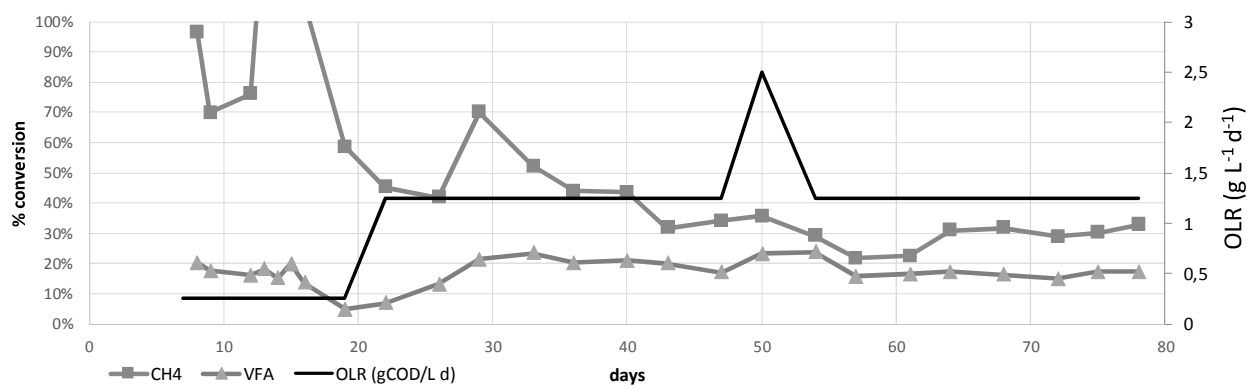

649 **Figure 8**

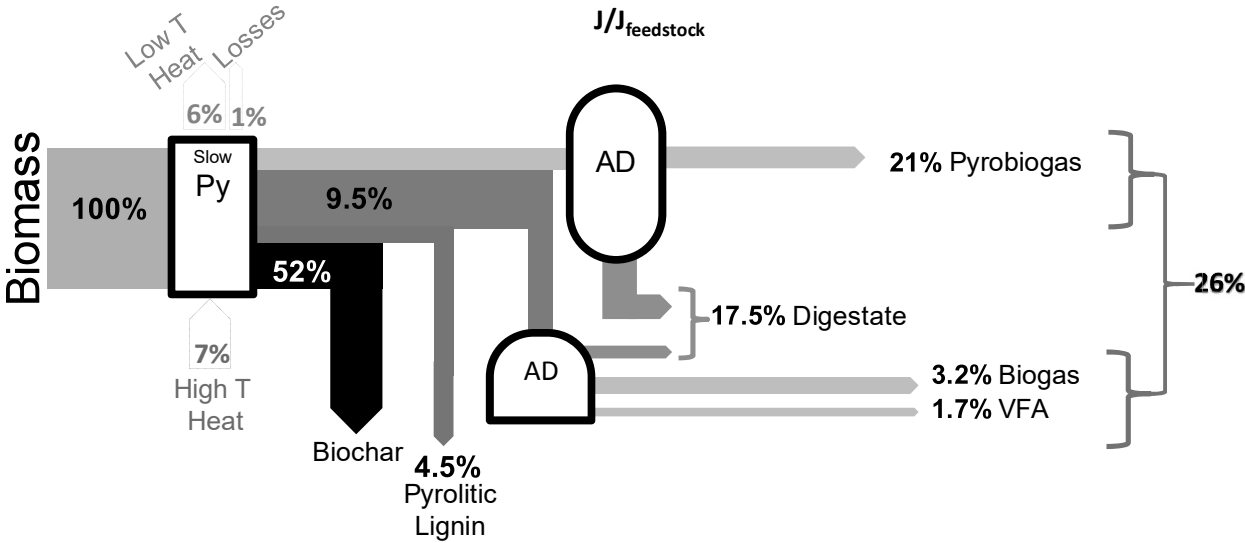

650  
651  
652