



ALMA MATER STUDIORUM
UNIVERSITÀ DI BOLOGNA

ARCHIVIO ISTITUZIONALE DELLA RICERCA

Alma Mater Studiorum Università di Bologna Archivio istituzionale della ricerca

A knowledge-based workflow to dynamically manage human interaction in extended enterprise

This is the final peer-reviewed author's accepted manuscript (postprint) of the following publication:

Published Version:

MENGONI M., GRAZIOSI S., MANDOLINI M., PERUZZINI, M. (2011). A knowledge-based workflow to dynamically manage human interaction in extended enterprise. INTERNATIONAL JOURNAL ON INTERACTIVE DESIGN AND MANUFACTURING, 5(1), 1-15 [10.1007/s12008-010-0103-7].

Availability:

This version is available at: <https://hdl.handle.net/11585/955980> since: 2024-02-11

Published:

DOI: <http://doi.org/10.1007/s12008-010-0103-7>

Terms of use:

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).
When citing, please refer to the published version.

(Article begins on next page)

This is the final peer-reviewed accepted manuscript of:

Mengoni, M., Graziosi, S., Mandolini, M. *et al.* A knowledge-based workflow to dynamically manage human interaction in extended enterprise. *Int J Interact Des Manuf* 5, 1–15 (2011)

The final published version is available online at:

<https://doi.org/10.1007/s12008-010-0103-7>

Terms of use:

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>)

When citing, please refer to the published version.

The research work is also well described. We regret not to have an independent section explaining why the presented development matches interactive engineering topic (the main theme of IJIDeM journal). We invite authors to do it, maybe by redefining the concept of Interaction (often used in the text). The bibliography is exhaustive, but we can also regret not to have any references coming from IJIDeM's community:

- A Tutor Agent for supporting distributed knowledge modelling in interactive product design, Ricardo Mejia-Gutierrez, Xavier Fischer, Fouad Bennis, International Journal of Intelligent Systems Technologies and Applications (IJISTA), Vol4(3), p. 399-420,
 - Collaboration based on product lifecycles interoperability for extended enterprise, Farouk Belkadi, Nadège Troussier, Benoit Eynard and Eric Bonjour, IJIDeM journal, Vol 4(3),
 - Research in Interactive Design (Springer)
- However, the paper is really good and can be rapidly published after light modifications.

Answer:

Three main topics of IJIDeM fit with the proposed research issues:

- the description of industrial problems to identify significant knowledge and variables;
- advanced modelling of design and manufacturing problems;
- interactive computer-based platforms to support collaborative product development.

The first one is well addressed in the paper as it focuses on the development of a knowledge-based platform to support knowledge sharing, process and product content management, role-playing, etc. that deeply characterize the new context of extended enterprise. Moreover, the definition of the platform functionalities just starts from the analysis of the real industrial context of three design and supply chains involved in the CO-ENV project.

The second topic is deepened in section 3.1 where process-modelling techniques have been studied in order to select the best one to represent the complex interactions in collaborative product development.

The dynamic workflow management system really combines the results of investigation of the two topics. It represents a reliable solution to explicit and to formalize the process knowledge distributed across the extended enterprise. It also introduces same self-learning functionalities in terms of events storing, retrieving and proper solution extraction.

The third topic is central in order to contextualize the whole research approach.

At the beginning of chapter 2, where the research context is introduced, a brief discussion of how the concept of interaction is meant is presented. It provides both the requirements for the development of the knowledge-based platform and the criteria for the assessment of the achieved research results. Moreover, it allows understanding how the proposed research matches interactive engineering topics.

"Collaborative product development (CPD) implies three different forms of interaction:

- human-human interaction among team work participants consisting of individuals, teams or even entire organizations. They act in a distributed, heterogeneous and dynamic environment to achieve a common goal. As a consequence, a renewal of the expected shared competences and new governance modalities for the relationships occurred over the supply-chain become imperative [BT1].
- human-computer interaction that refers to the interaction between team members and the computer-based interactive systems used to support collaborative work, to manage knowledge sharing about the design process and the design content, to control all process activities and role playing, etc. Human-Computer Interaction is particularly meaningful in the design activities involving multidisciplinary teamwork. It influences users behaviours, representational and communication modalities [M1].
- interaction between the individual and the collective dimensions. In the context of collaborative design, single components can be individually developed, but some activities require cooperation (e.g. the design of product interface, the assessment of the coherence between each specific solution and the whole design intent, feasibility analysis, etc.). Collective activities are carried

Fig. 1 Flowchart representation of the three CO-ENV chains product

development process.

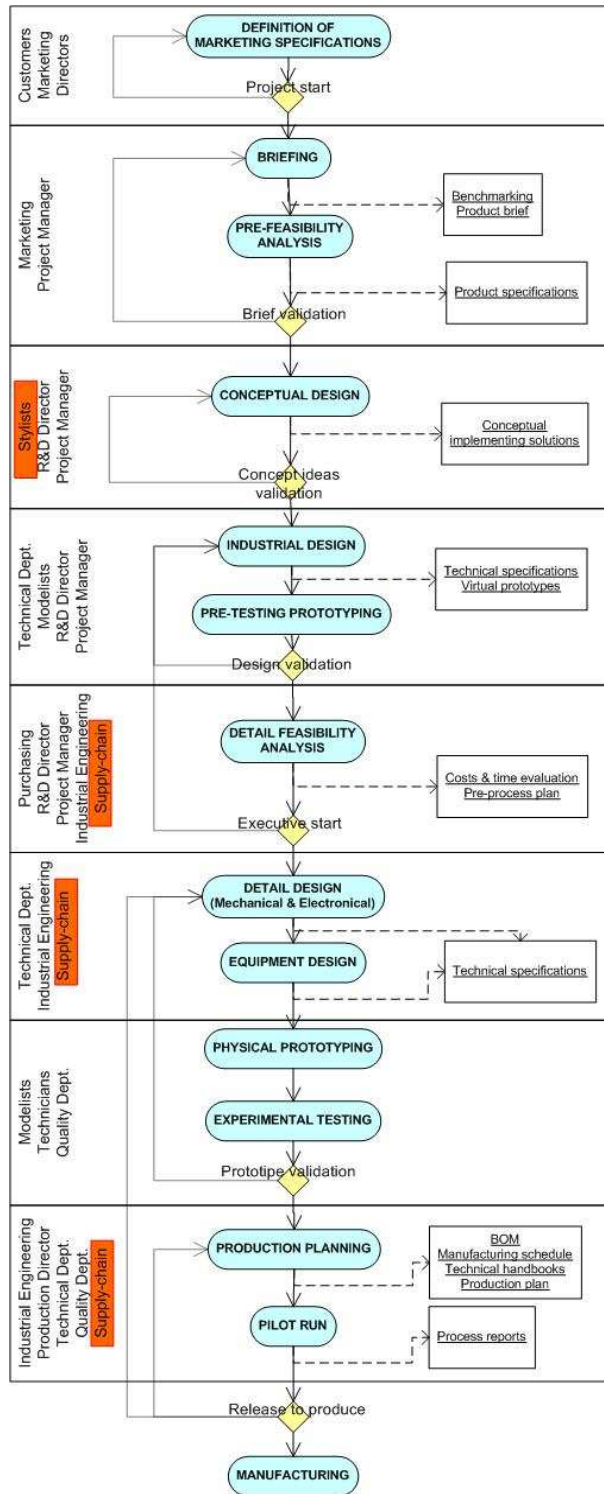


Fig. 2 The dynamic workflow system architecture.

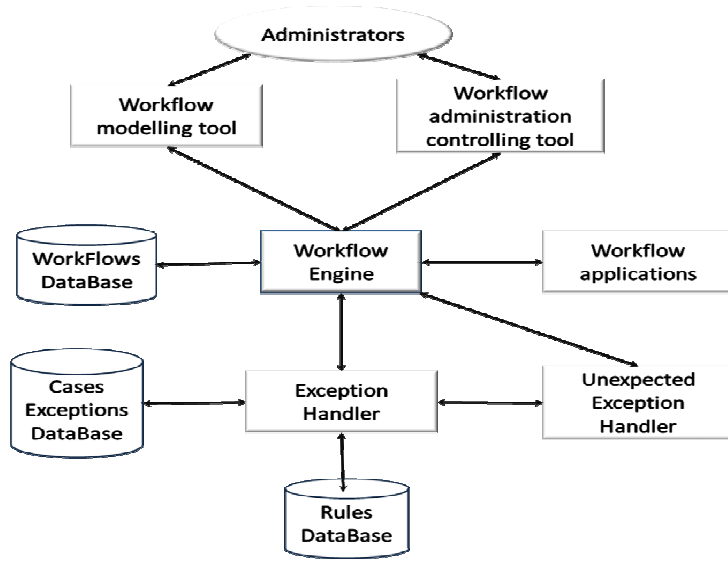


Fig. 3 The unexpected exception handler.

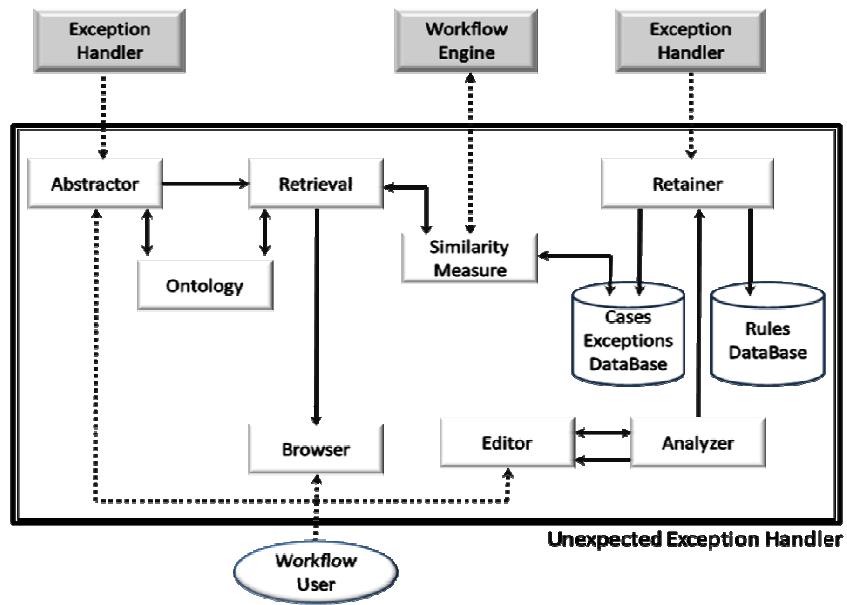


Fig. 4 Differences between the proposed dynamic and traditional static WfMS on managing unpredictable events. UML Activity Diagrams are used to model the sub-process involved in the change.

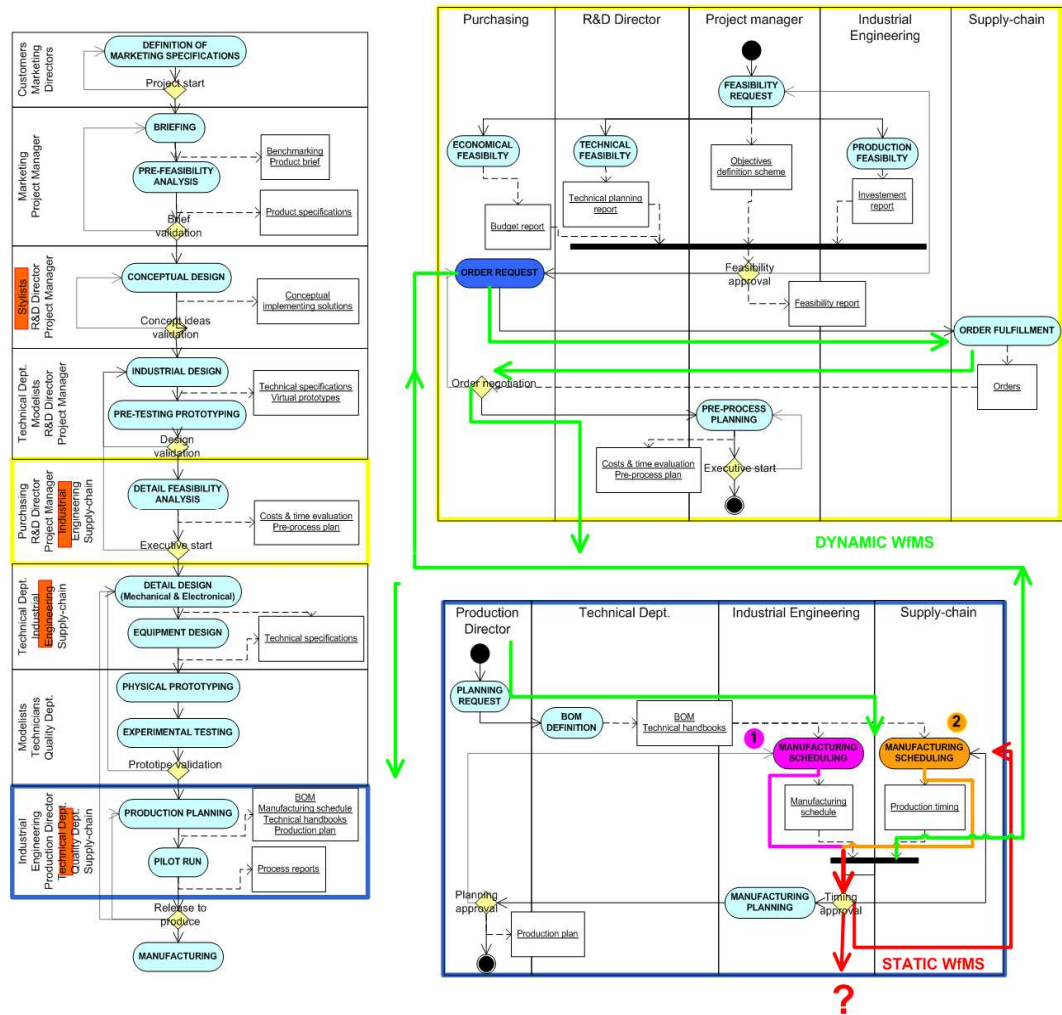


Table 1 Expected exceptions database structure and related generic attributes.

Source	Internal
	External
Type of exception	Technical/technological
	Economical
	Temporal
	Customer-Oriented
	Marketing
Level of importance	High
	Medium
	Low

A knowledge-based workflow to dynamically manage human interaction in extended enterprise

Abstract: Extended enterprises require novel modes of organizing companies and managing collaboration. Although the promise of Information Communication Technologies to connect people, processes and information, it is worth to notice that current implementations are strongly document-oriented and do not enable flexible workflow management overcoming well-known inter-enterprise integration difficulties. The long-term goal of the research is the study of a new methodology and the development of dedicated software tools to facilitate the dynamic collaboration among 21 companies participating to a research project, funded by the Italian Economic Ministry, called CO-ENV. The definition of dynamic workflow system architecture represents the step forwards the implementation of a collaborative platform. Preliminary benchmarking of available systems and techniques, the product development process analysis of the project participant companies and a possible structure of the system are well illustrated. Examples of expected and unexpected exceptions are reported and differences between static and dynamic workflow management systems are discussed.

Key words: Dynamic Workflow, Design Process, Product Innovation, Product LifeCycle Management, Extended Enterprise

1 Introduction

In the last decades, manufacturing industry has experienced important upsets and changeovers as a consequence of the rapid evolution of the global market. Companies are forced to face dynamic contexts that require cut-down lead times, high product quality and lower costs in all product development phases. This framework characterizes the “hypercompetitive” market [D1]. Moreover, the traditional paradigm of product standardization is out-of-date: consumers are becoming more selective, looking for customized products conceived according to their individual needs. As a consequence, companies are seeking ways to introduce research and innovation in terms of technologies, strategies and processes, in order to provide high level of market adaptability and additional functionalities and performances to products. Furthermore multidisciplinary teams are involved in the product design: they consist of internal technical staff and members of the design and supply-chain, often geographically distributed. The

1 management of the whole organization and of all individual training and
2 expertises is not a trivial task.

3 In order to manage complexity, companies aim at optimizing the processes of the
4 entire “extended enterprise” for rapidly developing new products, processes and
5 services by adopting collaborative environments where all actors can share
6 product and process data, integrate software applications, be supported by flexible
7 tools for business processes management.

8 Agility concepts represent the key enabler for supporting the dynamic nature of
9 teamwork collaboration. Agility can be considered as a new way of thinking
10 company’s processes, including design and manufacturing. Its implementation
11 allows companies to give a rapid and flexible response to uncertain and
12 unpredictable changes [PG1]. Agility requires collaboration, integration of
13 customers in the development chain, knowledge reuse and rapid configuration of
14 product and processes [ML1]. It represents a novel approach for business
15 organizations in effectively and easily managing the entire product lifecycle.

16 Agility concepts are mainly based on two key enablers: strategies and exchange
17 Information Technologies (IT). IT technologies are not able to realize the
18 necessary integration in the design cycle, implementing agile strategies is
19 fundamental to supports cross-enterprise interaction. Innovative strategies
20 implementation, such as Concurrent Engineering (CE), Virtual Enterprise (VE),
21 distributed teams, supply-chain integration and lean manufacturing, is then
22 necessary to manage product development and manufacturing processes.

23 Exchange information technologies guarantee an efficient data interchange and
24 facilitate the product-process-business information flow. Knowledge-based
25 management systems provide structured databases to collect and retrieve
26 information and company best practices. Product Data and Product Lifecycle
27 Management systems (PDM/PLM), Engineering Data Management systems
28 (EDM) and electronic Bill Of Processes systems (eBOP) are well-known
29 examples. Advanced digital technologies aim at improving the whole product
30 development cycle by creating a collaborative environment where data can be
31 visualized, manipulated and modified according to the different viewpoints
32 involved in the process. Computer Aided Design-Engineering-Manufacturing
33 systems (CAD/CAE/CAM) and Virtual Reality technologies (VR) are the most
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 used tools for supporting design processes but they are poorly integrated with the
2 first ones.

3 Nowadays the PLM systems spread representing the standard technology to create
4 a dynamic extended enterprise for their promising ability to connect people,
5 process and information.
6

7 However it is worth to notice that current PLM implementations are strongly
8 document-oriented, have a structured and not much customizable data model and
9 suffer from inter-enterprise integration difficulties [AG1]. Rigid procedures and
10 strong centralization entail two main consequences: first, heavy configuration
11 changes should be made at the server level when enterprises evolve; secondly
12 great difficulties could arise when enterprises wish to collaborate with suppliers
13 and customers. Moreover, PLM tools are generally based on static Workflow
14 Management Systems (WfMSs) that force companies to organize themselves
15 according to predefined structures instead of their needs and practice. Their
16 implementation in industrial contexts implies much effort to represent specific
17 company's requirements and processes, to structure adequate knowledge-based
18 databases and to integrate all existing digital technologies. This is particularly
19 evident in small and medium enterprises (SMEs) for their own limited asset, even
20 if also big industries are affected by similar problems. The difference in the
21 adopted IT technologies for supporting all business processes makes the
22 collaboration between small and large enterprises difficult to achieve.
23

24 The starting point is that IT should deal with industrial processes and implement
25 innovation in a new way. Effective product innovation should be pushed through
26 the innovation of the entire product lifecycle management and the improvement of
27 every process inside. Competitiveness and dynamicity demand data integration
28 and effective collaborative environments in order to support interactions among
29 partners, data exchange, unpredicted events detection and solution. Companies
30 can cope with the competitive market and create really innovative products by
31 immediately evaluating the impact of unpredictable events on implemented
32 processes and rapidly reconfiguring them minimising consequences propagation.
33

34 The CO-ENV project, funded by the Economic Development Italian Ministry
35 (2007-2009), moves from these general considerations and represents the context
36 of the present research activities. It involves 21 Italian companies arranged into
37 three industrial chains. The objective of research is the creation of a web-based
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 platform to manage interactions in the extended enterprise thanks to the creation
2 of a collaborative environment to visualize and share information. Exchange data
3 will be managed by a dynamic workflow management system (WfMS) that
4 supports the agile product development within the whole design and supply chain.
5 The product development processes of the leaders' enterprise provide the practical
6 test-cases for the research and application of the developed systems.
7

8
9
10 The research program is focused on:

- 11 • the study and definition of theoretical models to organize and concretize the
12 dynamic collaboration that will overcome the identified critical phases. AS-IS
13 processes will be transformed into TO-BE processes and they will be
14 implemented in the developed system;
15
- 16 • the design and development of the web-based platform architecture that
17 integrates dedicated software tools in order to support collaboration,
18 knowledge sharing, co-designing, technical and marketing product
19 configuring and, finally, workflow managing;
20
- 21 • the practical experimentation of the prototypal systems for the validation of
22 the process models and the developed technologies in a real multi-enterprises
23 context.
24

25
26
27 In this context, the present paper represents a step toward the development of the
28 dynamic workflow system as it discusses preliminary results of the project
29 research activities. It focuses on the analysis of current product development
30 processes of the three involved chains in order to identify the most critical phases
31 in terms of time to market, communication problems, interaction, information
32 exchange, etc. In order to overcome communication problems in intra and inter
33 chains, a new WfMS architecture is proposed to dynamically manage design
34 workflows once unpredictable events occur. The last section discusses the
35 different behaviour of static and dynamic workflows and their performances are
36 compared.
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53

54 **2 The research activity context: the CO-ENV project**

55
56
57 In order to be competitive in the global market and to rapidly answer to changing
58 needs and events, companies should be never again conceived as a scene for
59 individuals' interaction but as a system of collective knowledge. Nowadays the
60
61
62
63
64
65

1 design of innovative products demands for collaboration among multiple business
2 competencies, integration of different technological domains, efficient data
3 interchange and dynamic reconfiguration of the product design process. Available
4 digital technologies play an important role in the formalization and management
5 of the industrial know-how, but they are too structured, not-easily open toward
6 customers and suppliers and not flexible enough.
7

8
9
10 In the context of Collaborative Product Development, three forms of interaction
11 should be taken into account to meet cooperation requirements:
12

- 13 - human-human interaction among team work participants consisting of
14 individuals, teams or even entire organizations. They act in a distributed,
15 heterogeneous and dynamic environment to achieve a common goal. As a
16 consequence, a renewal of the expected shared competences and new
17 governance modalities for the relationships occurred over the supply-chain
18 become imperative [BT1].
19
- 20 - human-computer interaction that refers to the interaction between team
21 members and the computer-based interactive systems used to support
22 collaborative work, to manage knowledge sharing about the design process
23 and the design content, to control all process activities and role playing,
24 etc. Human-Computer Interaction is particularly meaningful in the design
25 activities involving multidisciplinary teamwork. It influences users
26 behaviours, representational and communication modalities [HF1].
27
- 28 - interaction between the individual and the collective dimensions. In the
29 context of collaborative design, single components can be individually
30 developed, but some activities require cooperation (e.g. the design of
31 product interface, the assessment of the coherence between each specific
32 solution and the whole design intent, feasibility analysis, etc.). Collective
33 activities are carried out to share the different aspects of a problem,
34 individually faced, and search for an integral solution that go beyond the
35 limited vision of the involved individuals [BH1].
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53

54 In this context the CO-ENV project aims to introduce innovation and improve
55 process quality in conceptual and engineering design and in marketing and
56 manufacturing as well, by creating a multi-enterprises aggregation architecture.
57
58
59
60
61
62
63
64
65

1 The CO-ENV project involves 21 Italian companies, 5 large and 16 small to
2 medium enterprises. All firms are arranged into three different industrial chains
3 whose leader companies are: Biesse, Indesit Company and Teuco Guzzini. They
4 respectively design and produce woodworking machines, household appliances
5 and wellness products. Their structure is quite similar: the leader company
6 concepts, realizes and commercializes the final products, while its partners
7 provide professional advice and supplying services and components.
8

9
10
11
12 The three years research activity (2007-2009) is based on the development and
13 experimentation of innovative IT technologies in order to implement concepts
14 such as cooperation, agility and modularity. Starting from the investigation of
15 available technologies, the activity goes forward assessing AS-IS product
16 development processes, identifying critical phases, proposing innovative solutions
17 and setting up a proper platform in order to effectively support companies'
18 interaction.
19

20
21
22 The definition of a collaborative web-based platform is the main result of the
23 research. Innovation processes are managed by a knowledge-based workflow
24 system implemented in the platform.
25

26
27
28 The platform will represent the common layer through which companies' specific
29 systems can communicate and share data in order to create a cross-sectional
30 design process that overcomes the single industry's context.
31

32
33
34 The research program aims at achieving the following goals:
35

- 36 • supporting the collaborative design of innovative product by using dedicated
37 systems for data management, data sharing and data exchanging along every
38 single industrial chain;
 - 39 • providing real-time interaction among project partners by the developed web-
40 based platform, that will be integrated by software applications for specific
41 design activities and for the sharing of software tools in a remote way;
 - 42 • managing both inter-chain and intra-chain processes: from the conceptual
43 phase to the technical feasibility, to preliminary and detailed design, still
44 manufacturing activities and to suppliers – customers – dealers interaction, by
45 developing a proper WfMS;
 - 46 • sharing design, product and process data across the whole design-chain and
47 supply-chain by integrating the developed systems with implemented PLM
48 tools;
- 49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

- improving the interaction among the different actors of the design-chain, characterized by different insight, tacit knowledge and competencies, and creating a real collaboration among all of them by the project web-portal. The sharing of know-how, expertises, technical laboratories and special equipments, the creation of e-learning environments, the remote use of advanced software systems are the main functionalities of the CO-ENV web-portal that will contain the collaborative platform. It also will contribute to realize multi-enterprises synergies in out-sourcing and in marketing logistic;
- gaining upon marketing and technical areas by developing CAD-based tools to rapid configure product variants to quickly address customer requirement changes. The automatic configuration will be allowed only if modularity concepts will be implemented into the design practice;
- automatic developing and designing of modular products on the specific customers needs by introducing mass customization principles [TJ1]. This new philosophy will help companies to regain those market slices won by emerging and low-cost countries;
- forecasting of the product price by knowledge-based tools that retrieve data from technical documents such as preliminary design models, drawings or CAD models;
- organizing and managing e-learning environments for agility strategies implementation for all CO-ENV partners.

This paper represents the first step forward the project objectives' achievement. It contains effective guidelines for structuring a dynamic WfMS architecture that will be integrated in the web-based platform to support cooperation and interaction among the project industrial partners.

3 The design process management: potentialities and issues of available tools and methods

In order to manage the dynamic changes and the complex aspects of the product development processes of the CO-ENV partners, a proper knowledge-based WfMS should be adopted. The system has to efficiently manage business processes and their real-time reconfiguration once an unpredictable event occurs.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

In order to achieve this objective, two main elements are required: a modelling tool able to formalize enterprise's knowledge and behaviour inside a workflow model, and an interactive event handling system for dynamically reconfiguring the process when unforeseen events occur in product's lifecycle. The potentialities and issues of available tools and methods are discussed in the following sections.

3.1 Why to model enterprise processes

A process is defined as a structured, measured sets of activities designed to produce a specified output for a particular customer or market [D2]. In particular, a business process defines the way in which enterprise's goals are achieved [S1]. The product's success is the reflection of the level of "maturity" of a business enterprise. Indeed, the enterprise's maturity directly relies on its ability in capturing and sharing process knowledge and in transferring them from individuals or groups into process standard models. Process analysis and modelling play an important role in making companies competitive: they allow the definition of those activities necessary to achieve the process tasks and the identification of process fails causes [MF1]. This overview explains the increasing popularity of business process management tools and the numerous methodologies and tools developed to support it.

Several techniques for business process modelling have been developed. They can be divided into two categories: static and dynamic. The first enables industrial processes modelling with the flow of information (i.e. UML, Petri-Nets, flowcharting, IDEF0, etc.) while the second enables the evaluation of the processes changes before happening (i.e. Event-Process Chain) [PH1]. Dynamic techniques support the identification and redesign of critical business processes by simulating the expected performance and using a big amount of enterprise's historical data. They are useful tools for performance evaluation but not for their comprehension and representation.

In this research context, the word "dynamic" is not related to the process modelling technique but to the system itself, able to dynamically reconfigure the process workflow. The benchmark of available techniques is based on two essential requirements: 1) the ease to identify the functions, activities, tasks and decision makers, 2) the ease to implement all these aspects into a process modelling software. The adopted process modelling perspective is both

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

management and technical oriented because it is necessary to provide a quick and intuitive overview of the business process and contemporary to focus on the proper IT set-up for supporting business process management [D3].

The benchmarking results in the UML technique: it allows the quick and deep representation of all business processes and their easy implementation into software tools. It is supported by nine different diagrams highlighting different aspects of the modelled processes: sequence diagrams, collaboration diagrams, state chart diagrams and activity diagrams are the most relevant in the workflow management because they address the system dynamic behaviour. In addition, use case diagrams are very useful in the early stage of workflow modelling in order to identify stakeholders and clarify the exceptions handled by the systems.

3.2 Why to use a Workflow Management System

A workflow is defined as the automation of a business process, in whole or part, during which documents, information or tasks are passed from one participant to another for action, according to a set of procedural rules [WF1].

Currently, workflow technology is considered as essential to integrate distributed and heterogeneous applications and information systems to improve business processes effectiveness and productivity [GH1] [SC1] [JB1] [CH1].

On the other side, the level of the integration between document management systems in general and other core transactional systems (e.g. finance or ERP) is still very low. Only few companies are well integrated and only a restricted number extends their workflows to all chain partners. As market competitiveness grows, organizations must clearly define their business goals and increase their reliance on Internet technologies and e-business solutions in goals achieving [VK1].

E-business applications may be classified into *inter-business* and *intra-business*.

The firsts are used for the communication among company departments, its industrial partners and customers as well the seconds are applied to collect and share information and computing resources among company's employers.

The main purpose of inter-business application, such as *Business to Business* (B2B), is to manage inter-organizational relationships, build stronger partnerships for realizing an effective collaboration and share knowledge for achieving mutual

1 benefit [AG2]. The most important B2B process is the supply chain integration
2 that provides visibility and access to selected partners or suppliers.

3 E-business applications aim at improving and transforming enterprise's key
4 processes through the use of Internet technologies. They are supported by
5 workflow system and methods providing some advantages: the transparency, the
6 possibility to make all process participants conscious of all developing activities,
7 the ease of process control and, finally, the capacity of merging customers,
8 information and tasks into an unified environment.

9 WfMSs are used to support the modelling, analysis and enactment of structured
10 business processes. Current systems are unfortunately too rigid and unable to
11 provide adequate answers to exceptions or deviations that differ from the
12 modelled process. These issues have inhibited the wider implementation of
13 WfMSs [AE1]. Exceptions are referred either to situations not modelled by the
14 WfMS or to deviations between what has been planned and what actually
15 happens. It has been demonstrated that such deviations are really common in
16 almost all processes: their handling appears relevant for improving inter and intra
17 business processes.

18 Unpredictable exceptions can drastically change process definition and decrease
19 the chances of delivering the desired business result. Industrial contingencies
20 usually determine large wastes of time, need of additional resources and
21 involvement of the workflow managers in order to manually modify the
22 predefined processes.

23 However studies have shown that the majority of exceptions can be anticipated.
24 So they are not exceptions in the real sense but they represent a sort of deviation
25 from the normal process [SO1]. The recognition, classification and modelling of
26 deviations improve the workflow flexibility.

27 Exceptions can be classified into [SM1]:

- 28 • *Expected*, if they can be anticipated by process analysts or inferred from
29 experience and company's historical data. Specific workflows can be drawn in
30 advanced for handling them;
- 31 • *Unexpected*, if they are completely unknown as they are determined by
32 infrequent and non-repetitive events.

33 In order to realize an exceptions aware system, it is necessary to clarify the nature
34 of exceptions and provide guidelines for their solution during the system

1 development. The exception knowledge space is characterized by known,
2 detectable, and resolvable exceptions. If the exception has not been included in
3 the knowledge system, it can be considered as an unpredicted exception;
4 otherwise, it can be considered expected and the system is able to determine if the
5 exception is detectable. When a known and detectable exception occurs, the
6 system derives one of the predefined solutions and the deviation can be solved.
7 Any position in such exception knowledge space can be represented as an
8 exception point. The exception knowledge of an exception aware system is the set
9 of all those points [LS1].

10 Actually, the accepted practice is that if an exception can be conceivably
11 anticipated, it should be included in the process model [AH1]. However, this
12 approach can lead to very complex models. Furthermore, much of them will never
13 be executed in most cases and add orders-of-magnitude complexities to workflow
14 logic: mixing business logic with exception handling routines complicates the
15 verification and modification of both [HA1]. In addition it makes the models
16 unintelligible to stakeholders.

17 As available WfMSs do not implement handlers able to manage any type of
18 unpredictable events, in the last years several researches have been oriented to the
19 management of dynamic workflows. Luo et al. [LS1] introduce a defensible
20 workflow as a framework to support exception handling for workflow
21 management. The authors apply *JECA rules* (Justification-Event-Condition-
22 Action rules) to capture more contexts in workflow modelling: the resulting
23 workflow is based on a situation dependent reasoning to enhance the system
24 capability. Furthermore, a *Case-Based Reasoning* (CBR) mechanism with
25 integrated human involvement is used for improving the exception handling
26 ability. The general approach is based on collecting cases to capture company's
27 experiences, retrieving similar prior exception handling cases and reusing the
28 captured experience in new situations.

29 Hwanga et al. propose a similar approach where the architecture model deals with
30 both expected and unexpected exceptions [HT1]. Expected exceptions and
31 handling approaches are specified by *ECA rules* (Event-Condition-Action rules)
32 while unexpected exceptions are characterized by their features. The resolute
33 workflow path will depend on the event's features that identify it in a useful way.
34 The unexpected exceptions handling is then assisted by the system providing

1 information about how similar cases have been already solved. Actually,
2 analyzing precedent cases provides useful information in order to handle new
3 ones.
4

5 Adams et al. approach is based on the definition of flexible work practices, the so-
6 called Activity Theory [AH2]. A set of principles have been derived from a sound
7 theoretical base and applied to the development of *worklets*, an extensible
8 repertoire of self-contained sub-processes that can be applied in a variety of
9 situations depending on the context of the particular work instance.
10

11 Mourão et al. propose a novel architectural framework to handle effective
12 unexpected exceptions where unstructured human interventions are necessary to
13 overcome such situations even when a WfMS is used [MA1]. The problem
14 regards with overcoming the clash with different types of control exercised by
15 WfMS. The proposed framework uses the notion of map guidance to arrange the
16 human interventions. Map guidance empowers users with contextual information
17 about the WfMS and environment, enables the interruption of model control on
18 the affected instances, supports collaborative exception handling and facilitates
19 regaining model control after the exception has been resolved.
20

21 The study of available e-business and workflow systems managing complex and
22 unexpected situations, allow the identification of which proposed approach can be
23 useful for the CO-ENV context characterized by intra and inter business processes
24 and design and supply-chains integration. The complexity and the heterogeneity
25 of the three chains business processes forces the research toward the exploration
26 of a knowledge-based workflows. The use of Case Base reasoning mechanisms
27 for managing useful and unexpected exceptions and the development of ECA
28 rules resulting from the formalization of company practice constitute the basis of
29 the proposed approach to develop the collaborative web-based dynamic workflow
30 management system.
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

4 How to dynamically manage the product development process

4.1 The proposed approach: product innovation through related dynamic processes management

The success of a product development cycle requires well-planned processes, proper tools and methods for supporting the negotiation phases and managing human resources. In such context engineers, designers and market researchers work together to achieve a compromise between all design aspects creating a product that meets customers' needs. As a result, product innovation process is not a trivial task and the product development process is often rearranged according to all involved partners features. The main goal is the achievement of product innovation maintaining a healthy company internal structure that balances innovation and continuity. The main research issues are the management of the big amount of stakeholders and the necessity to dynamically organize them in order to follow culture and trends shifts.

The use of dynamic WfMSs actually represents the answer to the above-mentioned enterprise's needs only if integrated into a collaborative environment. In order to reconfigure process workflows, once unpredictable changes occur, two activities are necessary:

- business processes modelling applying a proper technique able to identify the main criticalities;
- structuring expected and unexpected events and proper rules databases according to the way usually adopted by the company in overcoming unpredictable changes.

4.1.1 Internal and external interactions in industrial chains

Interactions of different disciplines and viewpoints are key elements in the product development process. Team members (e.g. designers and engineers), should work in a context of positive collaboration that enable them to share individual knowledge for achieving the final task. Furthermore each member generally adopts specific IT to develop product design. The level of technology expertise depends mainly on the involved enterprises dimensions. Achieving

1 efficient marketing, design and engineering interactions during the whole product
2 lifecycle is not a trivial task. The first step deals with the analysis of interactions.
3 The research starts with the investigation of the model of interaction proposed by
4 Hutchins, Hollan and Norman [HH1] focusing the attention on industrial design
5 activities. Four basic cognitive operations (i.e. exploration, generation,
6 comparison, selection) can be identified: they allow correlating cognitive tasks
7 with physical data and vice versa. Each industrial design activity is performed
8 following a cyclic process made of the four basic operations and switching from
9 an individual dimension to a team dimension. An ideal interaction model can be
10 set and an appropriate IT platform architecture identified in order to properly
11 support the transition across different cognitive operations and from individual to
12 collaborative dimensions. In such context an AI approach is useful for speeding
13 up information processing, but it has to be supported by knowledge-based
14 algorithms and structured databases. Indeed the mere AI adoption can cause
15 inefficient solutions when processes have not been analyzed and implemented into
16 the system in a correct way.

17
18
19
20
21
22
23
24
25
26
27
28
29 As a consequence, before designing the co-design platform and implement the
30 dynamic WfMSs databases, team interactions analysis is fundamental.

31
32 In the proposed approach industrial interactions are as *internal* if they involve the
33 company's staff and *external* if they involve also the design and supply chains.
34 Firms generally outsource some activities and make long-term relationships with a
35 stable set of partners to perform critical tasks such as component design,
36 manufacture, assembly and distribution.

37
38
39
40
41 A typical product development process is represented in Fig. 1. It synthesizes the
42 main phases of the typical design cycle of the three industrial chains involved in
43 the CO-ENV project. An accurate analysis of the product lifecycle of the three
44 leader companies has been carried out and similarities have been recognized in
45 order to identify a common process. Flowchart representation has been adopted
46 and the main actors of the process and the most relevant interactions with the
47 supply chain identified.

48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655

Observations highlight that the main causes of process failure and time delays depend on the difficulty to exchange and share data along the whole product development cycle.

1
2 In order to deeply analyze the industrial interaction processes and recognize the
3 main critical aspects, the 21 CO-ENV project partners have been asked to fill ad-
4 hoc questionnaires and have been interviewed in order to collect useful data.

5 The main problems lie in the difficulty to identify implicit issues in the
6 communication between the leader companies and their chains and to make
7 partners aware of the limits of adopted traditional technologies for managing
8 interaction.
9

10 A simple questionnaire has been prepared in order to analyse internal and external
11 interactions. Different questions are submitted to large and small and medium
12 enterprises as the level of computerization is very different and communication
13 mechanisms differ according to the role-played in the chains. Interviews interface
14 is different depending on the structure of the company organization: in SMEs the
15 business manager is also the technical and often the commercial manager. He/she
16 usually highlights cross-respect problems instead of large enterprise where the
17 questionnaire is submitted to different figures. The questionnaire consists of
18 twenty questions, grouped in four sections: 1) the first aims at studying the
19 collaboration with the leader company or otherwise, with the supplier by
20 identifying the product development phases where collaboration is imperative and
21 which actor is involved in the interaction, 2) the second focuses on the analysis of
22 input and output information (e.g. CAD models, technical specifications,
23 documents, etc.), 3) the third deepens adopted information and communication
24 technologies by identifying which tools are used, the level of achievement of
25 communication tasks, the involved companies departments, the quality of
26 interaction, and finally 4) the fourth part asks questions related to possible
27 improvements that partners aims at achieving by adopting a new communication
28 technology.
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46

47
48 Fig. 1: Flowchart representation of the three CO-ENV chains product development process.
49

50
51 Process indicators have been defined to carry out performance measurement (e.g.
52 exchange data file formats, file dimensions, preferred means of communication,
53 number of interactions to achieve tasks goal, frequency of similar information
54 transmission with the different means, etc.). Roles and functions of involved
55 partners were recognized and represented in the flowchart below. Main results
56 highlight that:
57
58
59
60
61
62
63
64
65

- the leader company and the supply chain have different levels of IT expertise. The majority of the suppliers are Small and Medium Enterprises (SMEs), whose capacity to use advanced Information Communication Technologies (ICT) is quite limited. They generally adopt phone, fax and physical meetings to exchange data with the leader company. Only few of them have a standalone website and use emails as a preferred mode for exchanging CAD files, digital documents and commercial orders;
- standalone websites are mainly used for marketing purposes and only occasionally for information exchange purposes;
- suppliers are generally not familiar with ICT and not aware of the potential benefits of enhancing websites and data sharing tools;
- suppliers are quite satisfied of the level of their involvement in the leader company's process but they ask for additional supporting tools to allow documents retrieval, updating and approval.

All data retrieved by questionnaires and interviews analysis are used to define the collaborative platform requirements and the main functionalities. In this preliminary phase, the above-mentioned considerations allow the definition of the approach to structure the dynamic workflow system architecture and to identify the proper test case to experiment the latest research results.

4.1.2 A knowledge-based dynamic WfMS

In order to set up a dynamic WfMS able to handle both expected and unexpected events system architecture is proposed.

Expected exceptions are considered as events that can be predicted during process modelling or traced back to the execution of precedents workflow instances. In this research context, two databases are adopted for managing expected exceptions: a *JECA rules Database* and a *Cases Exceptions Database*, formalizing knowledge related to all specific business processes.

Handling unexpected events represents an important research issue: available workflow systems are generally unable to manage them, because such events have never happened before. The problem can be overcome by a careful study of the typical solutions adopted by the company in previous cases when similar events happened. If previous cases and related solutions are classified, they can be retrieved once the system recognizes similar features. Subsequently it will

1 perform the correct actions for restoring the normal business flow and achieving
2 preset objectives according to the retrieved solution. In order to achieve the best
3 solution to the specific unexpected event the system will be able to automatically
4 arrange previous cases and propose to the workflow manager the most similar
5 solution to the current event. If the proposed solution is not accepted, he/she will
6 manually define an alternative path to solve the occurred exception.
7

8
9 Recent studies [HT1] [LS1] about the implementation of dynamic WfMSs
10 represent the starting point of the system architecture. The main novelty the
11 proposed approach consists in developing an exception handler based on
12 knowledge and practice enhanced by the companies participating to the CO-ENV
13 project. The adopted rules directly derive from the formalization of the tacit
14 enterprises' knowledge. They reflect the commonest problem-solving strategies
15 used by companies' managers once an unpredictable event occurs in their
16 everyday work. The developed system architecture (See Fig. 2) consists of two
17 main components, dedicated respectively to system administration and exceptions
18 handling. The Workflow Engine manages each component.
19
20
21
22
23
24
25
26
27
28
29

30 Fig. 2: The dynamic workflow system architecture.
31

32 Main system components are:
33

- 34 • *The Workflow Controlling tool*, that copes with activities such as starting new
35 workflows instances, ending other ones or managing the execution of initiated
36 workflows;
37
- 38 • *The Workflow Modelling tool*, that copes with the modelling of new workflow
39 templates;
40
- 41 • *The Workflow Applications*, to perform workflows instances among multiple
42 users;
43
- 44 • *The Workflow Engine* that retrieves workflow templates directly from a
45 *Workflow Database* and structures them into intra-chain and inter-chain
46 workflows. If the workflow is settled as intra-chain, it will be characterized by
47 the internal or external activities flow of the leader company relating to the
48 corresponding industrial chain. External activities deal with specific process
49 phases such as design feasibility, technical design reviews and physical
50 prototyping. On the contrary, inter-chain workflows involve various partners
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 belonging to different chains which aim to transversally develop product,
2 services or research projects;

- 3 • *The Exception Handler*, that manages unpredictable events by interfacing with
4 two databases, the *Cases Exceptions Database* and the *JECA Rules Database*.
5 The Exception Handler performs two types of activities: it checks if the
6 specific exception is included in the Cases Exceptions Database and retrieves
7 the corresponding rule from the JECA rules Database. The workflow is then
8 modified according to the identified rule and the exception is processed. If no
9 one rule can be found inside the database, the exception is classified as
10 unexpected and need to be solved by the *Unexpected Exception Handler*.

11 In order to recognize and classify the exceptions, a set of attributes have been
12 defined to identify the exception. Attributes are both generic (e.g. type of
13 exception, resource of the interested activity, etc.) and distinctive of the
14 specific workflow (e.g. product development phases - design, feasibility,
15 manufacturing, negotiation -, inter or intra chains processes). All attributes
16 allow the creation of appropriate events indexing used in rules definition and
17 recognition. For every exception contained in the Cases Exceptions Database,
18 the attributes allow the retrieval of the relative JECA rule. The attribute
19 classification will be discussed in detail in the next section.

20 In the JECA acronym, the “J” character (Justification) represents the action
21 that produces the exception, “E” (Event) indicates the type of the exception
22 and “C” (Condition) is the whole of circumstances, tied up to the attributes,
23 that must be verified to perform the “A” (Action). For a determined event “E”
24 and justification “J”, the values of its attributes allow the system to associate
25 the current exception to a previous one or a predicted one and recover it in the
26 *Cases Exceptions Database*. Adopting the corresponding rule solves the
27 exception.

- 28 • *The Unexpected Exception Handler* aims at searching for similar case studies
29 to overcome the lack of expected exception in the *Cases Exceptions Database*.
30 The system identifies if the unexpected exception is launched by an external
31 application, interfaced with the workflow engine, or by an actor involved in
32 the workflow (e.g. someone has not performed the task). The system
33 characterizes the exception by defining all its attributes thanks to a predefined
34 ontology (some attributes are assigned by the involved actors and others by
35

1 the *Workflow Engine*). The CBR mechanism is used for searching (*Browser*)
2 similar previous cases collected into a *Cases Exceptions Database (Retrieval)*.
3 The handler measures the similarity between the current event attributes and
4 all retrieved cases. Previous cases are then selected according to the similarity
5 value.
6

7
8
9 In order to arrange the retrieved similar exceptions from the *Cases Exceptions*
10 *Database*, proper algorithms are set. They allow structuring a precise
11 attributes' hierarchy by following a tree scheme (e.g. the attribute "date" can
12 be ordered in three levels: year, month and day). Each level could be
13 associated to a numeric value (e.g. year = 2 level, month = 1 level, day = 0
14 level). Exceptions are ranked on the basis of their particular attributes by
15 considering near cases in the hierarchical staircase. For example, ordering the
16 retrieved exceptions according to their date, it is possible to start from those
17 cases which present same day, month and year (coincident date) as well as
18 those cases with the same month and year (level 1) or finally those cases with
19 only the same year (level 2). Then, the Workflow Engine processes every
20 similar case.
21

22
23
24
25
26
27
28
29
30
31 The choice among all similar cases is driven by the impact of the retrieved
32 case solution has on the current workflow. Time to market delay, technical
33 performances of the replaced partners, costs increase, number of additional
34 iterations necessary to restore a regular flow are some of the proposed metrics.
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

Fig. 3: The unexpected exception handler.

1 The proposed system architecture guarantees a continuous improvement of both
2 databases and increases the knowledge of the whole system by learning from the
3 real practice. The coherence between the experienced practice and the running
4 workflows does not force the company to work according to predefined solutions,
5 assuring complete workflows flexibility.
6
7
8
9

10 **4.2 The classification of exceptions for design processes** 11 **reconfiguration**

12 The first step in the implementation of the proposed architecture is the definition
13 of a possible classification of expected and unexpected exceptions in order to
14 structure the corresponding database. The database structure and the adopted
15 attributes reflect the ways of classifying events by all involved companies. The
16 database represents the research core element: if the structure reflects and
17 synthesizes implemented business processes, it can be validated by all project
18 partners and the proposed system can run over more than one firm's application.
19 Exceptions classification starts from the direct analysis of the CO-ENV industrial
20 partners processes. In particular, interviews and questionnaires are used to
21 highlight the main difficulties in managing the product development process. The
22 performed analysis allows pointing out some interesting aspects related to
23 exception handler:
24
25
26
27
28
29
30
31
32
33
34
35

- 36 • occurring unexpected events are mainly related to times delays, costs
37 variation and product's requirements changes taking place after the
38 conceptual design stage and sometimes after detail design;
- 39 • unexpected lack of human resources (due to dismissal, resignation, changes in
40 executive jobs, etc.) usually determines a time shift that spreads over the
41 entire design cycle. As a consequence, project managers modify the normal
42 workflow and plan again the activities, assigning new roles and tasks;
- 43 • occurring errors during the pre-feasibility analysis can spread over the whole
44 design process and the final product design could not meet all initial
45 requirements. As a consequence validation phase fails and time to market
46 stretches;
- 47 • technological advances in product design generally require the introduction of
48 continuous changes in design practice and novel manufacturing processes. As
49 a consequence, the management of external interactions and suppliers'
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 involvement needs to be rearranged. This is true also when the technological
2 advances in ICT systems regard a single department: all other offices are
3 influenced and the adopted technologies must be updated or upgraded if
4 necessary. The whole organization and working conditions change.
5

6
7 It is worth to notice that all types of exceptions are strictly interconnected: a
8 change in product requirements could lead to changes in costs or lead times.
9

10 Furthermore changes importance is strictly influenced by the product lifecycle's
11 phase during which the event occurs. From the enterprise's standpoint, a change
12 in time during the feasibility analysis is less dangerous than a change during the
13 production phase.
14

15
16 The consequence of an unpredictable event can influence the whole business
17 efficiency according if the event's cause originates inside or outside the company.
18 For example if during the pre-feasibility phase a design aspect is not considered
19 and an error occurs during the detail design phase, the effect rebounds on the
20 internal technical staff. Otherwise if a supplier lacks in a specific activities, the
21 company is forced to negotiate with it and organize the work according to new
22 conditions.
23

24
25 The presented analysis supports the definition of a proper classification of
26 expected exceptions that can be successfully applied for the specific industrial
27 context. The classification is based on three main aspects (see Table 1)
28 corresponding to the generic attributes used to characterize the exception:
29

- 30 • the source of the unpredictable change, that could be *internal* if it is linked to
31 the inner company's interactions or *external* if it is originated within the
32 design or supply-chain;
33
- 34 • the type of the unpredictable change, that is settled according to its nature.
35 *Technical/technological* exceptions are related to adjustments in the ICT
36 systems, evolution in the adopted manufacturing processes and advances in
37 the technologies supporting the development cycle. *Economical* and *temporal*
38 exceptions depend respectively on variations in costs of services, products, or
39 components and on possible delays in the whole product development. Finally
40 *customer-oriented* and *marketing* exceptions concern with changes in
41 product's aesthetical, functional or technical requirements or customers'
42 lifestyle and preferences;
43

- the importance of the change for business efficiency. It can be *high, medium* or *low* according to the specific process activity and actors involved.

Table 1: Expected exceptions database structure and related generic attributes.

As mentioned before exceptions can also be characterized by distinctive attributes concerning with the phase when the event occurs.

4.3 Differences between dynamic and static workflows

After presenting the general structure of the proposed WfMS architecture, the research examines a practical industrial case in order to describe how the proposed system really works. The test-case allows highlighting the differences between two different approaches: static and dynamic. The chosen example deals with an unexpected event and the way through which both approaches address the problem. As mentioned before unexpected changes in times, costs and product requirements can dramatically lead to the whole design process reengineering.

The result is a loss in time if the process is not quickly managed.

The observation of the involved companies' practice highlights that one of most recurring events regards with errors in production planning schedule. Errors can be due both to an internal source (for instance a change in the company's manufacturing scheduling due to a change of the production requirements) and by an external source (i.e. a change in supplier's manufacturing scheduling). In both cases the detail feasibility analysis must be performed again and consequently all design phases reviewed in order to obtain the production plan validation: decisions in the detail feasibility analysis influence the design cycle and the production plan.

The flowchart representation allows the identification of the product development phases involved in the production planning schedule: detail production planning and feasibility analysis stage (See Fig. 4, at left). UML diagram is used to represent the sub-processes in order to highlight actors' roles, performed activities and exchanged documents (See Fig. 4, at right).

The main process activities are contained into round boxes while the shared data into square boxes; black thin lines are used to represent traditional flows, thick red lines static workflow paths and finally, thick green lines the proposed paths

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

obtained by applying the dynamic workflow. All process entities are arranged into columns (*swimlines*) according to the actors involved in the related tasks.

When the identified unpredictable event occurs, time approval fails and different paths may be adopted in case of static and dynamic workflow. Number 1 and 2 represent respectively the different scenarios: when the source of scheduling error is internal and when it is external to the company's organization.

The first described situation concerns with errors in production planning schedule caused by a company's internal source. In order to manage a possible variation in the production requirements, the company is forced to modify the internal manufacturing schedule defined in the feasibility-planning phase. As a consequence company engineers ask the involved supplier for a different scheduling plan: changes can be in terms of time and resources. The problem regards with the coordination between the old plan and the new one proposed by the supplier. If the supplier is able to comply with the new timing, the process goes on following the normal flow as showed by black thin lines. Otherwise, if an agreement between the company and the supplier cannot be achieved, the approval of the new manufacturing schedule fails. In case of static WfMS application, the system continues to warn the supplier to prepare a new manufacturing plan: it falls in a process loop that forces the workflow manager to stop the process and manually reconfigure it according to his/her expertise (see Fig. 4, at bottom). The problem is generally solved by continuous interactions between partners until either a new detailed feasibility plan has been found or the supplier has been replaced. Interactions are performed via traditional means of communication such as fax, emails, phone, etc. They are difficultly traced and misunderstandings may happen. Once the solution has been achieved the task manager conveys the new plan to the technical staff and to the workflow manager that reconfigures the static workflow according to the received guidelines. As a consequence time to market stretches and subsequent errors chance improves. Static WfMS are not able to agile answer to the unpredictable event: company's actors need to manually modify the process and carry on time consuming activities.

On the other hand a knowledge-based dynamic WfMS can provide a quick response to the unpredictable events minimizing time delays. The proposed system architecture allows the automatic identification of an alternative, the

1 configuration of a new workflow path that optimizes costs, human resources,
2 number of interactions, etc. and finally allows restarting the workflow by
3 communicating the adopted new plan to the involved actors (see Fig. 4, at right).
4 When the production planning schedule needs a variation, the workflow manager
5 assigns the attributes to the occurring event. Attributes allow the Workflow
6 Engine to identify a proper problem solution automatically retrieving it from the
7 systems databases. The used example deals with an internal exception (source)
8 which is occurred in the manufacturing schedule activity (phase), which is related
9 to technological aspects (type) and which assumes a great relevance (level of
10 importance) due to the fact that it is happened at the end of the product
11 development process. Once the attributes have been set, the *Exception Handler*
12 checks if the exception has already been included in the *Cases Exception*
13 *Database*. In this case, the corresponding rule is retrieved from the *JECA Rules*
14 *Database* and a new workflow path is identified for processing the event.
15 Otherwise, if the exception is considered unexpected, it is processed by the
16 *Unexpected Exception Handler* in order to search for similar cases. For instance,
17 the system could identify a new supplier and an “order request” is send to
18 different company’s suppliers in order to find the firm that better matches the new
19 requirements. Then, the system automatically communicates the schedule and the
20 chosen supplier to all actors involved in the workflow assigning new roles. Once
21 the process is restarted and the detail feasibility analysis has been carried out, the
22 workflow goes on following the predefined path.
23 A similar behaviour between static and knowledge-based dynamic workflows can
24 be verified in the case of production planning schedule change due to an external
25 source. In this context the involved supplier may realize that he/she cannot be able
26 to meet the deadline.
27 This can be due to supplier’s internal troubles or problems with other customers.
28 As the static workflow falls into a loop, the proposed dynamic workflow identifies
29 the exception source as external, classifies the event as expected or unexpected
30 and looks for a set of cases and corresponding rules to overcome the problem.
31 The two discussed examples highlight that exception handling is a very tough
32 problem in the modern industry and requires deep application domain knowledge
33 in order to achieve effective solutions.
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 The proposed knowledge-based approach has been implemented into a
2 commercial WfMS (softFlow by Metisoft) by developing a plug-in application for
3 the exception handling.
4

5 Preliminary experimentations have been carried out to support the development of
6 a project of a new household appliance involving two of the CO-ENV chains. The
7 system performance is evaluated from multiple points of view: interoperability
8 with ICT adopted by the involved companies, time to perform specific workflow
9 tasks, tasks control by all team partners, time for reconfiguring workflows once an
10 event occurs, activities synchronization, time estimation in case of loop cycles,
11 etc.
12

13 Achieved results points out some advantages in implementing the proposed
14 research approach and relative dynamic workflow management tools:
15

- 16 - Workflow adaptability without unexpected crash o loop cycles;
- 17 - Automation in the rapid configuration of process models according to the
18 occurred event and the retrieved solving rule;
- 19 - Support to the system administrator in rapid decision-making based on
20 previous adopted solutions;
- 21 - Automation of numerous operations and consequent reduction of time for
22 handling exceptions to predefined workflow.
23

24 The analysis of the test case demonstrates that a dynamic WfMS represents a
25 really useful tool for companies in performing critical activities only if supported
26 by a knowledge base that reflect the companies practice in solving unpredictable
27 events. It enables to rapidly react to changes in a well-structured way, support the
28 workflow manager to choose the best solution according with previous test cases
29 and sensibly reduce process workflow reconfiguration times.
30

31 Fig. 4: Differences between the proposed dynamic and traditional static WfMS on managing
32 unpredictable events. UML Activity Diagrams are used to model the sub-process involved in the
33 change.
34

35 Experimentations, however, point out two main system limitations that need to be
36 overcome:
37

- 38 - the adopted similarity measurement techniques do not completely match
39 with the ways the project manager assesses an unpredictable event during
40

1 the design process and then retrieve the solution thanks to his/her personal
2 experience;

- 3
4 - the techniques for the evaluation of the changes impact on running
5 workflow in order to better support decision-making during process
6 reconfiguration.
7
8
9

10 **Conclusion and future works**

11
12
13 Competitiveness heavily depends on the capacity of industrial companies to
14 quickly react to unpredictable events that can occur during the whole product
15 development cycle. Agility concepts and strategies can be implemented thanks to
16 the creation of a collaborative environment integrated with a dynamic WfMS. It
17 provides a space for improving communication and sharing knowledge. In the
18 2007 the CO-ENV project arose from these general considerations involving 21
19 large, medium and small enterprises. This paper is a step forwards the definition
20 of a dynamic WfMS architecture that will be integrated within a co-design web-
21 portal, opened to all project partners. After an overview of the most significant
22 approaches in literature, a possible WfMS structure and its main functionalities
23 are illustrated. The implemented system can be efficient only if expected and
24 unexpected exceptions are handled and the resolving ways are based on rules
25 directly deriving from the formalization of the companies' tacit knowledge and
26 practice. Furthermore, the system databases structure depends on the study of
27 concrete interactions and exceptional cases that usually occur in the three
28 industrial chains involved in the project. Typical exceptions are presented in
29 order to exemplify differences between static and dynamic workflows behaviour.
30 It can be observed that the dynamic one may provide a more flexible organization
31 to companies because problems may be semi-automatically overcome by the
32 system itself. The possibility to evaluate the impact of an unpredictable event is
33 fundamental to improve the business capacity to react to changes.
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50

51 The main scientific contributions can be synthesized as follows:

- 52 • the proposed web-based platform for co-design enhances communication
53 between enterprises at the level of intra and inter chains involving both
54 suppliers, designers and the whole leader company organization. Available
55 information communication technologies generally focus only on
56 collaboration across the supply chain;
57
58
59
60
61
62
63
64
65

- moreover, the supply chain is generally not involved in the leader company processes for the low level of interactivity provided by the adopted communication means. Static workflows are designed according to the specific leader company organization that is very different from that adopted by the supplier. The proposed dynamic workflow platform allows participants to interact without harnessing them in predefined schemas. It does not require the deployment of complex PLM systems difficult to implement in small and medium enterprises as they are strongly document-oriented, have a structured and not much customizable data model and suffer from inter-enterprise integration problems;
- Processes are configured according to practice and unexpected events are handled according to successful precedents. The proposed workflow system is based on knowledge instead of available static workflows;
- The architecture described to dynamically manage workflows; it's able to formulate different solutions to overcome the unexpected exception, allowing the process manager to customize the solution in accord with specific company's needs. The best one is stored into the Cases Exceptions Database and the system learns this case, widening its knowledge.

Another interesting novelty is represented by the functionality of the system to assess the impact of the proposed solutions within the workflow. It aims at choosing the best solution among alternative ones. Current commercial systems are not provided with similar functionalities for improving workflows management.

Furthermore, the main contribution consists in the way of put all faced issues together. The effort is to elaborate a web-based platform able to solve communication, interaction, and process management problems integrating the leader companies with its supply chains, enhancing knowledge sharing among parallel chains.

Some novelties need further study, in particular the one related to the implementation of distributed and knowledge-based workflow across complex design and supply-chains. A better development of the platform is required to integrate it within different PLM solutions and commercial WfMS. Future work will be mainly focused on the development of specific algorithms for the evaluation of the changes impact on running workflows.

1
2
3 Acknowledgements

4 The research reported in this paper was supported by the Italian Ministry of
5 Economic Development and the CO-ENV R&D consortium (www.coenv.it)
6
7
8

9
10 **References**

- 11 [AE1] Adams M.J., Edmond D. and ter Hofstede A.H.M. The Application of Activity Theory to
12 Dynamic Workflow Adaptation Issues. In 7th Pacific Asia Conference on Information Systems,
13 Adelaide - South Australia, 2003.
14
15 [AG1] Aziz H., Gao J., Maropoulos P. and Cheung W.M. Open standard, open source and peer-to-
16 peer tools and methods for collaborative product development. In Computer in Industry, 56: 260-
17 271, 2005.
18
19 [AG2] Alonso G., Gunthor R., Agrawal D., El Addadi A. and Mohan C. Exotica/FMDC: Handling
20 Disconnected Clients in a Workflow Management System. In Proceedings of the 3rd Conference
21 on Cooperative Information Systems, Vienna, 1995.
22
23 [AH1] Adams M.J., ter Hofstede A.H.M., Edmond D and van der Aalst W.M.P. Dynamic and
24 Extensible Exception Handling for Workflows: a Service-Oriented Implementation. BPM Center
25 Report, BPM-07-03, BPMcenter.org, 2007.
26
27 [AH2] Adams M., ter Hofstede A.H. M., Edmond D. and van der Aalst W.M.P. Facilitating
28 Flexibility and Dynamic Exception Handling in Workflows through Worklets. In Proceedings 17th
29 International Conference on Advanced Information Systems Engineering (CAiSE'05) Forum,
30 Porto – Portugal: 45-50, 2005.
31
32 [BH1] Bryan-Kinns N., Healey P.G.T. and Leach J. Exploring Mutual Engagement in Creative
33 Collaborations. In the Proceedings of the International Conference on Creativity and Cognition,
34 Washington, USA, ACM Press.
35
36 [BT1] Belkadi F., Troussier N., Eynard B. and Bonjour E. Collaboration based on product
37 lifecycles interoperability for extended enterprise. In International Journal of Interactive Design
38 and Manufacturing, 4(3): 169-179, 2010.
39
40 [CH1] Cichocki A., Helal A., Rusinkiewicz M. and Woelk D. Workflow and Process Automation:
41 Concepts and Technology. Kluwer Academic Publishers, 1997.
42
43 [D1] D’Averni R.A. Hyper competition – Managing the Dynamics of Strategic Manoeuvring. The
44 Free Press, 1994.
45
46 [D2] Davenport T.H. Process Innovation: Reengineering work through Information Technology.
47 Harvard Business School Press, Boston - USA, 1993.
48
49 [D3] Dreiling A., Rosemann M., van del Aalst W. and Sadiq W. From Conceptual Process Models
50 to Running Systems: A Holistic Approach for the Configuration of Enterprise System Processes.
51 In Decision Support Systems, In Press doi: 10.1016/j.dss.2007.02.007, 2007.
52
53 [GH1] Georgakopoulos D., Hornick M. and Sheth A. An Overview of Workflow Management:
54 From Process Modelling to Workflow Automation Infrastructure. In Distributed and Parallel
55 Databases, 3(2): 119-154, 1995.
56
57
58
59
60
61
62
63
64
65

1 [HA1] Hagen C., Alonso G. Flexible exception handling in process support systems. In Technical
2 report no.290, ETH Zurich, 1998.

3 [HT1] Hwanga S., Tangb J. Consulting past exceptions to facilitate workflow exception handling.
4 In Decision Support Systems 37: 49-69, 2004.

5 [JB1] Jablonski S., Bussler C. Workflow Management: Modeling Concepts, Architecture and
6 Implementation. International Thomson Computer Press, 1996.

7 [LS1] Luo Z., Sheth A., Kochut K. and Miller J. Exception handling in workflow systems. In
8 Applied Intelligence, 13(2): 125-147, 2000.

9 [M1] Merienne F. Human factors consideration in the interaction process with virtual
10 environment. In International Journal of Interactive Design and Manufacturing, 4(2): 83-86, 2010.

11 [MA1] Mourão H., Antunes P. Supporting Effective Unexpected Exceptions Handling in
12 Workflow Management Systems. 2007 ACM symposium on Applied computing table of contents,
13 Seoul - Korea. Proceedings of the conference: 1242-1249, 2007.

14 [MF1] Mejia-Gutierrez R., Fischer X. and Bennis F. A Tutor Agent for supporting distributed
15 knowledge modelling in interactive product design. In International Journal of Intelligent Systems
16 Technologies and Applications (IJISTA), 4(3): 399-420, 2008.

17 [ML1] Mondragon A.C., Lyons A.C., Kehoe D.F. Assessing the value of information systems in
18 supporting Agility in high tech manufacturing enterprises. In International Journal of Operations
19 and Production Management, 24(12): 1219-1246, 2004.

20 [PH1] Patel N., Hlupic V. Dynamic Business Process Modelling (BPM) for business process
21 change. In International Journal of Simulation Systems, Science and Technology, 2(2): 51-64,
22 2001.

23 [PG1] Preiss K., Goldman S.L., Nagel R.N. Cooperate to compete: building agile business
24 relationship. Van Nostrand Reinhold Ed., 1996.

25 [S1] Aguilar-Savén R.S. Business process modelling: Review and framework. In the International
26 Journal of Production Economics, 90: 129-149, 2004.

27 [SC1] Sheth A., Georgakopoulos D., Joosten S., Rusinkiewicz M., Scacchi W., Wileden J. and
28 Wolf A. Report from the NSF Workshop on Workflow and Process Automation in Information
29 Systems. Technical report, University of Georgia, UGA-CS-TR-96-003, 1996.

30 [SM1]. Strong D.M., Miller S.M. Exceptions and Exception Handling in Computerized
31 Information Processes. In ACM Transactions on Information Systems, 13(2): 206-233, 1995.

32 [SO1] Sadiq S.W., Orłowska M.E. On Capturing Exceptions in Workflow Process Models.
33 Proceedings of the 4th International Conference on Business, Information Systems. Poznan -
34 Poland, 2000.

35 [TJ1] Tseng M.M., Jiao J. Mass customization. In Handbook of industrial engineering, Salvendy
36 Ed: 684-709. Wiley, New York, 2001.

37 [VK1] Vojevodina D., Kulvietis G. and Bindokas P. The Method for E-business Exception
38 Handling. Proceedings of the 5th International Conference on Intelligent Systems Design and
39 Applications (ISDA'05): 203-208, 2005.

40 [WF1] Workflow Management Coalition. The Workflow Reference Model. Document Number
41 TC00-1003, Issue 1.1, 1995.

42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

***Title Page**

[Click here to download Title Page: revised title page.doc](#)

answers to reviewers

[Click here to download Supplementary Material: answer to reviewers \(2rev\).doc](#)