

Alma Mater Studiorum Università di Bologna
Archivio istituzionale della ricerca

Characterization and evaluation of the influence of an alginate, cocoa and a bilayer alginate-cocoa coating on the quality of fresh-cut oranges during storage

This is the submitted version (pre peer-review, preprint) of the following publication:

Published Version:

Glicerina, V., Siroli, L., Betoret, E., Canali, G., Dalla Rosa, M., Lanciotti, R., et al. (2022). Characterization and evaluation of the influence of an alginate, cocoa and a bilayer alginate-cocoa coating on the quality of fresh-cut oranges during storage. JOURNAL OF THE SCIENCE OF FOOD AND AGRICULTURE, 102(11), 4454-4461 [10.1002/jsfa.11799].

Availability:

This version is available at: <https://hdl.handle.net/11585/893606> since: 2022-09-06

Published:

DOI: <http://doi.org/10.1002/jsfa.11799>

Terms of use:

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).
When citing, please refer to the published version.

(Article begins on next page)

**Improvement of quality, sensory properties and shelf life of
 fresh cut oranges by using a bilayer cocoa-sodium alginate
 coating**

Journal:	<i>Journal of the Science of Food and Agriculture</i>
Manuscript ID	JSFA-19-1604
Wiley - Manuscript type:	Research Article
Date Submitted by the Author:	23-May-2019
Complete List of Authors:	Glicerina, Virginia; Università degli Studi di Bologna, Interdepartmental Centre for Agri-Food Industrial Research; Canali, Giada; University of Bologna, Interdepartmental Centre for Agri-Food Industrial Research Siroli, Lorenzo; University of Bologna, DISTAL Dalla Rosa, Marco; University of Bologna, Food Science Lanciotti, Rosalba; University of Bologna, Food Science Romani, Santina; University of Bologna, Food Science
Key Words:	edible coating, Double coating, cocoa, Alginate, Oranges, Shelf-life

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
22

Improvement of quality, sensory properties and shelf life of fresh cut oranges by using a bilayer cocoa-sodium alginate coating

RUNNING TITLE: IMPROVEMENT OF QUALITY OF FRESH CUT ORANGES BY USING A BILAYER COATING

Virginia Glicerina^{a,*}, Giada Canali^a, Lorenzo Siroli^a, Marco Dalla Rosa^{a,b}, Rosalba Lanciotti^{a,b} and Santina Romani^{a,b}

^a *Interdepartmental Centre for Agri-Food Industrial Research, Alma Mater Studiorum, University of Bologna, Via Quinto Bucci, 336, 47521 Cesena (FC), Italy*

^b *Department of Agricultural and Food Sciences, Alma Mater Studiorum, University of Bologna, Piazza Goidanich 60, 47521 Cesena (FC), Italy*

* Corresponding author: Virginia Glicerina, Interdepartmental Centre for Agri-Food Industrial Research, Alma Mater Studiorum, University of Bologna, Via Quinto Bucci, 336, 47521 Cesena (FC), Italy. E-mail: virginia.glicerina2@unibo.it

This is the preprint (submitted version) of the article *Characterization and evaluation of the influence of an alginate, cocoa and a bilayer alginate-cocoa coating on the quality of fresh-cut oranges during storage*, by Virginia Glicerina, Lorenzo Siroli, Ester Betoret, Giada Canali, Marco Dalla Rosa, Rosalba Lanciotti, Santina Romani, which is published in its final version in JOURNAL OF THE SCIENCE OF FOOD AND AGRICULTURE, Volume 102, Issue 11, pages 4454-4561, DOI <https://dx.doi.org/10.1002/jsfa.11799>

1
2
3 23
4
5 24
6
7 25
8
9 26
10
11 27
12
13 28
14
15 29
16
17 30
18
19 31
20
21
22 32
23
24 33
25
26 34
27
28
29 35
30
31 36
32
33 37
34
35 38
36
37 39
38
39 40
40
41 41
42
43 42
44
45 43
46
47 44
48
49 45
50
51
52 46
53
54 47
55
56 48
57
58 49
59
60

Abstract

BACKGROUND

Fresh-cut products are ready-to-use goods which retain the fresh characteristics of raw produce. However, numerous factors restrict the quality and shelf-life of fresh-cut products. One of the most promising, convenient and safe technologies to preserve the quality and to prolong the shelf-life of fresh fruits and vegetables is the application of edible coatings.

RESULTS

The aim of this study was to investigate the effects of different coatings (alginate-based, cocoa-based and a combination of them) on physico-chemical, microbiological and sensory characteristics of fresh-cut oranges during storage. Preliminary rheological analyses were performed on coatings in order to characterize them. The three different coated orange samples were packaged in polyethylene terephthalate trays under atmospheric conditions and stored for 10 days at 6°C. During storage, all samples were analysed for water activity, moisture, colour, texture, microbiological analyses and sensory quality. Orange samples coated with sodium alginate maintained the highest quality characteristics in terms of texture and microbiological properties, but not from a sensory point of view. Samples coated only with cocoa presented very high sensory attributes, but the lowest microbiological and textural quality. Samples covered in both alginate and cocoa demonstrated the best quality parameters throughout the whole storage period, including high sensory characteristics and the lowest microbiological cell loads (yeast and mesophilic aerobic bacteria under the threshold limit of 6.0 log cfu/g).

CONCLUSIONS

The bilayer coating represented the best solution in order to develop a new ready to eat fresh oranges with both high textural and sensory attributes and prolonged shelf life

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Keywords: edible coating, double coating, cocoa, alginate, oranges, rheology, shelf-life.

INTRODUCTION

Fresh-cut products are ready-to-use goods which retain the fresh characteristics of raw produce.¹ Raw and minimally-processed fruits and vegetables are sold to consumers in a ready-to-use or ready-to-eat form. This type of product does not generally contain preservatives or antimicrobial substances and rarely undergoes any heat processing before consumption.² The food market evolves with new products and changing trends, but fresh-cut ones remain at the top of the list of products that meet the needs of many consumers.³ However, numerous factors restrict the quality and shelf-life of fresh-cut products. During storage, in fact, they undergo significant deteriorations and as a consequence decay of their sensory (e.g. flavour, colour, texture) and nutritional value. Water loss is the primary factor that involves deterioration of fruits and vegetables and may result in soft texture, translucency and loss of nutritional value and sensory attributes.^{4,5} Researches aimed to retard the quality loss of fresh-cut fruits, maintaining their safety in terms of microbial growth are of great interest for companies involved in their production and distribution.^{6,7} Different approaches have been employed to preserve fresh-cut product quality during shelf-life, including modified atmosphere packaging, chemical treatments such as calcium dips and physical treatments such as gamma irradiation, pulse light, ozone, cold plasma, and high pressure pre-treatment combined with vacuum impregnation.^{8,9,10} One of the most promising, convenient and safe technologies to preserve the quality and to prolong the shelf-life of fresh fruits and vegetables is the application of edible coatings.¹¹ These coatings are formed from a suspension of a thickening agent, which after application on the product forms a film that acts as a barrier to gas exchange and water loss by modifying the atmosphere and slowing fruit ripening.¹² Edible coatings can be classified in three categories with regards to the nature of their components: polysaccharides (alginate, gellan, etc...), lipids (paraffin, beeswax, chocolate, etc..), proteins (corn zein, wheat gluten, etc...) and composites, made up from combining substance from previous

categories (e.g. gelatin and fatty acids, methylcellulose and fatty acids, etc.).¹³In recent years researches are focused on the application of alginate as edible coating on fresh-cut fruits, for its characteristics of good transparency and resistance to gas exchange.¹²A lot of studies have been performed on the influence of alginate coating alone or in combination with other substances on the chemico-physical and microbiological characteristics of different type of fresh-cut fruit, such as pineapple,¹⁴ pears,¹⁵ apples,^{16,17,18} mango,¹⁹ papaya,²⁰ tomato fruit,²¹ melon^{22,23} and blueberries.²⁴

However, to our knowledge, no studies have been performed on the influence of edible coating alginate on the physico-chemical, sensory and microbiological properties of fresh cut orange products. Fresh cut oranges were selected as samples to cover, considering their high nutritional values and quality that undergoes to significative loss, during storage, because of their sensitive to microbiological growth, water loss and to low temperature, especially after cutting. For this reason, in the first part of this study, the influence of a sodium alginate-based coatings on the main quality characteristics of orange fresh-cut products is evaluated. However, the application of coatings without compromising sensory attributes of fresh-cut fruits is not always achieved, and therefore needs further studies.²⁵ Moreover, companies requested innovative products, with improved sensorial characteristics, maintaining high quality parameters for longer storage times, for this reason, in addition, cocoa as an alternative edible coating was examined. To our knowledge, few studies were focused on the possibility to use cocoa based coatings, normally used in the bakery and confectionery industries, to preserve fresh cut fruits. In the 1988, Biquet and Labuza²⁶ performed a research with the purpose to evaluate the moisture permeability properties of a cocoa coating without any kind of applications on food system. Recently Khan²⁷ et al., and Meza et al. 2018²⁸ reported some studies respectively focused on the efficacy and the deposition behaviour of a cocoa coating applied by electrospraying, and on its rheological and adsorption properties. Only two works deal with the application of cocoa coatings on fruits products, where in the first one Gounga et al. 2008,²⁹ applied two cocoa coatings on dried chestnut and analysed them for nutritional and microbiological properties only after covering. While Glicerina et al., 2019³⁰ applied two cocoa based coating on fresh cut fruits

(apples and grapes) and their influence on the main quality characteristics, during storage, was evaluated. However, obtained results showed that in comparison to uncoated samples, cocoa based coatings gave a positive effect only on the sensory properties of fresh cut fruit samples during storage, showing a shelf-life very similar to uncoated ones; even if grapes maintained better quality properties than apples probably because the presence of their natural skin that promoted a protective effect.

The absence of an intermediate coating between fruit and cocoa did not contribute to extend the shelf life; to fill the mentioned gap in the present research two layers of coating were used. For this reason, in this study, the effects of different coatings, alginate-based, cocoa-based and a combination of them (as double coating), on the physico-chemical, microbiological and sensory characteristics of fresh-cut oranges during storage were evaluated.

MATERIALS AND METHODS

Raw materials

Fresh-cut oranges were obtained from the consortium Agribologna (Bologna). The variety of orange was *Navel*. The oranges had a refractive index of 11.3 °Brix and an acidity of 0.83 ml/ 100 ml citric acid. Two types of coatings were employed to cover fresh-cut orange samples; one sodium alginate based, the other cocoa based. The formulations of sodium alginate coating, obtained in laboratory by adding calcium ascorbate and solved in distilled water, and that made with a commercial cocoa realized with Cocoa Butter substitutes (CBS) are reported in Table 1. The sodium alginate formulation was realized according to Zhong et al.,³¹ and Fu et al.,³²

Sample preparation

The orange fruits were manually peeled and subsequently obtained slices were separated and subjected to a peroxiacetic acid solution dip (200 ppm) to prevent microbial contamination. After drying at 4°C for 10 minutes, slices were divided in three parts of irregular shape. Subsequently, the orange pieces were covered with the different coatings: cocoa cream (Co), sodium alginate (Al) and both combined (Co+Al). This last coating type were made by covering each orange slice with a first layer of alginate and after drying (at 4°C for 30 minutes) a second one of cocoa cream, preliminary obtained by melting dark chocolate substitute in a microwave at 750 watts for 1 minute. These conditions were chosen after preliminary trials, in order to avoid modification in the product structure, in accordance with Stortz & Marangoni³³ and Glicerina et al.,³⁴ 2 grams of sodium alginate solution plus 2 g of melted cocoa coating were used to cover each piece of fruit. In all coated fruits the single coating layer had a thickness of 1.0 ± 0.1 mm. Each orange piece was completely dipped in each coating type, removed with tweezers and left to dry in a cold room at 4°C for 15 minutes. After cooling, approximately 100 g of each orange sample was packed in different PET trays closed with polypropylene (PP) film at medium barrier to oxygen. In specific, the PET tray had a thickness of 3 mm, an oxygen transmission rate (OTR) of 60 cm³/m²/day/atm and a water transmission rate of 27 cm³/m²/ day/atm, while the PP film presented a thickness of 30 µm and an oxygen and a water transmission rate respectively of 860 cm³/m²/ day/atm and 19 cm²/m²/ day/atm, in both cases measured at 23°C. All samples were stored at 6°C for 10 days. Three trays of each sample were analysed at six different times: after 0 (T0), 1 (T1), 2 (T2), 3 (T3), 6 (T6) and 8 (T8) days, chosen after preliminary trials. Control sample was represented by orange pieces without coating, processed and stored at the same conditions. Samples were named: Orange C, control without coating; Orange Al, coated with sodium alginate; Orange Co, coated with cocoa cream; and Orange Al+Co, coated with double layer of sodium alginate and cocoa cream.

1
2
3 150
4
5
6 151
7
8
9 152
10
11
12 153
13
14
15 154
16
17 155
18
19
20 156
21
22 157
23
24 158
25
26
27 159
28
29 160
30
31 161
32
33
34 162
35
36 163
37
38
39 164
40
41
42 165
43
44
45 166
46
47
48 167
49
50
51 168
52
53
54 169
55
56 170
57
58 171
59
60 172

METHODS

Rheological analysis on fruit coatings

Rheological measurements were carried out on both cocoa and alginate coatings in order to characterize them. Measurements were performed at 40 °C using a controlled stress–strain rheometer (MCR 300, Physica/Anton Paar, Ostfildern, Germany) equipped with a system of coaxial cylinders (CC27). The rheological behaviour of coatings was analysed in steady state conditions. After a pre-shearing of 500 s at 5 s⁻¹, viscosity was measured by increasing shear rate from 2 to 50 s⁻¹ within 180 s and taking 18 measurements at different points.³⁵ The obtained flow curves, on the basis of preliminary trials, were fitted according to the Casson model that showed the best fit, compared against other rheological models. The Casson model is a structure-based model derived from the analysis of a structure and its kinetic change, usually employed to study the rheological behaviour of food matrices characterized by the presence of a yield stress.^{36,37}

This model is described by the following equation:

$$\tau^{0.5} = \tau_0^{0.5} + \eta_{PL} \gamma^{0.5} \tag{1}$$

where τ_0 is the yield stress at the zero point and η_{PL} is the so-called plastic viscosity ³⁴

Moisture and Water Activity

Moisture content and water activity were determined at each storage time, separately on the fruit samples and cocoa coatings (after removing it from each fruit piece), in order to evaluate possible migration phenomena between them. In samples coated with sodium alginate analyses were performed on the whole fruit because of it was not possible to separate the coating from the fruit

pieces because of the high tackiness of the sodium alginate. Moisture content was determined gravimetrically by difference in weight before and after oven drying at 70 °C, until constant weight was reached. The moisture content was calculated as follows:

$$\text{Moisture content \%} = 100 - ((W_f - W_d / W_f) * 100)$$

W_f = weight fresh sample

W_d = weight dry sample

The water activity values of ground fruits and cocoa coatings were obtained by using a dew point hygrometer, AquaLab-Water Activity Meter (mod. SERIES 3TE. Decagon Device, Inc., Nelson Court, NE). Three measurements were carried out from each sample (Orange C, Orange AI, Orange Co, Orange AI+Co) and their respective cocoa coating, when present, after separation from fruit pieces, at each storage interval for both moisture and water activity analyses.

Textural analysis

Evaluation of firmness and fracturability was conducted with a penetration test by means of a Texture Analyser mod. TA-HDi500 (Stable Micro Systems, Surrey, Godalming, UK), equipped with a 5 Kg load cell and a 6 mm diameter stainless steel probe. Test speed was 1 mm s⁻¹ with a 6 mm depth of penetration.³⁸ The maximum peak of the curve, obtained during penetration, was used as the firmness value F (N). The distance between the origin of curve till the point until the end of the penetration, is an index of the fracturability (N*s/mm). Results were expressed as the average of ten measurements for each sample.

1
2
3 196 **Microbiological analysis**
4
5
6 197 Microbiological analyses were performed after 1, 3, 6 and 9 days of storage. For each type of sample,
7
8 198 30 g of whole product were placed in sterile bags and with 60 mL of sterile saline solution (0.9%
9
10 NaCl) and subsequently homogenized for 2 minutes in Stomacher (model Lab BlenderSeward,
11 199 London, UK). Subsequently, the samples were serial diluted into sterile physiological solution
12
13 200 according to the expected microbial cell loads of the samples. The total loads of lactic bacteria, yeasts,
14
15 201 molds, total mesophilic aerobic bacteria, total psychrotrophic aerobic bacteria and total coliforms
16
17 202 were determined. In particular, yeasts were counted on Yeast extract Peptone Dextrose medium
18
19 203 (YPD) (Oxoid Ltd, Basingstoke, United Kingdom), total coliforms on Violet Red Bile Agar (Oxoid
20
21 204 Ltd, Basingstoke, United Kingdom), lactic acid bacteria on De Man Rogosa and Sharpe (MRS)
22
23 205 (Oxoid Ltd, Basingstoke, United Kingdom), total aerobic mesophilic and psychrotrophic bacteria on
24
25 206 Plate Count Agar (PCA) (Oxoid Ltd, Basingstoke, United Kingdom) and mold on Malt Extract Agar
26
27 207 (MEA) (Oxoid Ltd, Basingstoke, United Kingdom). In particular, yeasts, molds and total aerobic
28
29 208 mesophils were incubated at 30 °C for 48h, total coliforms and lactic bacteria were incubated at 37
30
31 209 °C for 24h, while psychrotrophic aerobic bacteria were incubate at 10 °C for 7 days.
32
33
34
35
36
37
38
39 211
40
41
42 212 **Sensory analysis**
43
44
45 213

46 214 A panel composed by 80 tasters (female and male, aged from 25 to 52 years) was asked to evaluate
47
48 215 the four samples and to rate their preference using a 9-point hedonic scale (1 = extremely dislike; 9
49
50 216 = extremely like),³⁹ immediately after treatment (T0) and after 3 days of storage. The others storage
51
52 217 times were not considered due to the limit of microbiological acceptability, according to
53
54 218 microbiological analysis results. The attributes rated were: external and inner appearance, smell,
55
56 219 firmness, flavour and overall acceptability. The test was performed in laboratory scale and conducted
57
58 220 in individual booths.⁴⁰ Orange samples were served to the panellist in a randomized order.
59
60

STATISTICAL ANALYSIS

Analysis of variance (ANOVA) and the test of mean comparisons according to Fisher's least significant difference (LSD) with a 0.05 level of significance were applied to find out significant differences among the different samples. The statistical package STSG Statistica for Windows, version 6.0 (Statsoft Inc., Tulsa, OK, USA) was used.

RESULTS AND DISCUSSION

Rheological characteristics of coatings

In Figure 1 the flow curves of the two different edible coatings, sodium alginate and cocoa, are showed. In both samples, apparent viscosity decreases with the increase of the shear rate, indicating pseudoplasticity. This behaviour can be explained by the structural breakdown of the molecules due to the hydrodynamic forces generated and to the increased alignment of the constituent molecules.⁴¹ Alginate coating presents the highest viscosity, with initial values around 50.000 mPa, cocoa coating had an initial apparent viscosity values around 5.000 mPa. Moreover, in order to better explain the rheological values obtained by the flow curves, the Casson yield value and the Casson plastic viscosity parameters were calculated applying the Casson model, results are reported in Table 2. All data were well fitted by the Casson model, providing high determination coefficients (R^2), comprising between 0.98 and 0.99. Alginate coating presented highest yield stress and viscosity values compared to cocoa one, underlining how the amount of energy needed to start flow was the highest in the former. Sodium alginate is made up of d-mannuronic and l-guluronic acids and contains numerous hydrophilic molecular groups.^{42, 31} When water is added to sodium alginate, strong bonds between molecules are created, giving arise to a tighter and more compact structure. High sodium alginate

viscosity values may also be achieved through the addition of calcium ascorbate which, as has been demonstrated previously³², causes high matrix aggregation due to its crosslinking effects that strengthen alginate solution bonds. Nevertheless, Skurtys et al.,¹³ and Zhong et al.³¹ have shown that sodium alginate solutions with high viscosities, such as those observed in their study (around 100 mPa*s), may be appropriate for its use in edible coatings, especially if applied by a dipping method; while those with low viscosity can provide processing advantage during spraying methods. Cocoa coating showed lower yield stress and viscosity values than alginate one, this can be attributed to its lipid- based formulation.⁴³ However, according with literature,^{44,28} the yield stress and viscosity values of the used cocoa coating make them suitable for coating purposes, being high enough to prevent gravity effects (sagging and dripping) but sufficiently low to allow capillarity-driven levelling.

Moisture and Water Activity

In Figure 2 moisture changes during the storage of coated fresh-cut orange samples as well as the Co and Co+Al cocoa coatings alone (after removal from fruit pieces) are shown. In both mono and bilayer alginate covered fruits, a constant trend with a slight reduction in moisture content at the end of storage was observed, while in C and Co samples a more pronounced moisture reduction was highlighted during storage. Orange samples Al maintained the highest moisture content during the entire storage period. This behaviour is probably due to the water barrier effect induced by sodium alginate that limited the water migration, keeping the fruit pieces more hydrated than in the other samples.^{4,24} The calcium ascorbate, present in the sodium alginate coating formulations, caused a molecular cross-linking effect, thereby strengthening the chemical bonds among sodium alginate components and further promoting the water migration barrier effect of the coating.⁴⁵ The sodium alginate water barrier effect, which has also been reported in the studies of Meza et al.,²⁸ is underscored by the fact that the Orange Co sample underwent the highest moisture loss during storage, that was parallel to an increase in the moisture content of its cocoa coating (Coating Co).

This behaviour, according with Johanson and Bergensthal,⁴⁶ can be probably attributed to a water exchange between the fruits and the cocoa characterized by different water amount. Furthermore (Figure 2) a similar behaviour was observed in Orange Co+Al, even if with lower intensity, thereby confirming the role of sodium alginate as moisture barrier. The control sample Orange C lost more water compared to samples Al and Co+Al.⁴⁷ but less than sample Orange Co, having only the fruit's natural skin as barrier against dehydration.

In Figure 3 results related to the water activity changes in fresh-cut orange samples and in the different cocoa coatings after their removal at each storage time are reported. Also in this case a reduction in water activity values was observed for all samples during storage. This reduction was parallel to an increase in the respective cocoa coating of samples Al+Co and Co, as previous observed for moisture. This trend may be a further confirmation of water exchange between fruit and coating, as previously seen in moisture results, and also of the barrier effect conferred by sodium alginate coating. Moreover, water activity results, showed how Al and Co+Al samples had the lowest a_w values compared to C and Co orange ones. These low values can be probably attributed to a water binding stronger in Al and Co+Al coatings than Co one, in fact Al and Co+Al coating formulations were rich in sodium alginate that promoted hydrogen bonds.⁴⁸

Textural properties

In the Figures 4 and 5 the firmness and fracturability results of orange samples during storage are shown respectively. Coated Al sample presented the highest firmness values compared to the other ones, showing an increase of this parameter during storage. High firmness values in samples fruit coated with sodium alginate (Orange Al), can be attributed to the alginate network structure.²⁴ Uncoated samples firmness values were intermediate between Al and samples coated with Co (Orange Co+Al and Orange Co), showing a constant trend during all storage times. For what concern Co+Al and Co samples, lower firmness values were observed compared to Al and C ones, this trend

1
2
3 295 can be probably attribute in part to the moisture exchange occurred between cocoa coatings and fruit
4
5 296 and between coating and the surrounding environment as previous stated in the moisture section, that
6
7
8 297 involved a softening effect. Moreover, a further softening effect can be attributed to the presence of
9
10 298 fat in the cocoa coating formulation.

11
12
13 299 For what concern fracturability (Fig. 5), Al sample showed the statistically highest values compared
14
15 300 to other samples at each storage time, while sample Co+Al presented intermediate values between Al
16
17 301 and the other two samples (C and Co), even if not always statistically different from them. These
18
19
20 302 values are a further confirmation of the barrier effect conferred by the sodium alginate coating, that
21
22 303 maintained orange pieces more hydrated and more structured. Moreover, according with literature
23
24 304 (Tapia et al., 2008)¹⁶ the presence of Ca²⁺⁺ improve the fruit resistance to the softening, probably
25
26
27 305 because of the stabilization of membrane systems and the formation of Ca pectates, which increase
28
29 306 rigidity of the middle lamella and cell wall.

30
31
32 307
33
34
35 308 **Microbiological analysis**

36
37
38 309 In Table 3, the cell loads of mesophilic aerobic bacteria, psychrotrophic aerobic bacteria and yeasts
39
40 310 are respectively reported. The growth of mesophilic and psychotrophic aerobic bacteria resulted
41
42 311 affected by the coating types of the samples. Since day 1 of storage, control samples C showed a
43
44
45 312 significant higher cell loads, of both the microbial groups, than the other samples. Both mesophilic
46
47 313 and psychotrophic aerobic bacteria rapidly increased their cell loads after 3 days of storage in controls
48
49 314 and samples covered by cocoa cream (Co) that showed significantly higher cell loads than the other
50
51
52 315 samples. After 6 days of storage also samples coated with alginate alone (Al) significantly increased
53
54 316 the total aerobic loads, while samples coated by both cocoa and alginate showed significant lower
55
56 317 cell loads that the other samples. The total microbial viable count represents an important criterion
57
58
59 318 for the evaluation of food quality.^{49,50} The international criteria of ready to eat fruit report as
60
319 satisfactory levels of aerobic colony count cell loads below 6.0 log cfu/g, acceptable levels when the

cell loads ranged between 6.0-7.0 log cfu/g and unsatisfactory levels when the cell loads are higher than 7.0 log cfu/g.^{51,52} The results obtained showed that control sample overcame the level of 7.0 log cfu/g, both for mesophilic and psychotrophic bacteria, after 6 days of storage. The samples coated with alginate or cocoa alone never exceed the load of 6.0 log cfu/g after 9 days of storage with regard to mesophilic aerobic bacteria while both these samples exceed the acceptable limit of 7.0 log cfu/g for psychotrophic bacteria but only after 9 days of storage. The sample double coated (Co+Al) showed the best quality for the whole period of storage. In fact, the detected cell loads of mesophilic and psychotrophic bacteria after 9 days resulted 4.93 and 6.07 log cfu/g respectively. Yeasts load represents an important quality criterion for ready to eat fruits since they are one of the main spoilage in this food category.⁵³ Also in this case C sample showed a significant higher cell load compared to the other samples for the whole period of storage. Until the third day of storage the Al sample showed the lowest yeasts load. Nevertheless, from the sixth day both the samples Al and Al+Co showed the lowest yeasts loads. However, the international criteria on ready to eat fruit report as unsatisfactory yeast level when the cell load overcome 6 log cfu/g.⁵² In this study, only control samples overcame the reported yeast limit after 9 days of storage. On the contrary, the other samples remained below this limit showing, after 9 days of storage, cell loads of 5.33, 4.77 and 4.70 log cfu/g respectively for the samples Co, Al and Al+Co. Furthermore, microbiological results agree with a_w values since Al and Co+Al samples, that showed lowest a_w values, highlighted the lowest cell load.⁵⁴ Lactic acid bacteria, total coliforms and moulds (data not shown) never exceed 3.5, 2.0 and 1.7 log cfu/g in all samples for the whole period of storage. However, they do not represent the main microbial category of microbial spoilage for this kind of product.⁵³ Overall obtained results are in agreement with literature data that report an antimicrobial effect of alginate coating on different fruit typology such as fresh-cut water melon⁵⁵⁻²³ fresh-cut pineapple¹⁴, pears,¹⁵ apples^{16,17} and blueberries.²⁴ Moreover, these results suggest a synergistic effect of alginate and cocoa coatings when combined, as demonstrated by the lowest growth kinetics of microorganisms in samples subject to this coating.

Sensory analysis

Results of sensory analysis carried out in all samples at 0 and 3 days of storage are reported in Table 4. At 0 day of storage all samples were judged quite similar, obtaining high scores for all evaluated attributes. Orange Al and Co+Al, were more appreciated for texture attribute, while the Orange Co obtained slightly higher scores than Co+Al for smell and flavour attributes; the others were judged similar. After 3 days of storage a reduction in the score of all sensory attributes was registered in all samples, but covered ones maintained scores over the acceptability limit, also after this time. In particular, after 3 days of storage, orange Co was the more appreciated from panellist compared to other samples, except that for the visual appearance and firmness, for which sample Al reached highest scores, followed by Co+Al one. In particular, double coated samples, presented intermediate flavour and overall acceptability values, between Co and Al. Control samples reached the lowest score compared to coated one except that for the visual appearance and firmness, that were judged higher than Co one.

CONCLUSIONS

The present study has demonstrated that a sodium alginate coating can preserve the firmness, moisture content, and product shelf-life of fresh-cut orange. After three days of storage, however, sodium alginate-coated fruits were deemed less appealing with regards to their flavour and smell. On the contrary, samples with cocoa coating maintained superior sensory attributes in terms of flavour, smell and overall acceptability, after three days of storage, but presented lower firmness and higher microbiological load than other coated samples. Control samples manifested the lowest quality of the study group across the main evaluated attributes.

Oranges with the double coating (sodium alginate and cocoa), seems to be the more promising solution in order to obtained fresh cut oranges with the lowest microbial load and at the same time high-quality characteristics. The results of this study suggest that the use of a double sodium alginate

and cocoa coating would lead to both high sensory attributes and extended shelf-life of ready-to-eat, fresh-cut oranges.

ACKNOWLEDGEMENTS

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors. We would like to thank Consortium Agribologna and in particular Dott. Emiliano Cocci for providing raw materials and for technical supports

REFERENCES

- 1 Ranjitha K, Rao DS, Shivashankara KS, Oberoi HS, Roy TK and Bharathamma H, Shelf-life extension and quality retention in fresh-cut carrots coated with pectin. *Innovative Food Sci & Emerging Technol* **42**: 91-100 (2017).
- 2 Lanciotti R, Gianotti A, Patrignani F, Belletti N, Guerzoni ME and Gardini F, Use of natural aroma compounds to improve shelf-life and safety of minimally processed fruits. *Trends in food sci & technol* **15 (3-4)**: 201-208 (2004).
- 3 Marquez GR, Di Pierro P, Mariniello L, Esposito M, Giosafatto CV and Porta R, Fresh-cut fruit and vegetable coatings by transglutaminase-crosslinked whey protein/pectin edible films. *LWT-Food Sci and Technol* **75**: 124-130 (2017).

1
2
3 394
4
5
6 395 4 Nunes CN and Emond JP, Relationship between weight loss and visual quality of fruits and
7
8 396 vegetables. *Proc. Fla. Stat*
9
10
11 397
12
13
14 398 5 Yousuf B, Qadri OS and Srivastava AK, Recent developments in shelf-life extension of fresh-cut
15
16 399 fruits and vegetables by application of different edible coatings: A review. *LWT-Food Sci and*
17
18 400 *Technol* (2018).
19
20
21
22 401
23
24
25 402
26
27
28 403 6 Mastromatteo M, Mastromatteo M, Conte A and Del Nobile MA, Combined effect of active coating
29
30 404 and MAP to prolong the shelf life of minimally processed kiwifruit (*Actinidia deliciosa* cv. Hayward).
31
32 405 *Food Research Int* **44(5)**: 1224-1230 (2011).
33
34
35 406
36
37
38 407 7 Medina MS, Tudela JA, Marín A, Allende A and Gil MI, Short postharvest storage under low
39
40 408 relative humidity improves quality and shelf life of minimally processed baby spinach (*Spinacia*
41
42 409 *oleracea* L.). *Post Biol and Technol* **67**: 1-9 (2012).
43
44
45
46 410
47
48
49 411 8 Manzocco L, Rumignani A and Lagazio C, Emotional response to fruit salads with different visual
50
51 412 quality. *Food Qual and Preference* **28(1)**: 17-22 (2013).
52
53
54 413
55
56
57 414 9 Denoya GI, Vaudagna SR and Polenta G, Effect of high-pressure processing and vacuum packaging
58
59 415 on the preservation of fresh-cut peaches. *LWT-Food Sci and Technol* **62(1)**: 801-806 (2015).
60

- 10 Palekar MP, Taylor TM, Maxim JE and Castillo A, Reduction of Salmonella enterica serotype Poona and background microbiota on fresh-cut cantaloupe by electron beam irradiation. *Int J of Food Microbiol* **202**: 66-72 (2015).
- 11 Mantilla N, Castell-Perez ME, Gomes C and Moreira RG, Multilayered antimicrobial edible coating and its effect on quality and shelf-life of fresh-cut pineapple (*Ananas comosus*). *LWT-Food Sci and Technol* **51(1)**: 37-43 (2013).
- 12 Andrade da Silva D, Krieger Oliveira J, Santos CM, Souza Bery CC, Almeida Castro A and Belarmino Santos JA, The use of sodium alginate-based coating and cellulose acetate in papaya post-harvest preservation. *Acta Scientiarum. Technol* **36(3)** (2014).
- 13 Skurtys O, Acevedo C, Pedreschi F, Enronoe J, Osorio F and Aguilera JM, *Food hydrocolloid edible films and coatings*. Nova Science Publishers, Incorporated (2014).
- 14 Azarakhsh N, Osman A, Ghazali HM, Tan CP and Adzahan NM, Lemongrass essential oil incorporated into alginate-based edible coating for shelf-life extension and quality retention of fresh-cut pineapple. *Post Biol and Technol* **88**: 1-7 (2012).
- 15 Oms-Oliu G, Soliva-Fortuny R and Martín-Belloso O, Edible coatings with antibrowning agents to maintain sensory quality and antioxidant properties of fresh-cut pears. *Post biol and Technol* **50(1)**: 87-94 (2008).

- 1
2
3 439
4
5
6 440 16 Rojas-Graü MA, Tapia MS, Rodríguez FJ, Carmona J and Martin-Belloso O, Alginate and gellan-
7
8 441 based edible coatings as carriers of anti-browning agents applied on fresh-cut Fuji apples. *Food*
9
10 442 *Hydrocolloids* **21(1)**: 118-127 (2007).
11
12
13
14 443
15
16
17 444 17 Chiabrando V and Giacalone G, Effect of essential oils incorporated into an alginate-based edible
18
19 445 coating on fresh-cut apple quality during storage. *Quality Assurance and Safety of Crops and Foods*
20
21 446 **7(3)**: 251-259 (2014).
22
23
24 447
25
26
27 448 18 Kapetanakou AE, Nestora S, Evageliou V and Skandamis PN, *Sodium alginate–cinnamon*
28
29 449 *essential oil coated apples and pears: Variability of Aspergillus carbonarius growth and ochratoxin*
30
31 450 *A production*. Food Research International (2018). Available:
32
33 <https://doi.org/10.1016/j.foodres.2018.10.072>
34 451
35
36
37 452
38
39
40 453 19 Salinas-Roca B, Soliva-Fortuny R, Welti-Chanes J and Martin-Belloso O, Combined effect of
41
42 454 pulsed light, edible coating and malic acid dipping to improve fresh-cut mango safety and quality.
43
44 455 *Food Control* **66**: 190-197 (2016).
45
46
47
48 456
49
50
51 457 20 Tapia MS, Rojas-Graü MA, Carmona A, Rodríguez FJ, Soliva-Fortuny R and Martin-Belloso O,
52
53 458 Use of alginate-and gellan-based coatings for improving barrier, texture and nutritional properties of
54
55 459 fresh-cut papaya. *Food Hydrocolloids* **22(8)**: 1493-1503 (2008).
56
57
58 460
59
60

- 21 Zapata PJ, Guillén F, Martínez-Romero D, Castillo S, Valero D and Serrano M, Use of alginate or zein as edible coatings to delay postharvest ripening process and to maintain tomato (*Solanum lycopersicon* Mill) quality. *J of the Sci of Food and Agricul* **88(7)**: 1287-1293 (2008).
- 22 Raybaudi-Massilia RM, Mosqueda-Melgar J and Martín-Belloso O, Edible alginate-based coating as carrier of antimicrobials to improve shelf-life and safety of fresh-cut melon. *Intl J of Food Microbiol* **121(3)**: 313-327 (2008).
- 23 Poverenov E, Danino S, Horev B, Granit R, Vinokur Y and Rodov V, Layer by-Layer electrostatic deposition of edible coating on fresh cut melon model: Anticipated and unexpected effects of alginate–chitosan combination. *Food Bioprocess Technol* **7**: 1424–1432 (2014).
- 24 Mannozi C, Cecchini JP, Tylewicz U, Siroli L, Patrignani F, Lanciotti R, ... and Romani S, Study on the efficacy of edible coatings on quality of blueberry fruits during shelf-life. *LWT-Food Sci and Technol* **85**: 440-444 (2017).
- 25 Ma L, Zhang M, Bhandari B and Gao Z, Recent developments in novel shelf life extension technologies of fresh-cut fruits and vegetables. *Trends in Food Sci and Technol* **64**: 23-38 (2017).
- 26 Biquet B and Labuza TP, Evaluation of the moisture permeability characteristics of chocolate films as an edible moisture barrier. *J of Food Sci* **53(4)**: 989-998 (1988).

- 1
2
3 483 27 Khan MKI, Maan AA, Schutyser M, Schroën K and Boom R, Electrospraying of water in oil
4
5 484 emulsions for thin film coating. *J of Food Engineering* **119**: 776–780 (2013).
6
7
8 485
9
10
11 486 28 Meza BE, Carboni AD and Peralta JM, Water adsorption and rheological properties of full-fat and
12
13 487 low-fat cocoa-based confectionery coatings. *Food and Bioproducts Processing* **110**: 16-25 (2018).
14
15
16 488
17
18
19 489 29 Gounga ME, Xu S and Wang Z, Nutritional and microbiological evaluations of chocolate-coated
20
21 Chinese chestnut (*Castanea mollissima*) fruit for commercial use. *J Zhejiang University of Sci B*. **9**
22 490
23
24 491 **(9)**: 675-683 (2008).
25
26
27 492
28
29
30 493 30 Glicerina V, Tylewicz U, Canali G, Siroli L, Dalla Rosa M, Lanciotti R and Romani S, Influence
31
32 494 of two different cocoa-based coatings on quality characteristics of fresh-cut fruits during storage.
33
34 *LWT-Food Sci and Technol*, **101**: 152-160 (2019).
35 495
36
37 496
38
39
40 497 31 Zhong Y, Cavender G and Zhao Y, Investigation of different coating application methods on the
41
42 performance of edible coatings on Mozzarella cheese. *LWT-Food Sci and Technol* **56(1)**: 1-8 (2014).
43 498
44
45
46 499
47
48
49 500
50
51
52 501 32 Fu S, Thacker A, Sperger DM, Boni RL, Buckner IS, Velankar S and Block LH, Relevance of
53
54 502 rheological properties of sodium alginate in solution to calcium alginate gel properties. *Aaps*
55
56 503 *Pharmscitech* **12(2)**: 453-460 (2011).
57
58
59 504
60

- 33 Stortz TA and Marangoni AG, Ethylcellulose solvent substitution method of preparing heat resistant chocolate. *Food research int* **51(2)**: 797-803 (2013).
- 34 Glicerina V, Balestra F, Dalla Rosa M and Romani S, Microstructural and rheological characteristics of dark, milk and white chocolate: A comparative study. *J of Food Engineering* **169**: 165-171 (2016).
- 35 International Confectionery Association (ICA), 2000. Viscosity of Cocoa and Chocolate Products. Analytical Method 46. Available from: CAOBISCO, rueDefacqz 1, B-1000 Bruxelles, Belgium.
- 36 Rao A (ed). *Rheology of Fluid, Semisolid, and Solid Foods*, Springer, New York (2014).
- 37 Glicerina V and Romani S, Advances in Yield Stress Measurements for Chocolate, in *Advances in Food Rheology*, ed. by J. Amhed, Elsevier, UK, pp.459-481 (2017).
- 38 Beirão-da-Costa S, Steiner A, Correia L, Empis J and Moldão-Martins M, Effects of maturity stage and mild heat treatments on quality of minimally processed kiwifruit. *J of Food Engineering*, **76(4)**: 616-625 (2006).
- 39 Stone H, Bleibaum R and Thomas HA, Test strategy and design of experiments. *Sensory evaluation practices* 117-157 (2012).

- 1
2
3 527
4
5
6 528 40 ISO, U. 8589. *Analisi sensoriale “Criteri generali per la progettazione di locali destinati*
7
8 529 *all’analisi” Ente Nazionale Italiano di Unificazione. Milano, Italia (2007).*
9
10
11 530
12
13
14 531 41 Izidoro DR, Scheer AP, Sierakowski MR, Haminiuk CWI, Influence of green banana pulp on the
15
16 532 rheological behaviour and chemical characteristics of emulsion (mayonnaises). *LWT- Food Sci and*
17
18 *Technol* **41**: 1018–1028 (2008).
19 533
20
21
22 534
23
24
25 535 42 Davidovich-Pinhas M and Bianco-Peled H, A quantitative analysis of alginate swelling.
26
27 536 *Carbohydrate Polymers* **79(4)**: 1020-1027 (2010).
28
29
30 537
31
32
33 538 43 Glicerina V, Balestra F, Pinnavaia GG, Dalla Rosa M and Romani S, Rheological characteristics
34
35 539 of nut creams realized with different types and amounts of fats. *J of Food Quality* **36(5)**: 342-350
36
37 (2013).
38 540
39
40
41 541
42
43
44 542 44 Peressini D, Bravin B, Lapasin R, Rizzotti C and Sensidoni A, Starch–methylcellulose based
45
46 543 edible films: rheological properties of film-forming dispersions. *J of Food Engineering* **59(1)**: 25-32
47
48 544 (2003).
49
50
51 545
52
53
54 546 45 Embuscado ME and Huber KC (eds). *Edible films and coatings for food applications*. Springer,
55
56 547 New York (2009)
57
58
59 548
60

- 46 Johansson D and Bergenståhl B, The influence of food emulsifiers on fat and sugar dispersions in oils. III. Water content, purity of oils. *J of the American Oil Chemists' Society* **69(8)**: 728-733 (1992).
- 47 Yaman Ö and Bayındırlı L, Effects of an edible coating and cold storage on shelf-life and quality of cherries. *LWT-Food Sci and Technol* **35(2)**: 146-150 (2002).
- 48 Hou L and Wu P, Exploring the hydrogen-bond structures in sodium alginate through two-dimensional correlation infrared spectroscopy. *Carbohydrate polymers* **205**: 420-426 (2019).
- 49 Jeddi MZ, Yunesian M, Gorji MEH, Noori N, Pourmand MR and Khaniki GRJ, Microbial evaluation of fresh, minimally-processed vegetables and bagged sprouts from chain supermarkets. *J of health, population, and nutrition* **32(3)**: 391 (2014).
- 50 Cardamone C, Aleo A, Mammina C, Oliveri G and Di Noto AM, Assessment of the microbiological quality of fresh produce on sale in Sicily, Italy: preliminary results. *J of Biological Research-Thessaloniki* **22(1)**: 3 (2015).
- 51 Health Protection Agency. Guidelines for assessing the microbiological safety of ready-to-eat foods placed on the market (2009). Available: http://www.hpa.org.uk/web/HPAwebFile/HPAweb_C/1259151921557

1
2
3 571 [52 FSAI, Guideline Microbiological Criteria \(2016\). Available:](#)
4
5 572 https://www.fsai.ie/food_businesses/micro_criteria/guideline_micro_criteria.html
6
7
8 573
9
10
11 574 53 Siroli L, Patrignani F, Serrazanetti DI, Tabanelli G, Montanari C, Tappi S, Rocculi P, Gardini F
12
13 and Lanciotti R, Efficacy of natural antimicrobials to prolong the shelf-life of minimally processed
14 575 apples packaged in modify atmosphere. *Food Control* **46**: 1-9 (2014).
15
16 576
17
18
19 577
20
21
22 578 54 Nyhan L, Begley M, Mutel A, Qu Y, Johnson N and Callanan M, Predicting the combinatorial
23
24 579 effects of water activity, pH and organic acids on *Listeria* growth in media and complex food matrices.
25
26 580 *Food microbiol* **74**: 75-85 (2018).
27
28
29 581
30
31
32 582 55 Sipahi RE, Castell-Perez ME, Moreira RG, Gomes C and Castillo A, Improved multilayered
33
34 antimicrobial alginate-based edible coating extends the shelf life of fresh-cut watermelon (*Citrullus*
35 583 *lanatus*). *LWT-Food Sci and Technol* **51**: 9–15 (2013).
36
37 584
38
39
40 585
41
42
43 586
44
45
46 587
47
48
49 588
50
51
52 589
53
54
55 590
56
57
58 591
59
60 592

Table 1. Alginate and Cocoa based coating formulations.

Ingredients (g/100 g)	Alginate Coating	Cocoa Coating
Non -hydrogenated fats	-	45.0 g
Sugars	-	41.0 g
Cocoa powder	-	7.0 g
Skimmed milk powder	-	6.0 g
Soy lecithin	-	0.4g
Stabilizer	-	0.4g
Vanille flavour	-	0.2g
Distilled water	80.0 g	-
Calcium ascorbate	10.0 g	-
Sodium alginate powder	10.0 g	-

1
2
3 605
4
5
6 606
7
8 607
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28 608
29
30
31 609
32
33
34 610
35
36
37 611
38
39
40 612
41
42
43 613
44
45
46 614
47
48
49 615
50
51
52 616
53
54
55 617
56
57
58 618
59
60
619

Table 2. Yield stress and plastic viscosity values of alginate and cocoa based coating obtained by applying the Casson model.

Samples	Yield Stress (mPa)	Plastic Viscosity (mPa)
Alginate Coating	98660.5±1817.9 ^a	951.2 ±4.90 ^a
Cocoa Coating	3344.5±209.5 ^b	519.5±13.8 ^b

^{a-b}Values followed by different letters differ significantly at P<0.05 level.

Table 3. Cell loads expressed as log CFU/g of mesophilic and psychrotrophic aerobic bacteria and yeasts of non-coated sample (C), sample coated by sodium alginate (Al), by cocoa cream (Co) and covered by both coatings (Co+Al) during 9 days of refrigerated storage.

Samples	Mesophilic aerobic bacteria (log CFU/g)			
	day 1	day 3	day 6	day 9
C	4.82±0.14 ^a	5.93±0.11 ^a	7.14±0.09 ^a	7.39±0.04 ^a
Al	3.05±0.45 ^{bc}	3.93±0.41 ^c	5.14±0.05 ^b	5.83±0.11 ^b
Co	3.24±0.13 ^c	4.61±0.14 ^b	4.83±0.08 ^c	5.51±0.20 ^b
Co+Al	3.66±0.18 ^b	3.86±0.16 ^c	4.22±0.25 ^d	4.93±0.13 ^c
	Psychrotrophic aerobic bacteria (log CFU/g)			
	day 1	day 3	day 6	day 9
C	5.15±0.09 ^a	6.85±0.10 ^a	8.06±0.17 ^a	8.66±0.12 ^a
Al	3.49±0.35 ^c	5.16±0.39 ^c	6.22±0.15 ^c	7.02±0.08 ^b
Co	4.65±0.12 ^b	5.91±0.16 ^b	6.76±0.22 ^b	7.05±0.17 ^b
Co+Al	4.71±0.19 ^b	4.95±0.60 ^c	5.20±0.26 ^d	6.07±0.18 ^c
	Yeasts (log CFU/g)			
	day 1	day 3	day 6	day 9
C	3.49±0.12 ^a	4.83±0.83 ^a	5.51±0.14 ^a	6.13±0.12 ^a
Al	2.36±0.13 ^c	2.61±0.08 ^c	3.71±0.13 ^c	4.77±0.29 ^c
Co	3.05±0.11 ^b	3.68±0.31 ^{ab}	4.82±0.14 ^b	5.33±0.12 ^b
Co+Al	3.02±0.06 ^b	3.15±0.53 ^b	3.27±0.27 ^c	4.70±0.14 ^c

^{a-d}Values followed by different letters differ significantly at P<0.05 level.

Table 4. Sensory attributes of non-coated sample (C), sample coated by sodium alginate (Al), by cocoa cream (Co) and covered by both coatings (Co+Al) at 0 and 3 days of storage.

Time (days)	Sample	External visual appearance	Inner visual appearance	Smell	Flavour	Firmness	Overall Acceptability
0	C	8.11±0.29 ^a	8.46±0.35 ^a	8.23±0.22 ^c	8.25±0.06 ^c	8.21±0.26 ^b	8.19±0.31 ^b
	Al	8.43±0.32 ^a	8.64±0.23 ^a	8.00±0.14 ^c	8.15±0.09 ^c	8.83±0.18 ^a	8.13±0.15 ^b
	Co	8.50±0.23 ^a	8.80±0.29 ^a	9.00±0.16 ^a	8.70±0.13 ^a	7.82±0.31 ^c	8.95±0.13 ^a
	Co+Al	8.35±0.38 ^a	8.70±0.24 ^a	8.66±0.11 ^b	8.48±0.09 ^b	9.00±0.36 ^a	8.73±0.17 ^a
3	C	6.02±0.10 ^b	6.04±0.07 ^b	4.90±0.09 ^c	4.94±0.21 ^d	6.00±0.06 ^c	5.41±0.31 ^d
	Al	6.42±0.20 ^a	6.47±0.15 ^a	6.46±0.17 ^b	5.70±0.10 ^c	6.56±0.17 ^a	6.23±0.07 ^c
	Co	5.83±0.16 ^c	5.66±0.19 ^c	6.85±0.15 ^a	6.80±0.19 ^a	5.65±0.11 ^d	6.65±0.16 ^a
	Co+Al	6.13±0.18 ^b	6.33±0.17 ^a	6.57±0.13 ^b	6.58±0.11 ^b	6.35±0.16 ^b	6.44±0.12 ^b

^{a-d} Values followed by different letters differ significantly at P<0.05 level.

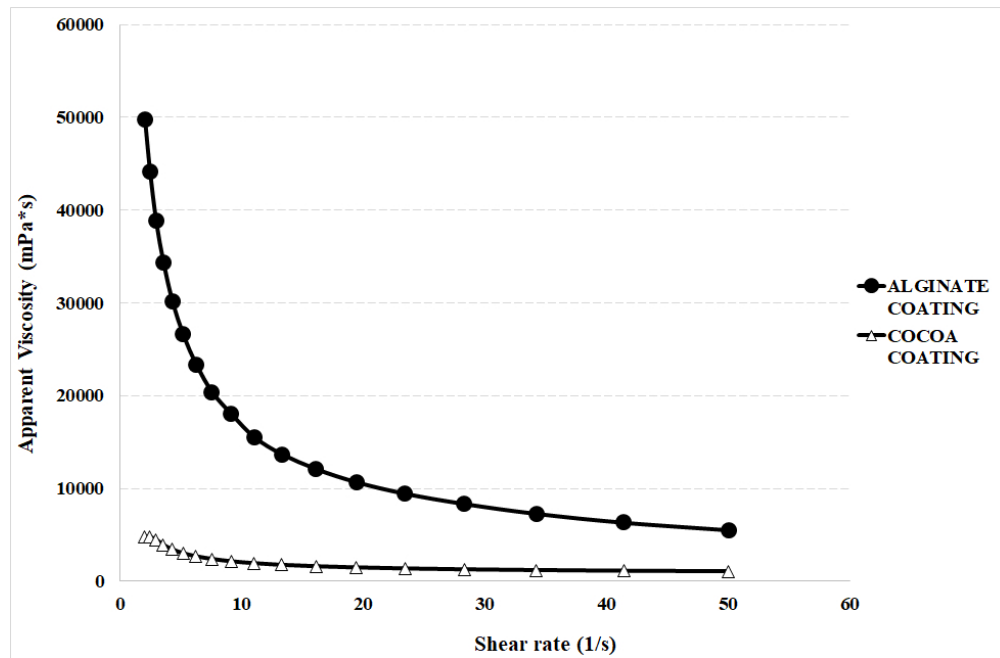


Figure 1. Flow curves of alginate and cocoa based coating evaluated by increasing the shear rate from 2 to 50 s⁻¹.

258x169mm (96 x 96 DPI)


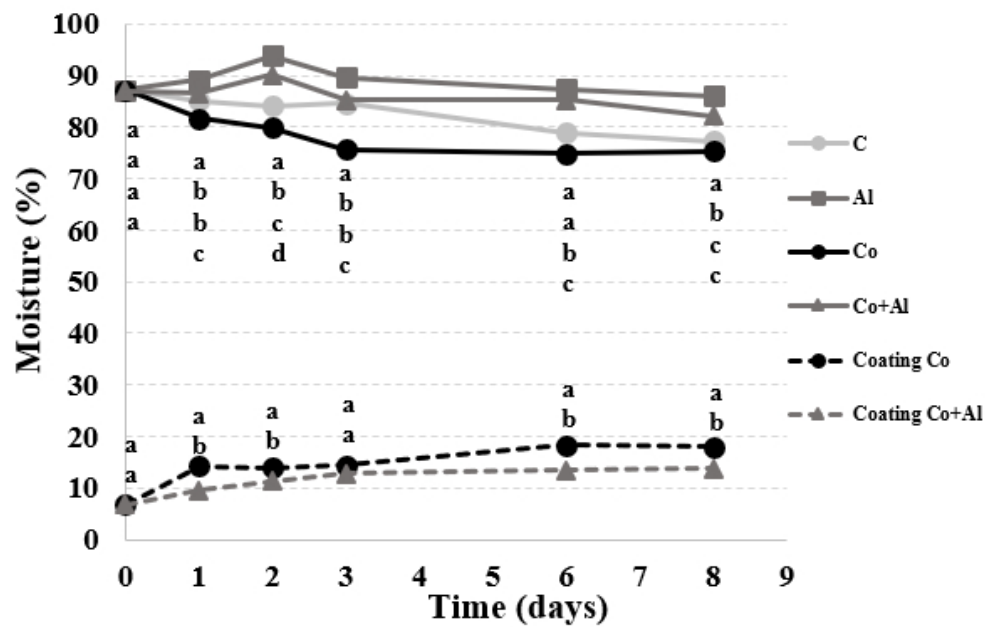



Figure 2. Moisture of orange samples evaluated during storage.
a-d Values followed by different letters differ significantly at P<0.05 level

157x101mm (96 x 96 DPI)

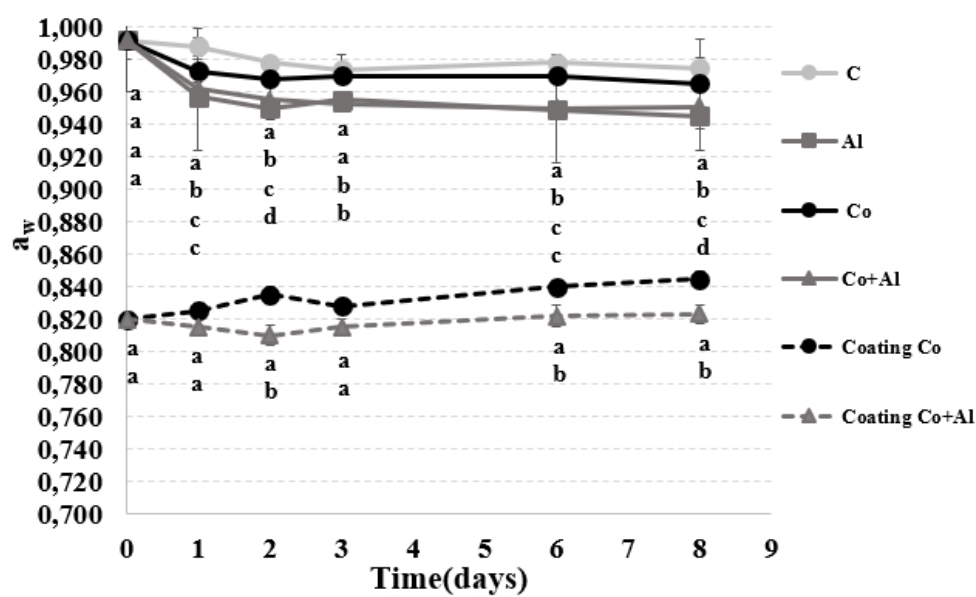


Water activity (a_w) of orange samples evaluated during storage.
 a-d Values followed by different letters differ significantly at $P < 0.05$ level

171x106mm (96 x 96 DPI)

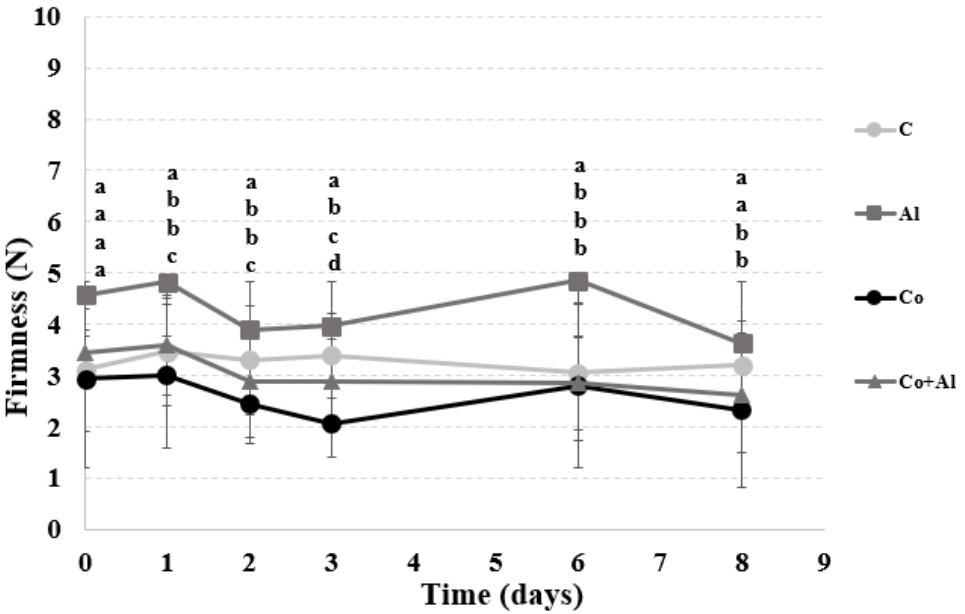

Firmness of orange samples evaluated during storage.
a–d Values followed by different letters differ significantly at P<0.05 level

174x114mm (96 x 96 DPI)

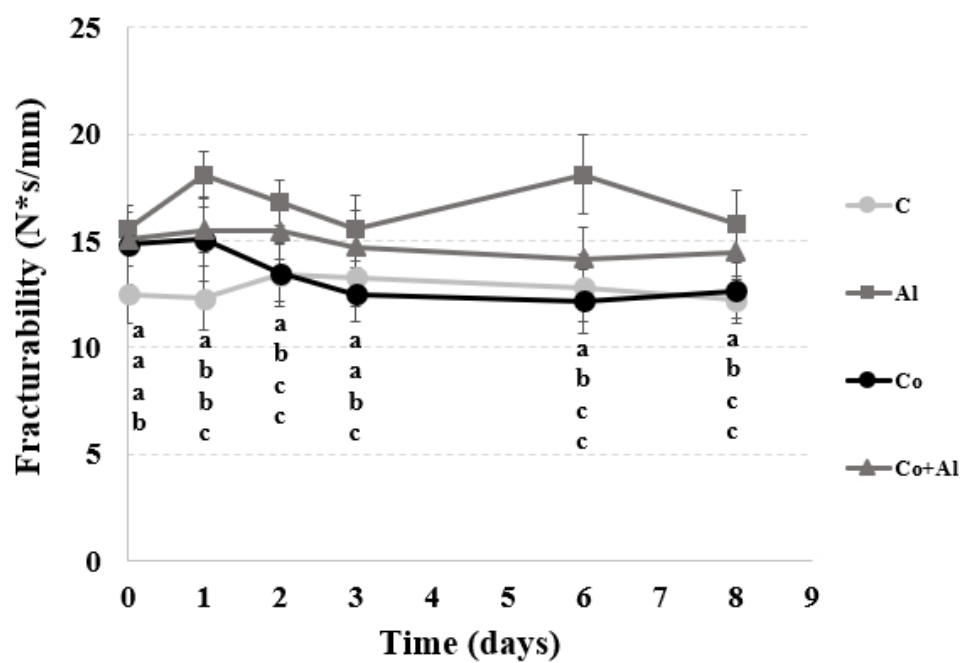

Fracturability values of orange samples during storage
a-c Values followed by different letters differ significantly at $P < 0.05$ level

156x111mm (96 x 96 DPI)