

Alma Mater Studiorum Università di Bologna
Archivio istituzionale della ricerca

Evaluation of drying of edible coating on bread using NIR spectroscopy

This is the final peer-reviewed author's accepted manuscript (postprint) of the following publication:

Published Version:

Nallan Chakravartula, S.S., Cevoli, C., Balestra, F., Fabbri, A., Dalla Rosa, M. (2019). Evaluation of drying of edible coating on bread using NIR spectroscopy. JOURNAL OF FOOD ENGINEERING, 240(January 2019), 29-37 [10.1016/j.jfoodeng.2018.07.009].

Availability:

This version is available at: <https://hdl.handle.net/11585/666048> since: 2021-09-09

Published:

DOI: <http://doi.org/10.1016/j.jfoodeng.2018.07.009>

Terms of use:

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).
When citing, please refer to the published version.

(Article begins on next page)

Accepted Manuscript

Evaluation of drying of edible coating on bread using NIR spectroscopy

Swathi Sirisha Nallan Chakravartula, Federica Balestra, Chiara Cevoli, Angelo Fabbri,
Marco Dalla Rosa

PII: S0260-8774(18)30298-X

DOI: [10.1016/j.jfoodeng.2018.07.009](https://doi.org/10.1016/j.jfoodeng.2018.07.009)

Reference: JFOE 9323

To appear in: *Journal of Food Engineering*

Received Date: 11 May 2018

Revised Date: 5 July 2018

Accepted Date: 6 July 2018

Please cite this article as: Nallan Chakravartula, S.S., Balestra, F., Cevoli, C., Fabbri, A., Rosa, M.D., Evaluation of drying of edible coating on bread using NIR spectroscopy, *Journal of Food Engineering* (2018), doi: 10.1016/j.jfoodeng.2018.07.009.

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting proof before it is published in its final form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

Evaluation of drying of edible coating on bread using NIR spectroscopy

Swathi Sirisha Nallan Chakravartula^{a, b*}, Federica Balestra^b, Chiara Cevoli^b, Angelo Fabbri^{a, b},
Marco Dalla Rosa^{a, b}

^a *Department of Agricultural and Food Sciences, Alma Mater Studiorum, University of Bologna, Campus of Food Science, Cesena, Italy.*

^b *Interdepartmental Centre for Agri-Food Industrial Research, Alma Mater Studiorum, University of Bologna, Campus of Food Science, Cesena, Italy*

*Corresponding author: swathisirisha.nalla2@unibo.it

Tel. No. +39 327 859 0255

Department of Agricultural and Food Sciences,

Alma Mater Studiorum, University of Bologna,

Campus of Food Science,

Piazza Goidanich-60, Cesena – 47521,

Italy.

Keywords:

NIR, drying behaviour, PLS regression, Process monitoring

28 **Abbreviations**

29

30 1L Single layer of coating

31 2L Two layers of coating

32 a_w Water activity

33 B Bottom crust of the bread

34 T Top crust of the bread

35 EC Edible Coatings

36 EF Edible Films

37 LV Latent variable

38 MC Moisture Content

39 PC Principal Components

40 RH Relative Humidity

41 HSI Hyper-spectral Imaging

42 MSC Multiplicative Scatter Correction

43 NIR Near Infrared

44 PCA Principal Component Analysis

45 PLS Partial Least Square

46 SVN Standard Normal Variate

47 TSS Total Soluble Solids

48 RMSE Root Mean Square Error

49 RMSEC Root Mean Square Error Calibration set

50 RMSECV Root Mean Square Error Cross Validation set

51 RMSET Root Mean Square Error Test set

52 SAVGOL Savitzky–Golay derivate

53

54

55

56

Abstract

Edible coatings are recently gaining attention for potential applications in bakery products to extend the shelf-life and incorporate functional characteristics, like probiotics, antimicrobial or an antioxidant compound, for which drying of the coating is an essential step. The aim of this work was to utilize near infrared (NIR) spectroscopy as a tool to rapidly monitor and develop predictive model for the drying of edible coating on bread (mini-burger buns) surfaces. The buns coated with edible coating were dried at two different temperature regimes, at 25 °C and 60 °C for one layer of coating and one temperature regime at 60 °C for two layers of coating. NIR spectra were collected and moisture content was determined at different drying times. The spectral data were pre-treated and subjected to Principal component analysis (PCA) for discrimination of drying times and subsequently to Partial least squares (PLS) regression for moisture prediction for given temperature, time and surface. Results show that NIR spectroscopy was able to reflect the drying process and discriminate between the various surfaces of bread and times of drying, primarily by the differences in water and protein absorption bands (1940nm, 1500nm, 2050nm). Also, the subsequent PLS regression of the spectral data was found to describe satisfactorily the drying behaviour and the optimal drying moment with RMSE values $\leq 3\%$ for the calibration and cross validation data sets. The procedure proposed could be used for faster quantification of moisture during drying process.

1. Introduction

Bread is a staple food and an important commodity in daily nutrition of many cultures, generally viewed as a perishable product with limited shelf-life that is affected by staling and mould spoilage (Amigo et al., 2016; Licciardello et al., 2017). Staling is a complex phenomenon influencing the textural quality and consumer acceptance of bread contributing to economic losses besides mould growth (Besbes et al., 2014; Chin et al., 2011; Licciardello et al., 2014). Staling of bread is linked strongly to the retrogradation of starch, moisture loss and redistribution resulting in decreased softness, cohesiveness and loss of fresh flavour (Gray and Bemiller, 2003; He and Hoseney, 1990). The objective of bread packaging is to prevent rapid loss of moisture and ensure longer shelf- life. An efficient packaging system not only effectively maintains quality characteristics, but also has lower environmental and cost impacts (Licciardello et al., 2017).

Edible films (EF) and edible coatings (EC) have garnered increasing attention in the past decade as a novel alternative to lower synthetic packaging and improve biodegradability. They can be described as thin layers or films of material formed on the surface of the food or used as stand-alone films that provide protection to food products by acting as moisture, gas and aroma barriers as well as provide secondary functions like anti-oxidant or antimicrobial activity (Falguera et al., 2011; Galus and Kadzińska, 2015). Edible coatings can constitute one or more proteins, polysaccharides and lipids or a combination thereof resulting in composite coatings applied as bi-layer systems or emulsions (Debeaufort et al., 1998; Kester and Fennema, 1986). Edible films and coatings have been proven to improve the quality and shelf-life of foods as shown in various studies and mentioned extensively in reviews (Baeva and Panchev, 2005; Bartolozzo et al., 2016; Campos et al., 2011; Costa et al., 2018; Debeaufort et al., 1998; Dehghani et al., 2018; Ferreira Saraiva et al., 2016; Guldás et al., 2010; Ncama et al., 2018; Otoni et al., 2017; Tongnuanchan and Benjakul, 2014; Yousuf et al., 2018).

104 In recent studies, application of active films directly onto sliced bread and use of edible
105 coated films for packaging of sliced bread were found to be effective in reducing the mould
106 growth and preserving freshness of bread (Balaguer et al., 2013; Otoni et al., 2014). In few
107 studies related to crumb firming kinetics of cake and cake type products it was observed that
108 the textural changes related to staling were delayed by the use of edible coatings (Baeva and
109 Panchev, 2005; Bartolozzo et al., 2016; Ferreira Saraiva et al., 2016).

110 These edible coatings are singular or composite materials, generally in their liquid form that
111 are spread or sprayed and dried to render an individual layer on the product surfaces. Hence,
112 drying is considered an important step in the formation of edible coating that influences the
113 water activity of the food. In a study on probiotic breads by Soukoulis et al., (2014) two
114 different temperature and time regimes, a low temperature drying at 60°C for 10 min and high
115 temperature drying at 180°C for 2 min, were utilized to dry coating. Ferreira Saraiva et al.,
116 (2016) in their study on efficacy of active coatings dried the coating on *mini-panettone* at
117 180°C for 5 min. In another study on effect of coating on muffin quality a temperature of
118 40°C was utilized (Bartolozzo et al., 2016). A significant effect of drying temperatures was
119 found on the crust and crumb moisture contents, which decreased by drying at higher
120 temperatures. However, in our knowledge, no available study relates to the monitoring of
121 drying process and kinetics of edible coat drying when applied onto bread. Thus, it is of
122 importance to understand the drying process in order to dry the coating applied on surface but
123 not of the internal product.

124 In general, the drying kinetics of foods are evaluated by weight loss and moisture loss during
125 drying for a given temperature and humidity (Di Scala & Crapiste, 2008; Lahsasni, Kouhila,
126 Mahrouz, & Jaouhari, 2004; Planinić, Velić, Tomas, Bilić, & Bucić, 2005). However,
127 analyzing moisture content by oven-drying or vacuum-drying is destructive and time
128 consuming requiring extensive sample preparation, unsuitable for large number of samples
129 and also contributes to product wastage. Different non-destructive techniques based on the

130 electrical, magnetic properties; spectral-scattering and imaging have been developed in the
131 past few years as tools for measuring moisture content and recently for online quality
132 monitoring (Büning-Pfaue, 2003; Chen et al., 2013; He et al., 2014; Mohammadi-
133 Moghaddam et al., 2018; Özdemir et al., 2018; Todt et al., 2006; Wu et al., 2013). Near
134 Infrared (NIR) spectroscopy is one such tool widely applied, with increasing interest in recent
135 times, for online quality monitoring of various food products, particularly cereal and cereal
136 products (Cevoli et al., 2015; Czaja et al., 2018; Foca et al., 2011; Huang et al., 2008; Jirsa et
137 al., 2007; Osborne, 1996; Sørensen, 2009). It is a physical, non destructive method for
138 measuring the physico-chemical properties of foods with high precision and minimal sample
139 preparation.

140 Several studies utilized NIR spectroscopy in the determination of moisture, protein and other
141 constituents in cereal grains and their products as stated; in which the weak absorption of
142 water molecules facilitates also for the analysis of high moisture foods (Osborne et al., 1984).
143 Suzuki, McDonald, & D'Appolonia (1986) applied NIR to evaluate the moisture, protein and
144 lipid fractions of both dried and fresh bread and found that sample preparation does not
145 increase the accuracy of readings. Sørensen, (2009) in his extensive study described the
146 feasible use of NIR spectroscopy to analyze the composition of wheat and rye breads and
147 found values comparable to that of chemical analyses. Several studies show successful
148 application of NIR for moisture analysis of intact products as well as their evolution during
149 storage, particularly, for factors related to staling in products like cereals, bread, flat breads,
150 biscuits and cakes (Cevoli et al., 2015; Osborne, 1996; Osborne et al., 1984; Wilson et al.,
151 1991; Xie et al., 2003). Other studies related to osmo-air dehydration of blueberries,
152 sulphured drying of Apricots used NIR spectroscopy as a tool to evaluate the drying process
153 and differentiate the pre-treatments (Özdemir et al., 2018; Sinelli et al., 2011). Moreover, the
154 perceived advantages of this method like minimal sample preparation, rapid assessment and
155 scope for assembly in production line make it a suitable choice to provide continuous
156 monitoring of the conditions and detect changes in the product characteristics in a production

line. These attributes of NIR spectroscopy can also be extended for evaluating the surface moisture of coated breads during drying.

In this context, the objective of the present study is to use NIR spectroscopy as a tool to evaluate the drying time of coating on the selected bakery product (mini-burger buns) and develop a predictive model for the drying of the utilized edible coating on bread surface.

2. Materials and methods

2.1 Materials

Sodium alginate (Sigma-Aldrich, St. Louis Missouri USA); pectin (derived from Citrus peel, Sigma-Aldrich, St. Louis Missouri USA); whey protein concentrate (80% protein, Products-Gianni SRL, Milan Italy) were used to prepare edible coating solution. Glycerol ($\geq 99.5\%$) (Sigma-Aldrich, St. Louis Missouri USA) and Tween[®] 20 (Sigma-Aldrich, St. Louis Missouri USA) were used as plasticizer and surfactant respectively. Industrially manufactured “mini-burger buns” were procured from the local market (Ipercoop, Cesena, IT). The ingredients of the mini-burger buns as per the packaging were wheat flour, water, rapeseed oil, yeast, Glucose-Fructose syrup, sugar, salt and emulsifiers.

2.2 Preparation of coated bread

The film forming solution was prepared by dispersing 1.5% w/w each of pectin, alginate and whey protein concentrate with addition of 33% of glycerol and 3.5% Tween[®] 20 for 100g biopolymer. The dispersion was heated up to a temperature of 75°C for 45 minutes while being continually stirred on a hot plate with magnetic stirrer (ARE Heating Magnetic stirrer, Velp Scientific USA). The solution was subsequently cooled to room temperature and homogenized at 6000 rpm for 1 minute with a homogenizer (Model Ultra-Turrax T-25 digital, IKA). Further, the solution was placed under vacuum (100mb, 10 minutes) using a pump (SC 920, KNF ITALY, Milan) in order to degas the solution (Javanmard and Golestan, 2008). The

coating solution (pH - 4.7 ± 0.01 , TSS - 5.4 ± 0.06 , a_w - 0.97 ± 0.001) was then spread onto the surface of mini-burger buns (Height- 30 mm, Diameter - 70 mm, Weight - 25.65 ± 0.7 g) with the aid of a clean confectionery brush as a single layer (1L) or two layers (2L) with a 3-minute interval between applications. The average weight of the coating before drying was 2.4 (± 0.2) g for 1L and 3.6 (± 0.2) g for 2L of coating.

2.3 Drying Time Evaluation

The coated bread samples were dried by use of drying equipment (CLW 400 TOP+, POL-EKO Apparatus SP. J) and the moisture content of the Top (T) and bottom (B) surfaces of the breads were evaluated separately. In order to identify the optimal drying time, two temperature regimes were examined, 25°C (50% RH) and 60°C (10% RH) to dry the coating. The samples with single layer of coating (1L) were dried at 25°C and 60°C, while those coated with two layers (2L) only at 60°C (10% RH). The samples were subjected to NIR spectroscopy and moisture content was monitored subsequently at predetermined time intervals, in particular 1L at 25°C every 30 min; 1L at 60°C every 5 min and 2L at 60°C every 10 min.

The moisture content of at least five breads in batches was calculated by carefully separating approximately 1g of bread crust from both top and bottom surfaces, individually onto the aluminium pans of Thermo balance (i-Thermo 163M, Exacta-Optech, Italy). The samples were dried at 130°C until constant weight was achieved. A set of bread samples without coating (Control) at time zero were analyzed in order to identify the initial moisture content of the bread surfaces (T, B) which were considered as the moisture contents to be reached approximately at the optimum drying time of the coated samples.

2.4 NIR spectroscopy

The control and coated samples were submitted to near-infrared spectroscopy (NIR) for acquisition of the spectra using a FT-NIR spectrophotometer (MATRIX™ -F, Bruker Optics)

in diffuse reflectance in the range of 12,000 and 4,000 cm^{-1} (8 cm^{-1} resolution). A schematic representation of the measurement with NIR probe is shown in figure 1. An average of 32 scans were obtained for each sample and for each drying time by placing the optical fiber probe (IN 261, Bruker Optics, Mass., USA) in direct contact with the coated bread surface. The probe is characterized by a diameter of 10 mm and uses a bifurcated fiber bundle to illuminate the sample and collect the refracted light. For each spectrum acquired, the background was acquired by placing the probe in the specific support covered with quartz under the same environmental conditions as the sample (25°C) which was subtracted. The bread was scanned at 3 central points of the top and bottom crust; and subsequently for each surface, the average spectrum of the three acquisitions was calculated.

2.5 Data analysis

Significant differences (at p-level <0.05) between means of the moisture content at different drying times were explored by means of the analysis of variance (ANOVA with post-hoc Tukey HSD); and Kruskal-Wallis test was used if significant differences emerged between variance of means of the Levene test (Statistica-StatSoft, version 7). The NIR spectra acquired on the different bread samples were analyzed by multivariate analyses (The Unscrambler ver. 9.7, CAMO, Oslo, Norway). The first part of the spectra until 1,100 nm was deleted before processing because it contains no useful chemical information, but only instrumental noise. To remove the scatter effects from spectra, the data were normalized by Standard Normal Variate (SNV) or Multiplicative Scatter Correction (MSC); following this the spectra were pre-treated by the Savitzky–Golay derivative, (SAVGOL) to enhance resolution. Spectral data were subjected to Principal Component Analysis (PCA) and Partial Least Square (PLS) regression.

PCA was applied as an exploratory analysis in order to define a possible discrimination among samples dried for different times. PLS, predictive analysis of the water content (dependent variable) was then carried out for both drying temperature and bread surfaces (top

and bottom). The predictive power of the obtained models were tested by analyzing the calibration results and by performing the full cross and test set validation. For the test set validation, the dataset was randomly divided into two sub-sets, one to calibrate the system (70% of the entire dataset) and the other (30%) to validate it. To avoid the model over-fitting, the optimal number of latent variables (LV) was chosen by plotting the root mean square error (RMSE) as a function of the number of components and by identifying where the curve reaches a minimum.

3. Results & Discussions

Concerning the drying at 25 °C, the mean moisture content values (%) over the drying time are reported in figure 2, for the top (grey diamond) and bottom (black triangle) surfaces, respectively. The dotted lines identify the moisture content of the control samples at time zero without coating for the top (grey) and for the bottom (black). It can be seen that the moisture content decreased rapidly for about 90-120 minutes and after that tended to reach an equilibrium state. This value was however observed to be influenced by the relative humidity of the drying cabinet (RH=50%). This is because of the proportionality between the humidity ratio at the product surface and the rate of moisture evaporation (Kozempel et al., 2003).

The dispersion around the mean value, especially for the partially dried samples, is probably due to the sample preparation and the non-uniform evaporation of the water from the surface. The crust and crumb separation from the whole bread is not perfect and when the coating is in semi-liquid form (during initial stages of drying), the operation of crust separation was rendered even more complicated. The dotted lines in figure 2 point the moisture content value of the control samples at time zero without coating (top: $19.2 \pm 0.2\%$; bottom: $20.5 \pm 0.9\%$). Comparing these values with those measured at different drying times (table 1), it is possible to observe that these initial values were achieved within 90-120 minutes and at around 120 minutes, for the top and bottom surfaces respectively. However, due to the high variance of

the moisture content at same drying time, the optimal drying time for the top surface ranged from 90-120 min and for the bottom surface was at 120 min.

For drying at 60 °C, both one and two layers of coating have been considered and the moisture values are reported in table 1. The moisture content at different drying times are shown in figure 3, for the top (a) and bottom (b) surfaces, respectively. Considering the low relative humidity set up in the cabinet (RH=10%), a rapid decrease of moisture was observed for all samples. This trend is better observed for the samples with 2 layers of coating that dried for longer time. It can be observed clearly, that at any given drying time, the moisture content of the 2L samples is higher than 1L samples until 30 min of drying with the percentage difference being $25.8\pm 10.5\%$ and $26.0\pm 5.1\%$ for the top and bottom surfaces, respectively. After this time, the moisture content of the samples with one layer was not measured as the reference value of the control (top: $19.2\pm 0.5\%$; bottom: $20.5\pm 0.6\%$) was achieved. Also in this case, the dotted lines in figure 3 (3a, 3b) indicate the moisture content of the samples at time zero without coating. At the top surface, the optimal drying time was achieved at about 20 min for one layer and 30 min, for two layers; while at the bottom, the time was about 25-30 min and 40-50 min, for one and two layers, respectively. The drying time decreased by about 80% when the drying temperature increased from 25°C to 60 °C, both for the top and bottom surface (1L). Whereas, for the drying temperature of 60 °C, the drying time increased by 50% from one layer to two layers of coating for both the top and bottom surfaces evaluated.

The FT-NIR spectral band characterization was accomplished by comparing wavelengths with published infrared region data (Cevoli et al., 2015; Giangiacomo, 2006; Osborne et al., 1984; Suzuki et al., 1986). The NIR light molecular absorption of coated bread provided characteristic broad and overlapping peaks between 1100 and 2400 nm spectral region. All the analyzed samples show same spectral behaviour and are featured by the main absorption bands of water, protein and fat, as depicted in the representative spectra in figure 4. The

Savitzky–Golay first derivative clearly allowed the extraction of useful spectral band information. As reported by Cevoli et al (2015), at about 1,450 and 1,940, the resonance bands of the O–H bonds related to water and starch were observed, while at about 1,500–1,570 and 2,050– 2,070 nm the presence of N–H bonds can be hypothesized. The absorption peaks at 1,730 1,770 and 2,310 nm correspond to lipids and can be ascribed to the first overtone of a C–H stretch and to C–H₂ group.

The PCA score plots for the NIR spectra concerning the drying at 25°C was performed to discriminate between samples at different drying times. The best results were obtained by using the SNV spectral pre-treatment. As reported in figure 5, for both the bread surfaces (top (5a) and bottom (5b)), a clear separation along the drying time was observed. The samples were arranged along the PC1 (explained variance: 93% and 79%) from right to left, on the basis of the drying time (from 0 to 210 min). The loading plots suggested that the discrimination might be attributed to spectral regions associated with moisture and protein contribution. However, the protein information is submerged in the water bands, for the first overtone concerning 1,500nm (Wu et al., 2013). During the drying, the water evaporates and the protein fraction of the coating remains on the surface of the bread, resulting in the decrease of the moisture fraction and increase of the protein fraction. Similar inference has been found by Bouman et al., (2015) on drying of protein coatings using magnetic resonance imaging. However, a clear distinction was not observed, probably due to the variable moisture content at the same drying time related to non-uniform evaporation of water from the surface. This similar interference of spectra between samples was observed by Sinelli et al., (2011) and Wu et al., (2013) in their studies on dehydration of food products using NIRS and Hyper-spectral imaging (HSI). Moreover, it can be seen that the control samples (C) are placed along the PC1 in the same zone (grey area) of the samples dried for 90-120 minutes and 120-150 minutes, for the top and the bottom surfaces, respectively. These times are very similar to those previously reported in figure 2 and are comparable to the moisture content values.

The score plots obtained from the PCA of the NIR spectra acquired on the samples dried at 60 °C, are reported in figure 6 (6a, 6b). Also for 60 °C, the samples are arranged along the PC1 (explained variance 86% and 94%) from right to left, on the basis of the drying time (from 0 to 30 min for one layer (figure 6a) and from 0 to 60 min for two layers in (figure 6b)). A clear separation between samples at different drying times was observed, especially in the first 20 (1L) and 30 (2L) min of drying. In fact, the moisture content of the top and bottom crust continued to decrease also after these times, which is indicative of moisture loss from the product.

In view of the obtained results, it could be more interesting to define the optimal drying moment rather than the exact drying time, by determining the moisture content using NIR spectroscopy. Following this the spectral data to estimate the moisture content, were subjected to PLS regression and the results are reported in table 2. In general, satisfactory results were achieved for both the temperature and bread surfaces with a R^2 in test set ranging from 0.902 to 0.963. Analyzing the calibration, the full cross and the test set validation, the best model concerns the sample dried at 60 °C and covered by two layers of coating (top: $R^2=0.963$, RMSET=2.87%; bottom: $R^2=0.937$, RMSET=3.15%). The errors may be attributable to the moisture reference data that were affected by the samples preparation operations.

4. Conclusion

The results of the presented study show the application of NIR spectroscopy to monitor and identify the drying behaviour of coating on bread surfaces. In particular, PCA analysis of the spectral data was able to differentiate samples on the basis of decrease in moisture content along the drying time. The technique was useful to track the variances evolving mainly from the event of water evaporation, as the spectral differences reflect the resonance bands of the O–H stretch of water. Also, a clear differentiation of different bread surfaces was observed. Furthermore, PLS regression built on the basis of drying temperature and type of surface was found to provide satisfactory results for estimating the optimal drying moment within the

342 tested parameters. The developed method is fast and able to predict in a satisfactory way the
343 moisture decrease of the coating and can be a potential technique to estimate drying times.
344 However, further studies will be needed to verify the drying of the coatings alone and the
345 effect on interaction with substrate.

346

Funding

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors.

Declarations of interest: None

- Amigo, J.M., Del Olmo Alvarez, A., Engelsen, M.M., Lundkvist, H., Engelsen, S.B., 2016. Staling of white wheat bread crumb and effect of maltogenic α -amylases. Part 1: Spatial distribution and kinetic modeling of hardness and resilience. *Food Chem.* 208, 318–325. <https://doi.org/10.1016/j.foodchem.2016.02.162>
- Baeva, M., Panchev, I., 2005. Investigation of the retaining effect of a pectin-containing edible film upon the crumb ageing of dietetic sucrose-free sponge cake. *Food Chem.* 92, 343–348. <https://doi.org/10.1016/j.foodchem.2004.03.060>
- Balaguer, M.P., Lopez-Carballo, G., Catala, R., Gavara, R., Hernandez-Munoz, P., 2013. Antifungal properties of gliadin films incorporating cinnamaldehyde and application in active food packaging of bread and cheese spread foodstuffs. *Int. J. Food Microbiol.* 166, 369–377. <https://doi.org/10.1016/j.ijfoodmicro.2013.08.012>
- Bartolozzo, J., Borneo, R., Aguirre, A., 2016. Effect of triticale-based edible coating on muffin quality maintenance during storage. *J. Food Meas. Charact.* 10, 88–95. <https://doi.org/10.1007/s11694-015-9280-1>
- Besbes, E., Jury, V., Monteau, J.-Y., Le Bail, A., 2014. Effect of baking conditions and storage with crust on the moisture profile, local textural properties and staling kinetics of pan bread. *LWT - Food Sci. Technol.* 58, 658–666. <https://doi.org/10.1016/j.lwt.2014.02.037>
- Bouman, J., de Vries, R., Venema, P., Belton, P., Baukh, V., Huinink, H.P., van der Linden, E., 2015. Coating Formation During Drying of β -Lactoglobulin: Gradual and Sudden Changes. *Biomacromolecules* 16, 76–86. <https://doi.org/10.1021/bm501549b>
- Büning-Pfaue, H., 2003. Analysis of water in food by near infrared spectroscopy. *Food Chem.* 82, 107–115. [https://doi.org/10.1016/S0308-8146\(02\)00583-6](https://doi.org/10.1016/S0308-8146(02)00583-6)
- Campos, C.A., Gerschenson, L.N., Flores, S.K., 2011. Development of Edible Films and Coatings with Antimicrobial Activity. *Food Bioprocess Technol.* 4, 849–875. <https://doi.org/10.1007/s11947-010-0434-1>
- Cevoli, C., Gianotti, A., Troncoso, R., Fabbri, A., 2015. Quality evaluation by physical tests of a traditional Italian flat bread Piadina during storage and shelf-life improvement with sourdough and enzymes. *Eur. Food Res. Technol.* 240, 1081–1089. <https://doi.org/10.1007/s00217-015-2429-7>
- Chen, Q., Zhang, C., Zhao, J., Ouyang, Q., 2013. Recent advances in emerging imaging techniques for non-destructive detection of food quality and safety. *TrAC Trends Anal. Chem.* 52, 261–274. <https://doi.org/10.1016/j.trac.2013.09.007>
- Chin, N.L., Abdullah, R., Yusof, Y.A., 2011. Glazing effects on bread crust and crumb staling during storage. *J. Texture Stud.* 42, 459–467. <https://doi.org/10.1111/j.1745-4603.2011.00307.x>
- Costa, M.J., Maciel, L.C., Teixeira, J.A., Vicente, A.A., Cerqueira, M.A., 2018. Use of edible films and coatings in cheese preservation: Opportunities and challenges. *Food Res. Int.* 107, 84–92. <https://doi.org/10.1016/j.foodres.2018.02.013>
- Czaja, T., Kuzawińska, E., Sobota, A., Szostak, R., 2018. Determining moisture content in pasta by vibrational spectroscopy. *Talanta* 178, 294–298.

395 <https://doi.org/10.1016.2017.09.050>

- 396 Debeaufort, F., Quezada-Gallo, J.A., Voilley, A., 1998. Edible films and coatings:
397 tomorrow's packagings: a review. *Crit. Rev. Food Sci. Nutr.* 38, 299–313.
398 <https://doi.org/10.1080/10408699891274219>
- 399 Dehghani, S., Hosseini, S.V., Regenstein, J.M., 2018. Edible films and coatings in seafood
400 preservation: A review. *Food Chem.* 240, 505–513.
401 <https://doi.org/10.1016/j.foodchem.2017.07.034>
- 402 Di Scala, K., Crapiste, G., 2008. Drying kinetics and quality changes during drying of red
403 pepper. *LWT - Food Sci. Technol.* 41, 789–795.
404 <https://doi.org/10.1016/j.lwt.2007.06.007>
- 405 Falguera, V., Quintero, J.P., Jiménez, A., Muñoz, J.A., Ibarz, A., 2011. Edible films and
406 coatings: Structures, active functions and trends in their use. *Trends Food Sci. Technol.*
407 22, 292–303. <https://doi.org/10.1016/j.tifs.2011.02.004>
- 408 Ferreira Saraiva, L.E., Naponucena, L. de O.M., da Silva Santos, V., Silva, R.P.D., de Souza,
409 C.O., Evelyn Gomes Lima Souza, I., de Oliveira Mamede, M.E., Druzian, J.I., 2016.
410 Development and application of edible film of active potato starch to extend mini
411 panettone shelf life. *LWT* 73, 311–319. <https://doi.org/10.1016/j.lwt.2016.05.047>
- 412 Foca, G., Ferrari, C., Sinelli, N., Mariotti, M., Lucisano, M., Caramanico, R., Ulrici, A., 2011.
413 Minimisation of instrumental noise in the acquisition of FT-NIR spectra of bread wheat
414 using experimental design and signal processing techniques. *Anal. Bioanal. Chem.* 399,
415 1965–1973. <https://doi.org/10.1007/s00216-010-4431-z>
- 416 Galus, S., Kadzińska, J., 2015. Food applications of emulsion-based edible films and coatings.
417 *Trends Food Sci. Technol.* 45, 273–283. <https://doi.org/10.1016/j.tifs.2015.07.011>
- 418 Giangiacomo, R., 2006. Study of water–sugar interactions at increasing sugar concentration
419 by NIR spectroscopy. *Food Chem.* 96, 371–379.
420 <https://doi.org/10.1016/j.foodchem.2005.02.051>
- 421 Gray, J.A., Bemiller, J.N., 2003. Bread Staling: Molecular Basis and Control. *Compr. Rev.*
422 *Food Sci. Food Saf.* 2, 1–21. <https://doi.org/10.1111/j.1541-4337.2003.tb00011.x>
- 423 Guldaz, M., Bayazit, A.A., Yilsay, T.O., Yilmaz, L., 2010. Effects of edible film coatings on
424 shelf-life of mustafakemalpaşa sweet, a cheese based dessert. *J. Food Sci. Technol.* 47,
425 476–481. <https://doi.org/10.1007/s13197-010-0081-6>
- 426 He, H.-J., Wu, D., Sun, D.-W., 2014. Rapid and non-destructive determination of drip loss
427 and pH distribution in farmed Atlantic salmon (*Salmo salar*) fillets using visible and
428 near-infrared (Vis-NIR) hyperspectral imaging. *Food Chem.* 156, 394–401.
429 <https://doi.org/10.1016/j.foodchem.2014.01.118>
- 430 He, H., Hoseney, R.C., 1990. Changes in Bread Firmness and Moisture During Long-Term
431 Storage. *Cereal Chem.* 67, 603–605.
- 432 Huang, H., Yu, H., Xu, H., Ying, Y., 2008. Near infrared spectroscopy for on/in-line
433 monitoring of quality in foods and beverages: A review. *J. Food Eng.* 87, 303–313.
434 <https://doi.org/10.1016/j.jfoodeng.2007.12.022>
- 435 Javanmard, M., Golestan, L., 2008. Effect of olive oil and glycerol on physical properties of
436 whey protein concentrate films. *J. Food Process Eng.* 31, 628–639.

- 437 <https://doi.org/10.1111/j.1745-4530.2007.00179.x>
- 438 Jirsa, O., Hrušková, M., Švec, I., 2007. Bread features evaluation by NIR analysis. Czech J.
439 Food Sci.
- 440 Kester, J.J., Fennema, O.R., 1986. Edible films and coatings: a review. Food Technol.
441 (Chicago, IL, United States).
- 442 Kozempel, M., McAloon, A.J., Tomasula, P.M., 2003. Drying kinetics of calcium caseinate.
443 J. Agric. Food Chem. 51, 773–6. <https://doi.org/10.1021/jf020634k>
- 444 Lahsasni, S., Kouhila, M., Mahrouz, M., Jaouhari, J.T., 2004. Drying kinetics of prickly pear
445 fruit (*Opuntia ficus indica*). J. Food Eng. 61, 173–179. [https://doi.org/10.1016/S0260-](https://doi.org/10.1016/S0260-8774(03)00084-0)
446 [8774\(03\)00084-0](https://doi.org/10.1016/S0260-8774(03)00084-0)
- 447 Licciardello, F., Cipri, L., Muratore, G., 2014. Influence of packaging on the quality
448 maintenance of industrial bread by comparative shelf life testing. Food Packag. Shelf
449 Life 1, 19–24. <https://doi.org/10.1016/j.fpsl.2013.10.001>
- 450 Licciardello, F., Giannone, V., Del Nobile, M.A., Muratore, G., Summo, C., Giarnetti, M.,
451 Caponio, F., Paradiso, V.M., Pasqualone, A., 2017. Shelf life assessment of industrial
452 durum wheat bread as a function of packaging system. Food Chem. 224, 181–190.
453 <https://doi.org/10.1016/j.foodchem.2016.12.080>
- 454 Mohammadi-Moghaddam, T., Razavi, S.M.A., Taghizadeh, M., Pradhan, B., Sazgarnia, A.,
455 Shaker-Ardekani, A., 2018. Hyperspectral imaging as an effective tool for prediction the
456 moisture content and textural characteristics of roasted pistachio kernels. J. Food Meas.
457 Charact. 1–10. <https://doi.org/10.1007/s11694-018-9764-x>
- 458 Ncama, K., Magwaza, L.S., Mditshwa, A., Tesfay, S.Z., 2018. Plant-based edible coatings for
459 managing postharvest quality of fresh horticultural produce: A review. Food Packag.
460 Shelf Life 16, 157–167. <https://doi.org/10.1016/j.fpsl.2018.03.011>
- 461 Osborne, B.G., 1996. Near Infrared Spectroscopic Studies of Starch and Water in Some
462 Processed Cereal Foods. J. Near Infrared Spectrosc. 4, 195–200.
463 <https://doi.org/10.1255/jnirs.90>
- 464 Osborne, B.G., Fearn, T., Miller, A.R., Douglas, S., 1984. Application of near infrared
465 reflectance spectroscopy to the compositional analysis of biscuits and biscuit doughs. J.
466 Sci. Food Agric. 35, 99–105. <https://doi.org/10.1002/jsfa.2740350116>
- 467 Otoni, C.G., Avena-Bustillos, R.J., Azeredo, H.M.C., Lorevice, M. V., Moura, M.R.,
468 Mattoso, L.H.C., McHugh, T.H., 2017. Recent Advances on Edible Films Based on
469 Fruits and Vegetables-A Review. Compr. Rev. Food Sci. Food Saf. 16, 1151–1169.
470 <https://doi.org/10.1111/1541-4337.12281>
- 471 Otoni, C.G., Pontes, S.F.O., Medeiros, E.A.A., Soares, N.D.F.F., 2014. Edible Films from
472 Methylcellulose and Nanoemulsions of Clove Bud (*Syzygium aromaticum*) and
473 Oregano (*Origanum vulgare*) Essential Oils as Shelf Life Extenders for Sliced Bread. J.
474 Agric. Food Chem. 62, 5214–5219. <https://doi.org/10.1021/jf501055f>
- 475 Özdemir, İ.S., Öztürk, B., Çelik, B., Sarıtepe, Y., Aksoy, H., 2018. Rapid, simultaneous and
476 non-destructive assessment of the moisture, water activity, firmness and SO₂ content of
477 the intact sulphured-dried apricots using FT-NIRS and chemometrics. Talanta 186, 467–
478 472. <https://doi.org/10.1016/j.talanta.2018.05.007>

- Planinić, M., Velić, D., Tomas, S., Bilić, M., Bucić, A., 2005. Modelling of drying and rehydration of carrots using Peleg's model. *Eur. Food Res. Technol.* 221, 446–451. <https://doi.org/10.1007/s00217-005-1200-x>
- Sinelli, N., Casiraghi, E., Barzaghi, S., Brambilla, A., Giovanelli, G., 2011. Near infrared (NIR) spectroscopy as a tool for monitoring blueberry osmo-air dehydration process. *Food Res. Int.* 44, 1427–1433. <https://doi.org/10.1016/j.foodres.2011.02.046>
- Sørensen, L.K., 2009. Application of reflectance near infrared spectroscopy for bread analyses. *Food Chem.* 113, 1318–1322. <https://doi.org/10.1016/j.foodchem.2008.08.065>
- Soukoulis, C., Yonekura, L., Gan, H.H., Behboudi-Jobbehdar, S., Parmenter, C., Fisk, I., 2014. Probiotic edible films as a new strategy for developing functional bakery products: The case of pan bread. *Food Hydrocoll.* 39, 231–242. <https://doi.org/10.1016/j.foodhyd.2014.01.023>
- Suzuki, K., McDonald, C.E., D'Appolonia, B.L., 1986. Near-infrared reflectance analysis of bread. *Cereal Chem.*
- Todt, H., Guthausen, G., Burk, W., Schmalbein, D., Kamlowksi, A., 2006. Water/moisture and fat analysis by time-domain NMR. *Food Chem.* 96, 436–440. <https://doi.org/10.1016/j.foodchem.2005.04.032>
- Tongnuanchan, P., Benjakul, S., 2014. Essential oils: extraction, bioactivities, and their uses for food preservation. *J. Food Sci.* 79, R1231–49. <https://doi.org/10.1111/1750-3841.12492>
- Wilson, R.H., Goodfellow, B.J., Belton, P.S., Osborne, B.G., Oliver, G., Russell, P.L., 1991. Comparison of fourier transform mid infrared spectroscopy and near infrared reflectance spectroscopy with differential scanning calorimetry for the study of the staling of bread. *J. Sci. Food Agric.* 54, 471–483. <https://doi.org/10.1002/jsfa.2740540318>
- Wu, D., Wang, S., Wang, N., Nie, P., He, Y., Sun, D.-W., Yao, J., 2013. Application of Time Series Hyperspectral Imaging (TS-HSI) for Determining Water Distribution Within Beef and Spectral Kinetic Analysis During Dehydration. *Food Bioprocess Technol.* 6, 2943–2958. <https://doi.org/10.1007/s11947-012-0928-0>
- Xie, F., Dowell, F.E., Sun, X.S., 2003. Comparison of near-infrared reflectance spectroscopy and texture analyzer for measuring wheat bread changes in storage. *Cereal Chem.* 80, 25–29. <https://doi.org/10.1094/CCHEM.2003.80.1.25>
- Yousuf, B., Qadri, O.S., Srivastava, A.K., 2018. Recent developments in shelf-life extension of fresh-cut fruits and vegetables by application of different edible coatings: A review. *LWT - Food Sci. Technol.* 89, 198–209. <https://doi.org/10.1016/j.lwt.2017.10.051>

1 **Figure Captions**

2 **Figure 1:** Schematic representation of the NIR measurement: 1) personal computer, 2) NIR
3 device, 3) fiber probe, 4) bread sample.

4 **Figure 2:** Moisture content (%) for 1L of coating against the drying time for temperature of
5 25 °C.

6 **Figure 3:** Moisture content (%) for 1L and 2L of coating against the drying time for
7 temperature of 60 °C; a) top surface, b) bottom surface.

8 **Figure 4:** Representative NIR spectrum of coated bread and the relative first derivate

9 **Figure 5:** PCA Score plots of the NIR spectra of the top (a) and bottom (b) surfaces of the
10 samples dried at 25 °C (C: control samples; 0, 30, 60, 90, 120, 150, 180 and 210 min:
11 samples at respective drying times).

12 **Figure 6:** PCA Score plots of the NIR spectra of the top surface of the samples with one
13 layer of coating (a) and two layers of coating (b) dried at 60 °C (C: control samples; 0, 5,10,
14 15, 20, 25, 30, 40, 50 and 60 min: samples at respective drying times).

Table 1. Moisture content (%) during drying for coated bread with 1 Layer (1L) at 25°C, 1 Layer (1L) at 60°C and 2 Layers (2L) at 60°C

	Time (min)	Moisture content (%)	
		Top	Bottom
25°C	0	49.2±3.4 ^a	54.2±5.4 ^a
	30	38.1±2.5 ^b	46.5±1.6 ^b
	60	24.7±4.7 ^c	39.0±1.4 ^c
	90	21.4±3.4 ^{cd}	25.5±3.0 ^d
	120	17.6±1.4 ^d	22.0±2.4 ^{de}
	150	16.5±1.6 ^d	17.5±1.3 ^e
	180	15.7±1.2 ^d	17.1±0.4 ^e
	210	16.4±0.4 ^d	18.4±1.2 ^e
60°C 1L	0	47.1±1.5 ^a	48.4±4.4 ^a
	5	41.6±0.9 ^a	47.8±3.2 ^a
	10	28.5±4.9 ^b	38.1±4.0 ^b
	15	25.0±3.2 ^b	32.2±2.7 ^c
	20	19.7±2.1 ^c	27.8±2.0 ^c
	25	17.3±1.1 ^c	20.9±1.2 ^d
	30	16.0±1.1 ^c	20.0±1.1 ^d
60°C 2L	0	53.5±4.4 ^a	57.9±3.8 ^a
	10	44.8±3.2 ^b	51.9±2.8 ^b
	20	32.0±4.0 ^c	39.9±3.5 ^c
	30	19.2±2.7 ^d	28.8±2.7 ^d
	40	16.7±2.0 ^{de}	23.9±3.8 ^{de}
	50	15.1±1.2 ^e	18.7±2.3 ^{ef}
	60	13.6±1.1 ^e	16.6±1.9 ^f

Mean ±SD in a column without a common superscript letter differ significantly ($P < 0.05$)

Table 2: PLS regression calibration parameters of the NIR spectra for predicting moisture content (%) in coated bread.

		Calibration			Full Cross Validation			Test set		
		LVs	R ²	RMSEC (%)	LVs	R ²	RMSECV (%)	LVs	R ²	RMSET (%)
25°C	Top	1	0.927	2.25	1	0.921	2.45	2	0.918	2.51
1L	Bottom	8	0.986	1.07	8	0.933	2.28	7	0.922	2.66
60°C	Top	5	0.968	1.58	5	0.950	2.04	5	0.932	2.26
1L	Bottom	2	0.924	2.84	2	0.914	3.08	2	0.902	3.12
60°C	Top	1	0.973	2.29	1	0.969	2.49	1	0.963	2.87
2L	Bottom	2	0.958	2.91	2	0.954	3.08	2	0.937	3.15

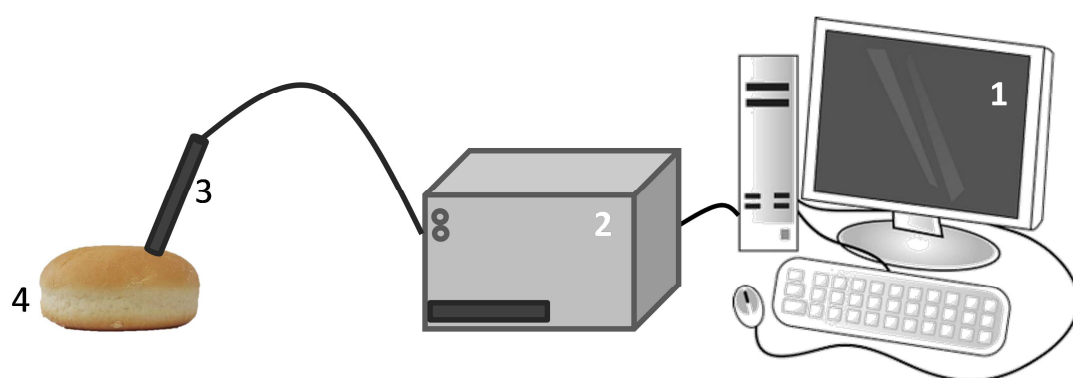


Figure 1

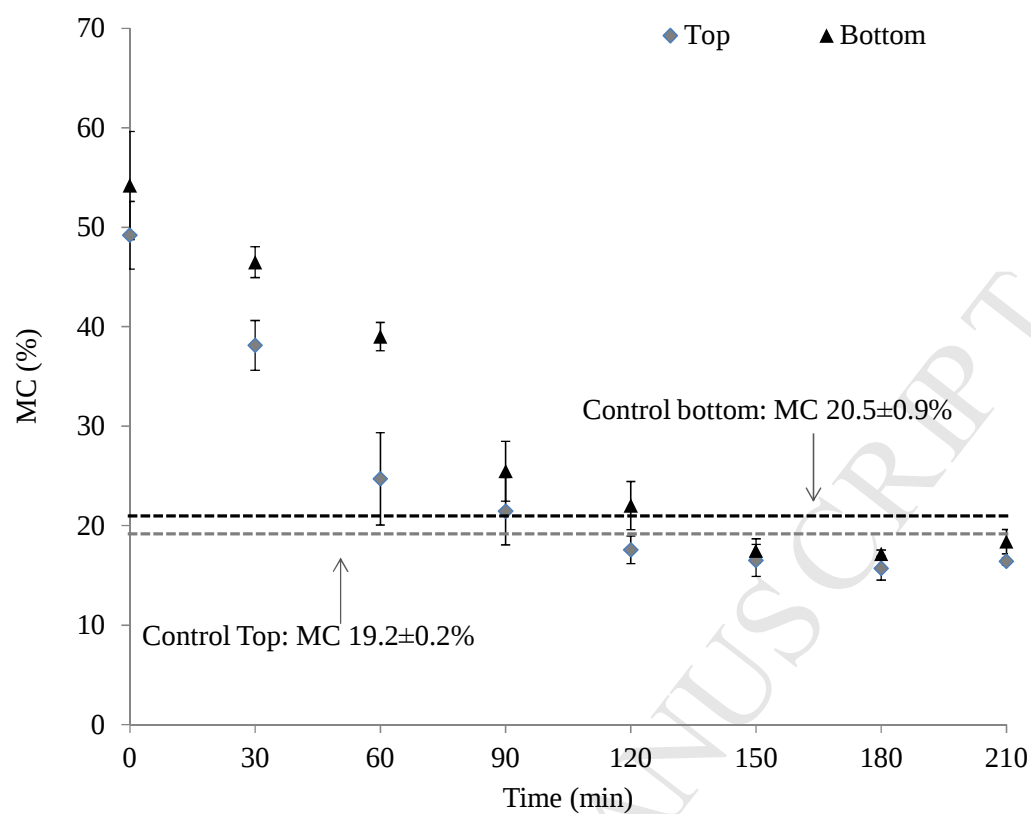
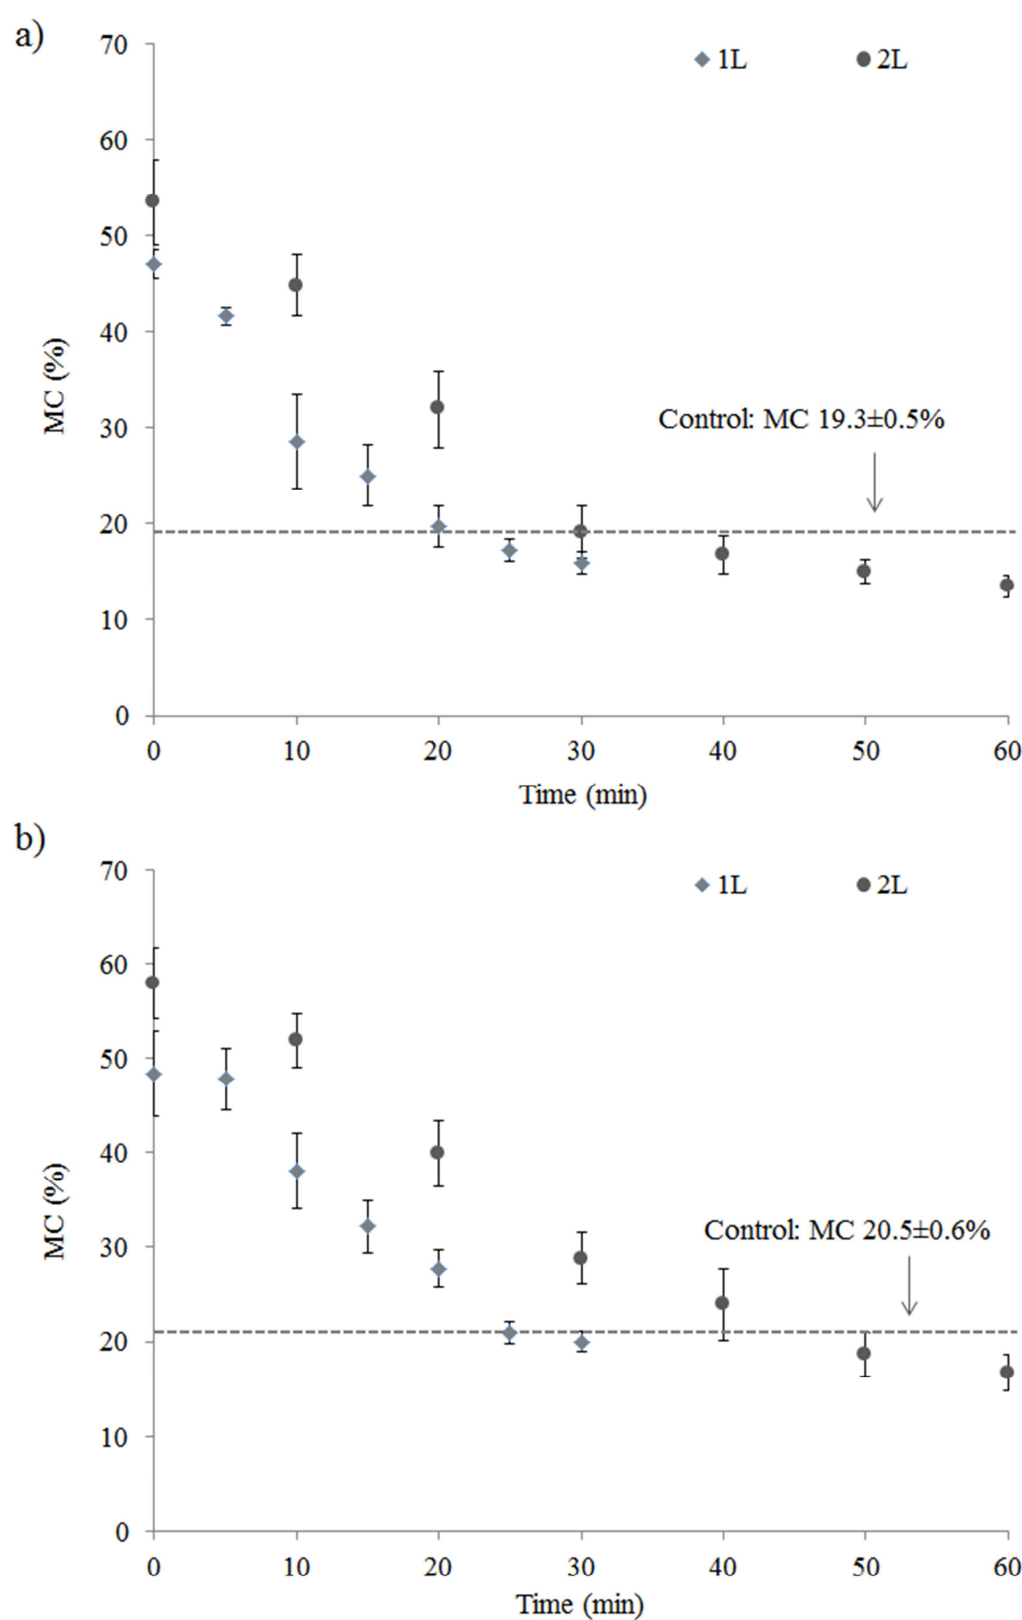
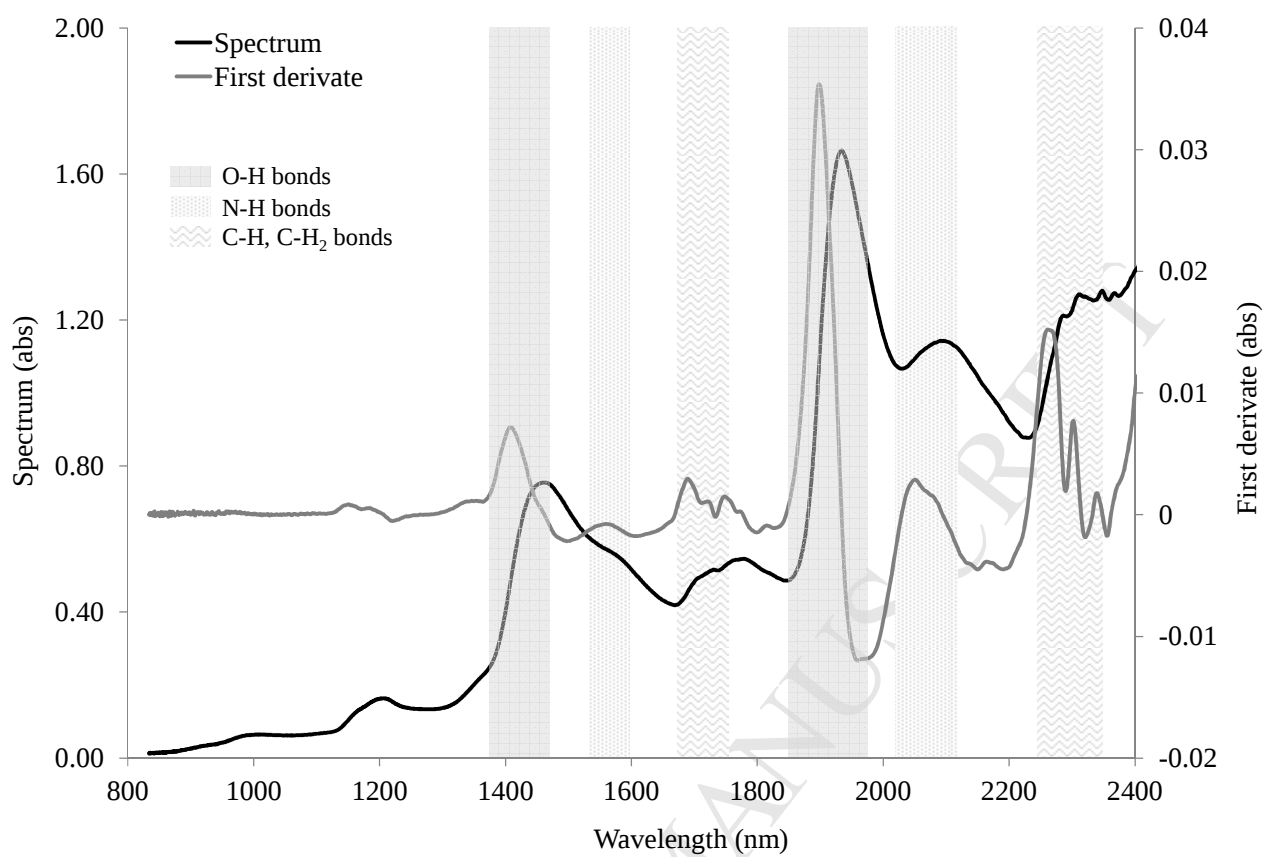


Figure 2.

**Figure 3.**

**Figure 4.**

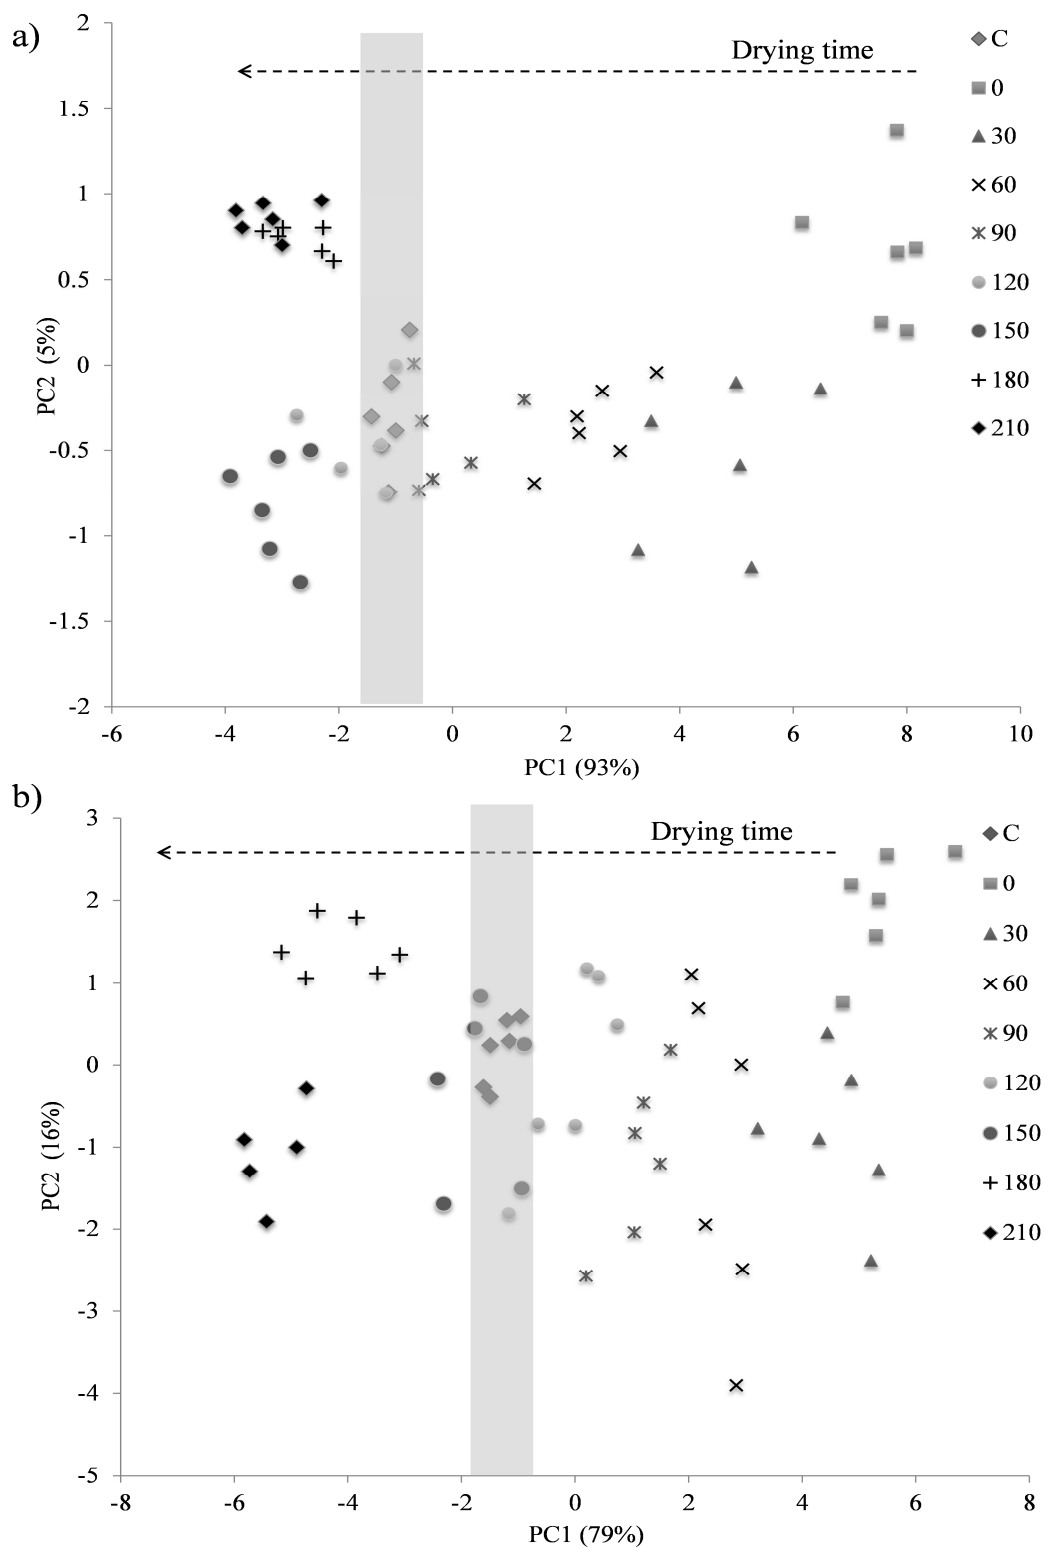
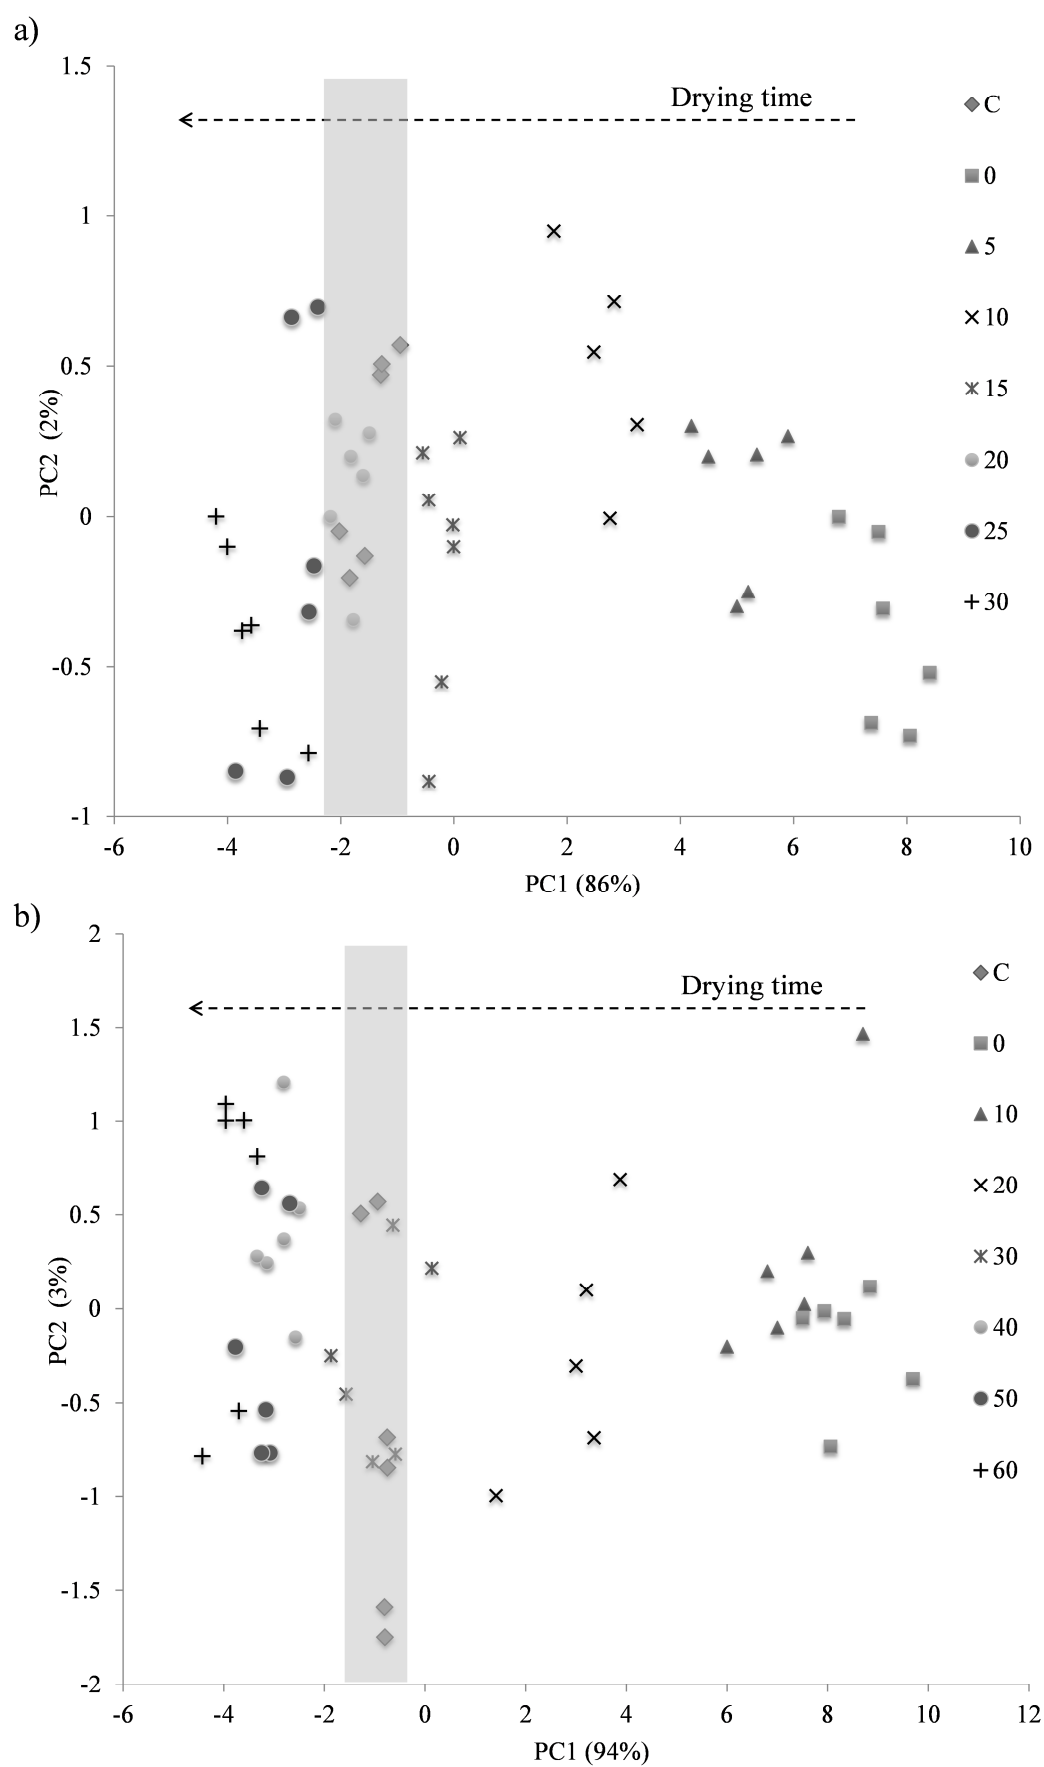


Figure 5.

**Figure 6.**

1 Highlights

- 2 • Edible coating drying behavior at different temperatures and levels of coating
- 3 considered.
- 4 • Near Infrared spectra useful for monitoring coating process.
- 5 • Drying time discrimination based on time and surfaces by PCA.
- 6 • PLS regression models estimate optimal drying moment.