

Alma Mater Studiorum Università di Bologna  
Archivio istituzionale della ricerca

A broadband current sensor based on the X-Hall architecture

This is the final peer-reviewed author's accepted manuscript (postprint) of the following publication:

*Published Version:*

A broadband current sensor based on the X-Hall architecture / Crescentini M.; Biondi M.; Ramilli R.; Traverso P.A.; Gibiino G.P.; Romani A.; Tartagni M.; Marchesi M.; Canegallo R.. - ELETTRONICO. - (2019), pp. 8964955.807-8964955.810. (Intervento presentato al convegno 26th IEEE International Conference on Electronics, Circuits and Systems, ICECS 2019 tenutosi a Genova, Italia nel NOV 27-29, 2019) [10.1109/ICECS46596.2019.8964955].

*Availability:*

This version is available at: <https://hdl.handle.net/11585/736155> since: 2020-03-01

*Published:*

DOI: <http://doi.org/10.1109/ICECS46596.2019.8964955>

*Terms of use:*

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).  
When citing, please refer to the published version.

(Article begins on next page)

This is the final peer-reviewed accepted manuscript of:

M. Crescentini *et al.*, "A Broadband Current Sensor based on the X-Hall Architecture," *2019 26th IEEE International Conference on Electronics, Circuits and Systems (ICECS)*, Genoa, Italy, 2019, pp. 807-810.

The final published version is available online at DOI:  
[10.1109/ICECS46596.2019.8964955](https://doi.org/10.1109/ICECS46596.2019.8964955)

Rights / License:

The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

*This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>)*

***When citing, please refer to the published version.***

# A Broadband Current Sensor based on the X-Hall Architecture

M. Crescentini, M. Biondi, R. Ramilli, P. A. Traverso,  
G. P. Gibiino, A. Romani, M. Tartagni  
DEI and ARCES  
University of Bologna  
Cesena, Italy  
m.crescentini@unibo.it

M. Marchesi, R. Canegallo  
Analog & Smart Power R&D  
STMicroelectronics  
Castelletto, Italy  
marco.marchesi@st.com

**Abstract**— A broadband current sensor, which is fully integrated and galvanically-isolated, is presented in this paper. The current sensor relies only on a Hall-effect probe to realize the magnetic sensing core so as to minimize the cost and the occupied space. Bandwidth limitations of state-of-the-art Hall-effect probes are overcome by combining the novel X-Hall architecture with a wide bandwidth differential-difference current-feedback amplifier. A prototype implemented in 0.16- $\mu\text{m}$  BCD technology demonstrates a bandwidth wider than 20 MHz. Offset, sensitivity and power consumption are comparable to the state of the art. This is the first Hall-only current sensor achieving a bandwidth higher than 3 MHz.

**Keywords**— Current sensor, Hall sensor, XHall, Magnetic sensor, Bandwidth, CFA, DDA, CMOS, BCD, Offset reduction.

## I. INTRODUCTION

Current sensors are crucial in many power circuits: they are used for feedback control, overcurrent detection (OCD) and other functionalities [1]. The modern trend in power electronics (e.g. automotive applications) is to move the switching rate of the power circuits to higher frequencies (up to the MHz range) so as to allow the shrinking of the passive components. As a consequence, there is a strong need for broadband current sensors which are small and, preferably, galvanically isolated from the power path. There exist different technological solutions for current measurements in power applications; they can be grouped as i) shunt-based sensors ii) coil-based magnetic sensors, and iii) Lorentz' magnetic sensors (e.g. Hall-effect). Table I summarizes and quickly compares the state of the art for all these sensor typologies. For each type of current sensor, the table highlights in red the challenges to be addressed so as to achieve all the specifications required by fast-switching power circuits. The high compatibility of Hall-effect sensors with standard CMOS processes allows the Hall-effect sensors to inherently achieve the targets of low-cost and reduced dimension, but the state-of-the-art bandwidth is not fully adequate since it is demonstrated up to 1 MHz [4]. A complete analysis of the dynamic effects in Hall-effect-based current sensors shows that the first limitation to the bandwidth is given by the spinning-current technique, which is the dynamic technique used to cancel the high intrinsic offset of the sensor, as well as the Flicker noise [5,6]. Therefore, to broaden the bandwidth up to tens of megahertz, it is essential

TABLE I. OVERVIEW OF STATE-OF-THE-ART CURRENT SENSORS

Sensor Type	Bandwidth	DC measure	CMOS integration	Galvanic Isolation	Heat Dissipation	Occupied Space	Cost
SHUNT [2]	high	yes	possible	no	yes	huge	low
COIL [3]	very high	no	hard	yes	no	huge	high
HALL [4]	limited	yes	easy	yes	no	small	low

to eliminate the spinning-current technique and identify a static method able to reduce the high intrinsic offset of the sensor.

In this paper, a broadband current sensor relying only on the Hall-effect is presented. The sensor overcomes the bandwidth limitation of state-of-the-art Hall-effect sensors by combining the novel X-Hall DC biasing technique with a wide-bandwidth differential-difference current-feedback amplifier (DDCFA) (Fig. 1). The proposed sensor responds to all the requirements coming from fast-switching power circuits by offering a small, low-cost, and fast current sensor. The basic idea behind the X-Hall technique was presented, for the first time ever, at the 2018 IMEKO World Congress but only theoretical analysis and static measurements on the probe were reported [7]. In this paper, the X-Hall probe is combined with a dedicated readout circuit to realize a complete current sensor and dynamic performance are experimentally demonstrated.

A prototype of the proposed current sensor is implemented in 0.16- $\mu\text{m}$  BCD technology. The magnetic field is generated by a current flowing through an on-chip copper strip and applies to the Hall-effect probe closed to it. The Hall voltage provided by the probe, to which a residual offset is superimposed, is then amplified by the broadband DDCFA. Preliminary measurements demonstrate an acquisition bandwidth of 20 MHz and show the potentiality to achieve even wider bandwidths. To our knowledge, this is the first Hall-only current sensor achieving a bandwidth higher than 3 MHz. Section II and Section III describes the X-Hall probe and the DDCFA, respectively. Section IV reports the experimental results, while Section V draws the final conclusions.



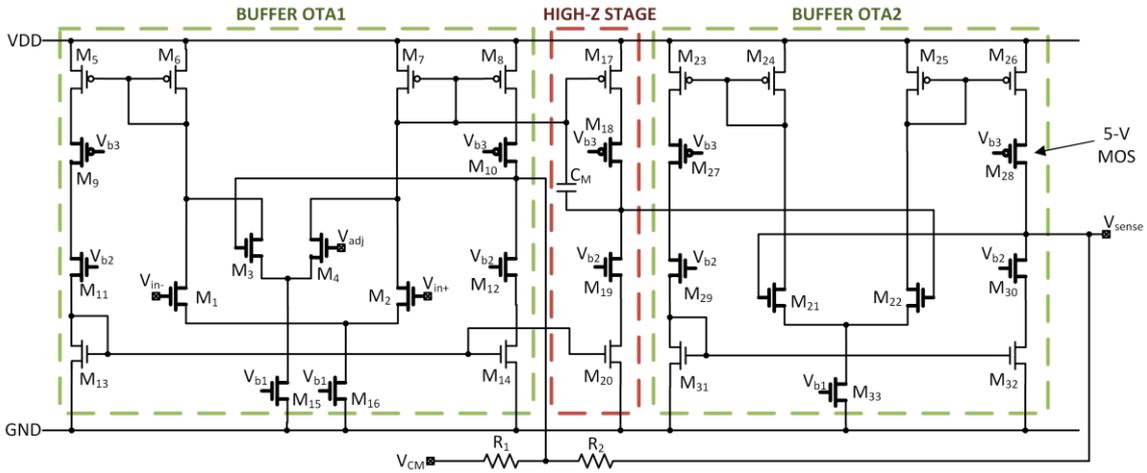


Fig. 4. Schematic diagram of the DDCFA highlighting the different types of MOSFETS.

input impedance. Offset issue is mitigated by designing the buffers of the CFA architecture as highly-symmetric, cascoded-output, single-stage, operational-transconductance amplifiers (OTA) in unity gain feedback. To amplify the differential output voltage  $V_{probe}$  of the Hall sensor without sinking an appreciable current, the OTA1 is a differential-difference amplifier (DDA) connected in instrumentation amplifier mode with the gain set to 1. This architecture of the OTA1 also provides an additional input ( $V_{adj}$ ) to compensate for the offset of the CFA as well as the residual offset of the Hall sensor. Another important aspect of the OTA1 is the input capacitance that must be minimized without impinging on the open-loop gain of the OTA1 [6]. To this end, the two differential coupled pairs of the OTA1 are implemented by using 5-V graded MOSFETS with thick gate oxide and setting their size factor at the minimum value that allows achieving the target open-loop gain. On the contrary, all the current mirrors of both the OTAs are realized by using smaller 1.8-V graded MOSFETS to exploit their better dynamic performance and push the bandwidth of the whole amplifier to higher frequencies. Since the amplifier is 5-V supplied, all the 1.8-V MOSFETS are protected by cascoded 5-V MOSFETS that handle the high source-drain voltage drop. The gain stage of the CFA is realized by mirroring the output current of the OTA1 to a high-impedance node. A Miller capacitance is added for pole-zero cancellation. The OTA2 looks alike to OTA1 without differential-difference input.

All the transistors were sized to set the bandwidth above 50 MHz and minimize the total input-referred noise power, accounting for both Flicker noise and thermal noise. The CFA was optimized to work with a closed-loop gain of 35 dB given by resistive feedback with  $R_1 = 50 \Omega$  and  $R_2 = 2 \text{ k}\Omega$ , and a maximum capacitive load at the output of 5 pF. The simulated GBW of the proposed DDCFA is 3.75 GHz with a load capacitance of 1 pF. An output stage with gain set to 2 is placed after the DDCFA to cope with external loads.

#### IV. MEASUREMENT RESULTS

A prototype of the current sensor is implemented in 0.16- $\mu\text{m}$  BCD8 technology provided by STMicroelectronics (Fig. 5). The silicon die is 4- $\text{mm}^2$  large but a single current sensor

occupies approximately 1  $\text{mm}^2$  (the rest of the area is used for replica circuits and testing structures) and could be shrunk even more by optimizing the layout. Post-layout simulations of the complete current sensor report a typical current consumption of 5.5 mA (25 mW), which is in agreement with the state-of-the-art (Table II).

The sensitivity of the current sensor is given by the combination of the current-to-magnetic field transduction factor (approximately 2 mT/A from FEM simulations), the absolute sensitivity of the Hall probe, and the gain of the amplifier (100 from circuitual simulations). They all are fixed gain factors apart from the sensitivity of the Hall-probe that is proportional to the bias current  $I_{bias} = I_A + I_B$ . Fig. 6-left reports the measured static characteristic of the current sensor for bias currents of 1 mA and 1.8 mA, reporting a total sensitivity of 23 mV/A (11.5 V/T) and 36 mV/A (18 V/T), respectively, which are comparable to the state of the art. The reference input current is generated by a controlled DC voltage supply applied across a known 1- $\Omega$  resistor. The input current used to make the static characteristic has been limited between -10 A and 10 A due to the testing setup but the current sensor can handle input currents as high as 20 A. The prototype shows a static linearity error of less than 1% (inset of Fig. 6-left) that is good for the target applications. Noise performance is evaluated by means of the input-referred noise power spectrum density (PSD), which is shown in Fig. 6-center. The noise PSD shows an important Flicker noise component and a total rms noise of about 75  $\mu\text{A}$ . The frequency response of the current sensor

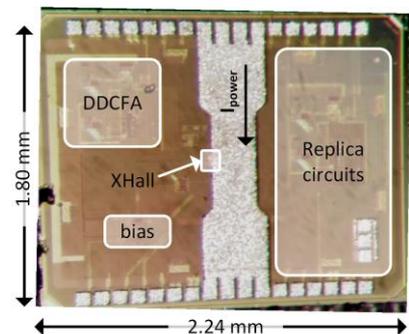


Fig. 5. Chip microphotograph.

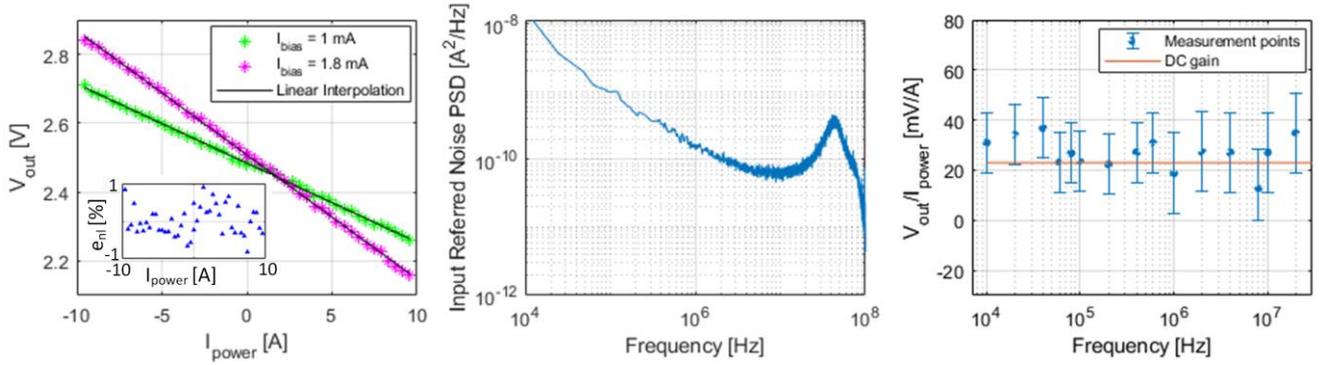


Fig. 6. left) Static characteristic of the current sensor for two different bias currents. Non-linearity error in the inset. center) Input-referred noise Power Spectrum Density computed at  $I_{\text{bias}} = 1$  mA and showing a corner frequency at around 4 MHz. Noise peak at high frequencies is related to the second-order response of the DDCFA. right) Estimated transfer function up to 20 MHz after compensation for the inductive parasitic effect.

was preliminarily characterized by exciting the sensor with a pure sine-wave current input and performing FFT analysis on the output response of the sensor. The transfer function (TF) of the sensor was computed by dividing the output peak by the input sine wave amplitude and the estimated TF is shown in Fig. 6-right. Due to limitations in the available instrumentation, the amplitude of the exciting current sine wave was set to 100 mA, which is barely higher than the input-referred rms noise. This results in great variability in the estimation of each point of the TF. The prototype shows an unpredictable inductive parasitic effect that adds a coherent interference at the output of the current sensor. This interference was characterized and compensated by implementing a low-pass digital filter on the sensor output data. At higher frequencies, the parasitic element causes the saturation of the DDCFA and the TF cannot be correctly estimated. Though the parasitic effect limits the

bandwidth of the prototype to 20 MHz (fig. 6-right) the sensor still overcomes the state of the art and can be used to record fast switching currents. Fig. 7 shows the fast transition (60 ns) of a 5-Vpp voltage (green line) across a 50- $\Omega$  resistor. The consequent current transition is recorded by using both a commercial 100-MHz current probe (red line) (Keysight N2783A) and our current sensor prototype (yellow line). The parasitic effects stress the overshoots in  $V_{\text{OUT}}$ , but the sensor is still able to detect the current edge with a delay comparable to that of the commercial probe.

## V. CONCLUSION

The presented current sensor combines the X-Hall technique with a broadband DDCFA to enlarge the bandwidth of Hall-effect based current sensors. Though the realized prototype suffers from an inductive parasitic effect that limits the bandwidth, a 20-MHz bandwidth has been demonstrated, with the potentiality to be even wider. To our knowledge, this is the first Hall-effect probe that achieves a bandwidth higher than 3 MHz. Functionality of the sensor has been demonstrated in the detection of a fast current edge, but characterization of temperature dispersion must be still performed.

## REFERENCES

- [1] Y. Li, M. Motz, and L. Raghavan, "A Signal and Offset T&H Frontend for Spinning Hall Sensors with Ping-Pong and Chopping Techniques," in *ESSCIRC 2018*, 2018, pp. 338–341.
- [2] L. Xu, J. H. Huijsing, and K. A. A. Makinwa, "A  $\pm 4$ A high-side current sensor with 25V input CM range and 0.9% gain error from  $-40^\circ\text{C}$  to  $85^\circ\text{C}$  using an analog temperature compensation technique," in *2018 IEEE ISSCC*, 2018, pp. 324–326.
- [3] T. Funk and B. Wicht, "A Fully Integrated DC to 75 MHz Current Sensing Circuit with On-Chip Rogowski Coil," in *CICC*, pp. 6–9, 2018.
- [4] D. Bellasi, et al, "A Broadband Multi-Mode Compressive Sensing Current Sensor SoC in 0.16 $\mu\text{m}$  CMOS," *IEEE Trans. Circuits Syst. I Regul. Pap.*, vol. 66, no. 1, pp. 105–118, Jan. 2019.
- [5] M. Crescentini, et al., "Bandwidth Limits in Hall Effect-based Current Sensors," *Acta-IMEKO*, vol. 6, no. 4, pp. 17–24, 2017.
- [6] M. Crescentini, M. Marchesi, A. Romani, M. Tartagni, and P. A. Traverso, "A Broadband, On-Chip Sensor Based on Hall Effect for Current Measurements in Smart Power Circuits," *IEEE Trans. Instrum. Meas.*, vol. 67, no. 6, pp. 1470–1485, 2018.
- [7] M. Crescentini, M. Biondi, M. Marchesi, A. Romani, M. Tartagni, and P. A. Traverso, "Bandwidth enhancement in Hall probe by X-Hall DC biasing," *J. Phys. Conf. Ser.*, vol. 1065, no. 5, Aug. 2018.



Fig. 7. Detection of a 60-ns current edge.

TABLE II. STATE-OF-THE-ART COMPARISON TABLE

	Sensor Type	Tech node [ $\mu\text{m}$ ]	Area [ $\text{mm}^2$ ]	Bandwidth [MHz]	Input Range [A]	Supply [mA]	Sensitivity [mV/A]
[1]	Hall	0.35	/	1.7	300	4	/
[3]	Hall+coil	0.18	3.17	75	$\pm 40$	18.7	43.5
[5]	Hall	0.16	4	1	$\pm 10$	4.4	42.5
THIS WORK	Hall	0.16	4	20	$\pm 20$	5.5	36

