



ALMA MATER STUDIORUM
UNIVERSITÀ DI BOLOGNA

ARCHIVIO ISTITUZIONALE DELLA RICERCA

Alma Mater Studiorum Università di Bologna Archivio istituzionale della ricerca

Shashlik calorimeters: Novel compact prototypes for the ENUBET experiment

This is the final peer-reviewed author's accepted manuscript (postprint) of the following publication:

Published Version:

Shashlik calorimeters: Novel compact prototypes for the ENUBET experiment / Pari M.; Ballerini G.; Berra A.; Boanta R.; Bonesini M.; Brizzolari C.; Brunetti G.; Calviani M.; Carturan S.; Catanesi M.G.; Cecchini S.; Coffani A.; Cindolo F.; Collazuol G.; Conti E.; Dal Corso F.; De Rosa G.; Delogu C.; Gola A.; Intonti R.A.; Jollet C.; Kudenko Y.; Laveder M.; Longhin A.; Loverre P.F.; Ludovici L.; Magaletti L.; Mandrioli G.; Margotti A.; Mascagna V.; Mauri N.; Meregaglia A.; Mezzetto M.; Nessi M.; Paoloni A.; Parozzi E.; Pasqualini L.; Patrascoiu G.; Patrizii L.; Piemonte C.; Pozzato M.; Pupilli F.; Prest M.; Radicioni E.; Riccio C.; Ruggeri A.C.; Sisti G.; Saldani M.; Tenti M.; Todi M.; Terranova F.; Vellozza E.; Vescio M.; Votano L.. - In: NUCLEAR INSTRUMENTS & METHODS IN PHYSICS RESEARCH. SECTION A, ACCELERATORS, SPECTROMETERS, DETECTORS AND ASSOCIATED EQUIPMENT. - ISSN 0168-9002. - STAMPA. - 936:(2019), pp. 148-149.
This version is available at <https://hdl.handle.net/11365/74306> since 2023-03-02.
Documento presentato al convegno IPAC2018 - 14th Pisa Meeting on Advanced Detectors tenutosi a La Biodola, Isola D'Elba (Italy) nel 27th May - 2nd June 2018) [10.1016/j.nima.2018.11.041].

Terms of use:

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).
When citing, please refer to the published version.

(Article begins on next page)

This is the final peer-reviewed accepted manuscript of:

M. Pari, G. Ballerini, A. Berra, R. Boanta, M. Bonesini, C. Brizzolari, G. Brunetti, M. Calviani, S. Carturan, M.G. Catanesi, S. Cecchini, A. Coffani, F. Cindolo, G. Collazuol, E. Conti, F. Dal Corso, G. De Rosa, C. Delogu, A. Gola, R.A. Intonti, C. Jollet, Y. Kudenko, M. Laveder, A. Longhin, P.F. Loverre, L. Ludovici, L. Magaletti, G. Mandrioli, A. Margotti, V. Mascagna, N. Mauri, A. Meregaglia, M. Mezzetto, M. Nessi, A. Paoloni, E. Parozzi, L. Pasqualini, G. Paternoster, L. Patrizii, C. Piemonte, M. Pozzato, F. Pupilli, M. Prest, E. Radicioni, C. Riccio, A.C. Ruggeri, G. Sirri, M. Soldani, M. Tenti, M. Torti, F. Terranova, E. Vallazza, M. Vesco, L. Votano, Shashlik calorimeters: Novel compact prototypes for the ENUBET experiment, Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment, Volume 936, 2019, Pages 148-149.

The final published version is available online at: <https://doi.org/10.1016/j.nima.2018.11.041>.

Rights / License:

The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

Shashlik calorimeters: novel compact prototypes for the ENUBET experiment

M. Pari

Università degli Studi di Padova, Via Marzolo 8, Padova, Italy
INFN Sezione di Padova, Via Marzolo 8, Padova, Italy
CERN, Route de Meyrin 385, Geneva, Switzerland

On behalf of the ENUBET Collaboration:

G. Ballerini, A. Berra, R. Boanta, M. Bonesini, C. Brizzolari,
G. Brunetti, M. Calviani, S. Carturan, M.G. Catanesi,
S. Cecchini, A. Coffani, F. Cindolo, G. Collazuol, E. Conti, F. Dal
Corso, G. De Rosa, C. Delogu, A. Gola, R. A. Intonti, C. Jollet,
Y. Kudenko, M. Laveder, A. Longhin, P.F. Loverre, L. Ludovici,
L. Magaletti, G. Mandrioli, A. Margotti, V. Mascagna, N. Mauri,
A. Meregaglia, M. Mezzetto, M. Nessi, A. Paoloni, E. Parozzi,
L. Pasqualini, G. Paternoster, L. Patrizii, C. Piemonte,
M. Pozzato, F. Pupilli, M. Prest, E. Radicioni, C. Riccio,
A.C. Ruggeri, G. Sirri, M. Soldani, M. Tenti, M. Torti,
F. Terranova, E. Vallazza, M. Vesco

PRESENTED AT

PM2018 - 14th Pisa Meeting on Advanced Detectors
from 27th May to 2nd June 2018, La Biodola, Isola D'Elba (Italy)

Abstract

We summarize in this paper the detector R&D performed in the framework of the ERC ENUBET Project. We discuss in particular the latest results on longitudinally segmented shashlik calorimeters and the first HEP application of polysiloxane-based scintillators.

1 Introduction

The ENUBET project [1, 2] aims to develop a neutrino source based on tagging of large angle positrons from K_{e3} decays (i.e. $K^+ \rightarrow e^+ \pi^0 \nu_e$) in an instrumented decay tunnel. This would lead to a reduction of the systematic uncertainties on the knowledge of the initial neutrino flux to $\sim 1\%$, i.e. one order of magnitude lower than present neutrino beams. This facility would highly impact on accelerator neutrino physics, allowing for an unprecedented precision on the ν_e and $\bar{\nu}_e$ cross section measurement. The decay tunnel to

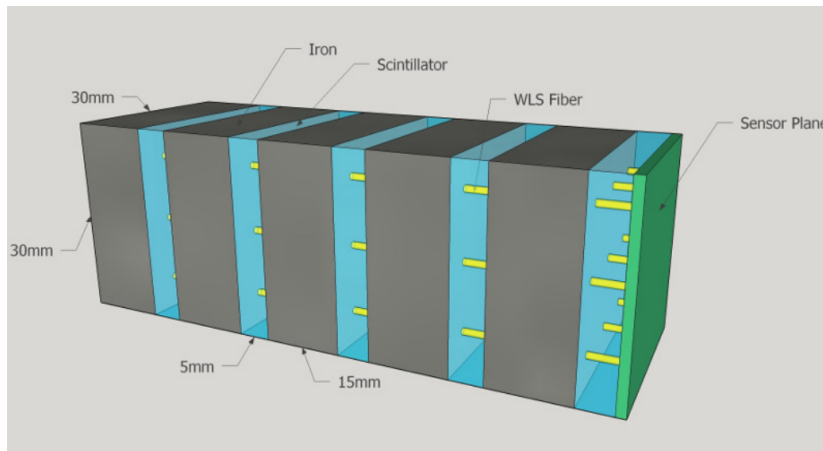


Figure 1: Schematics of a single detector module (UCM: Ultra Compact Module) for ENUBET.

be implemented consists in an hollow cylinder with a length of 40 m and a 1 m radius. Particle transport and interactions in the beamline were simulated with G4beamline [3] while the interactions in the instrumented decay tunnel and the detector response were simulated with GEANT4. The expected rate at the detector (positron tagger) is 200 kHz/cm² and e/π separation at the <3% level is needed to reject the pion background due to beam halo and to other decay modes of kaons. This separation is achieved by means of longitudinally segmented calorimeters. These requirements constrain the detector technology, which must be based on radiation hard components with $O(10\text{ ns})$ recovery time and a $\sim 10\text{ cm}^2$ granularity. Cost effectiveness is a key parameter since the number of modules for the instrumentation of the tunnel is 10^5 .

2 Compact shashlik calorimeters

Shashlik type calorimeters [4], namely scintillator-based sampling calorimeters readout by optical wavelength shifter (WLS) fibers crossing the iron-scintillator tiles, fulfill the cost effectiveness and fast response constraints mentioned above. A pioneering compact solution has been developed in the context of the SCENTT INFN R&D [5, 6], leading to the baseline ENUBET single module prototype, called Ultra Compact Module (UCM). Fig. 1 shows a schematic of the baseline prototype for the ENUBET experiment, composed by 5, 15 mm thick, iron layers interleaved by 5 mm thick plastic scintillator tiles. The length of the module is 10 cm, corresponding to 4.3 radiation lengths (X_0). The UCM has a transverse area of $3 \times 3\text{ cm}^2$, which corresponds to 1.7 Moliere radii. A SiPM-based readout system was integrated directly in the bulk of the detector: every WLS fiber (9 in total) is readout by one single SiPM. The ENUBET SiPMs are produced by FBK with a 1 mm^2 sensitive area and 2500 $20 \times 20\ \mu\text{m}$ cells.

3 Beam tests at CERN-PS T9

A positron tagger prototype has been tested assembling 56 UCMs in a $7 \times 4 \times 2$ structure: in the longitudinal direction 7 UCMs sample the development of the electromagnetic and hadronic showers. The calorimeter ($30.1 X_0$ and 3.09 interaction lengths) was tested at CERN-PS T9 beamline in November 2016 [7]. By selecting electrons through an upstream Cherenkov counter, the resolution of the calorimeter was measured in the 1-5 GeV energy range, i.e. in the range of interest for neutrino physics applications. The results for electrons ($(15.7 \pm 0.7)\%/\sqrt{\text{GeV}}$) and the pattern of energy deposition of pions are in good agreement with the Monte Carlo simulation and confirm the detector specifications of ENUBET. The resolution and e/π discrimination were tested for particles impinging with a tilt angle from 0 to 250 mrad reproducing the conditions envisaged in the ENUBET decay tunnel.

4 Test of SiPM radiation hardness

Since the SiPMs are embedded in the bulk of the UCM, it is crucial to verify that radiation effects do not compromise the performance of the ENUBET calorimeter. Nuclear Counter Effects has been demonstrated to be negligible in [6]. During the lifetime of the experiment the SiPM will integrate a neutron fluence of $O(10^{11})$ 1 MeV-equivalent neutrons/cm². SiPMs are particularly sensitive to neutron damage and a dedicated irradiation campaign at the CN facility at INFN-LNL (Legnaro) was performed in June 2017. Neutron fluences up to 10^{12} n/cm² were integrated by impinging 5 MeV protons from the CN Van de Graaff generator to a thick Beryllium target. From the photodetection characterization of the irradiated SiPMs, we demonstrated that the sensitivity to single photon is lost after an integrated dose of 3×10^9 n/cm² (1 MeV equivalent). UCM prototypes read out by the neutron irradiated SiPM boards were tested at CERN in October 2017 (T9 beamline). The test demonstrated that the calorimetric performance of the detector are not compromised by irradiation in the $O(10^{11})$ n/cm² regime. The energy response of the UCMs to a beam of π^- , e^- and μ^- shows that the ratio between the MIP peak and electron peak remains constant. In particular it is still possible to distinguish the MIP peak from the pedestal after the irradiation. The overall gain reduction of the irradiated boards can be recovered by increasing the overvoltage within the SiPM operational range.

5 Polysiloxane scintillators

As an alternative to standard plastic scintillator, a polysiloxane-based scintillator [8, 9] was employed in the construction of the UCMs. Polysiloxane doped with scintillating material is liquid at high temperature and reaches a soft solid state at room temperature. Polysiloxane-based scintillators ease in a substantial manner the construction of shashlik calorimeters because they can be poured over the fibers without drilling the scintillator. We demonstrated that this system has the same optical coupling to fibers than injection molded plastic scintillators. This material has a radiation hardness ten times larger than standard plastic scintillators and remains transparent up to 10 kGy. It has however

a light yield that is 30% the yield of the best Polyvinyltoluene-based scintillators (e.g. EJ-200). A 12 UCMs prototype, assembled in a $3 \times 2 \times 2$ structure, has been tested during the October 2017 test beam at T9. The polysiloxane-based UCMs had a thickness of 15 mm, i.e. three times the thickness of the baseline prototype to compensate for the reduced light yield of polysiloxane. The energy resolution in the few GeV range is $16\%/\sqrt{\text{GeV}}$ and it is comparable with the prototype based on plastic scintillators.

Acknowledgments

This project has received funding from the European Unions Horizon 2020 Research and Innovation programme under Grant Agreement no. 654168 and no. 681647.

References

- [1] A. Longhin, L. Ludovici et F. Terranova, A Novel Technique for the Measurement of the Electron Neutrino Cross Section, *Eur. Phys. J. C* 75 (2015) 155
- [2] A. Berra, et al. (ENUBET Collaboration), Enabling precise measurements of flux in accelerator neutrino beams: the ENUBET project, CERN-SPSC-2016-036, SPSC-EOI-014
- [3] T. J. Roberts et D. M. Kaplan, G4beamline simulation program for matter-dominated beamlines, 2007 IEEE Particle Accelerator Conference (PAC), Albuquerque, NM, (2007) 3468-3470
- [4] H. Fessler, et al., A Scintillator-Lead Photon Calorimeter Using Optical Fiber Readout Systems, *Nucl. Instrum. Meth A* 240 (1985) 284–288
- [5] A. Berra, et al., A Compact Light Readout System for Longitudinally Segmented Shashlik Calorimeters, *Nucl. Instrum. Meth. A* 830 (2016) 345–354
- [6] A. Berra, et al., Shashlik Calorimeters With Embedded SiPMs for Longitudinal Segmentation, *IEEE Trans. Nucl. Sci.* 64 (2017) 1056–1061
- [7] G. Ballerini, et al. (ENUBET Collaboration), Testbeam performance of a shashlik calorimeter with fine-grained longitudinal segmentation, *JINST* 13 (2018) P01028
- [8] S. Carturan, et al., Novel polysiloxane-based scintillators for neutron detection, *Radiation protection dosimetry*, 2010, 11, 471-6 143
- [9] A. Quaranta, et al., Doped polysiloxane scintillators for thermal neutrons detection, *Journal of Non-Crystalline Solids*, Col. 357, 8-9, 15/04/2011