

Alma Mater Studiorum Università di Bologna
Archivio istituzionale della ricerca

The use of SARAL/AltiKa altimeter measurements for multi-site hydrodynamic model validation and rating curves estimation: An application to Brahmaputra River

This is the final peer-reviewed author's accepted manuscript (postprint) of the following publication:

Published Version:

Dhote P.R., Thakur P.K., Domeneghetti A., Chouksey A., Garg V., Aggarwal S.P., et al. (2021). The use of SARAL/AltiKa altimeter measurements for multi-site hydrodynamic model validation and rating curves estimation: An application to Brahmaputra River. *ADVANCES IN SPACE RESEARCH*, 68(2), 691-702 [10.1016/j.asr.2020.05.012].

Availability:

This version is available at: <https://hdl.handle.net/11585/779253> since: 2020-11-10

Published:

DOI: <http://doi.org/10.1016/j.asr.2020.05.012>

Terms of use:

Some rights reserved. The terms and conditions for the reuse of this version of the manuscript are specified in the publishing policy. For all terms of use and more information see the publisher's website.

This item was downloaded from IRIS Università di Bologna (<https://cris.unibo.it/>).
When citing, please refer to the published version.

(Article begins on next page)

The use of SARAL/AltiKa altimeter measurements for multi-site hydrodynamic model validation and rating curves estimation: an application to Brahmaputra River

Pankaj R. Dhote¹, Praveen K. Thakur¹, Alessio Domeneghetti², Arpit Chouksey¹, Vaibhav Garg, S. P. Aggarwal¹, Prakash Chauhan¹

¹ *Indian Institute of Remote Sensing, ISRO, Dehradun, 248001, India*

² *DICAM, Water Resources, University of Bologna, 40136 Bologna, Italy*

* Correspondence: pankaj.dhote99@gmail.com, pdh@iirs.gov.in

Abstract

Hydrodynamic (HD) modelling in data sparse region represents a challenge due to poor hydrological and topographic data availability. Recently, remote sensing techniques offer additional data that may help to improve the reliability and accuracy of such analysis. In this study, an attempt has been made to investigate the potential and added value of altimeter measurements for multi-site validation of the HD model and constructed rating curves (RCs) in a sparsely gauged Brahmaputra River, India. The HD model (MIKE 11) was developed for a Brahmaputra River stretch of 135 km, between Tezpur and Guwahati, where 4 ground-tracks of the SARAL/AltiKa (the first Ka band altimeter mission) cross the river. The Nash Sutcliffe efficiency (NSE) between HD model based water level and in-situ water level during calibration (January-October 2013) and validation (January-March 2014) was found to be 0.93 and 0.79 respectively. Calibrated and validated HD model was used to simulate water level and build rating curves at virtual stations. The bias correction (7.2 cm to 9.5 cm) was applied to the altimetry measurements before comparison with the modelled water levels. The root mean square error (RMSE) ranging between 15 cm to 42 cm was observed between the modelled and altimetry-derived water level at all the virtual stations, indicating the potential of satellite altimetry for multi-site validation of the HD model (inline with previous studies)

1 and validation of the constructed RCs. The availability of RCs at virtual stations allows the
2 expansion of the gauging network along the Brahmaputra River, thus enabling the estimation
3 of the discharge at additional locations and the potential evaluation of the contributions of
4 lateral tributaries could be evaluated in future work.
5
6
7
8
9

10 **Keywords:** SARAL/AltiKa; satellite altimetry; hydrodynamic modelling; remote sensing;
11 Brahmaputra River; rating curve
12
13
14

15 **1 Introduction**

16
17

18
19 Researchers dealing with flood hazard and risk assessment typically refer to available in-situ
20 gauging stations for the calibration and validation of hydrological and hydrodynamic models.
21 However, the numbers of gauging stations are decreasing since last decades (Vorosmarty et
22 al., 2000) due to the high economical and temporal efforts required for their maintenance.
23 The lack of gauging data such as stage-discharge relationship results in higher uncertainty in
24 hydrological studies. Remote sensing techniques such as satellite altimetry are capable since
25 long time to monitor continental water bodies at regular interval (Birkett et al., 2002).
26 Various altimeter missions (e.g., past missions - ENVISAT, Topex/Poseidon and ERS2,
27 current - Jason-3, SARAL/AltiKa and Sentinel-3) have shown their potential to monitor
28 water levels (WL) of inland waterbodies (see e.g. Dubey et al., 2015, Santos et al., 2014,
29 Papa et al., 2010; Birkett et al., 1998; Birkett et al., 1995). In particular, current
30 SARAL/AltiKa mission with Ka-band allows high bandwidth of 480 MHz and provides
31 vertical resolution of 0.3 m, which is better than previous Ku-band based altimeters having
32 vertical resolution of 0.5m (Bonfond et al. 2018).
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52

53 HD models have been widely used for flood inundation mapping studies (Dhote et al., 2019;
54 Mani et al., 2014; Horrit & Bates, 2001). Once the river geometry and roughness coefficients
55 of the HD model are settled (prevailing uncertainties), perhaps after a calibration phase, the
56
57
58
59
60
61
62
63
64
65

1 reliability of the modelling outcomes depends on the accuracy of the boundary conditions
2 adopted by the model itself, which in turn typically depends on the availability of gauging
3 data (see e.g. Domeneghetti et al., 2012). Extensive work has been done in combining
4 remotely sensed data and HD models for flood inundation mapping and monitoring
5 (Bhattacharya et al.,2019; Domeneghetti et al., 2014; Morales-Hernandez et al., 2013; Wright
6 et al., 2008; Chatterjee et al., 2008), while less emphasis has been put on the use of remote
7 sensing data for multi-site validation of HD model and construction of rating curves.
8

9 Domeneghetti et al., (2014) investigated the application of satellite altimetry data to calibrate
10 the hydraulic model in a well gauged and surveyed river basin. They concluded that, for
11 medium to large rivers, a model implemented by integrating satellite and in-situ data
12 simulates the average streamflow condition better than one based on in-situ data only.
13 Various studies in the literature report examples of calibration and validation of HD models
14 carried using satellite altimetry (Chembolu et al., 2019; Jarihani et al., 2015; Yan et al., 2015;
15 Neal et al., 2012).The first ever application of 2D HD model for central Amazon floodplain
16 was validated using limited gauge observations and altimetry data (Wilson et al., 2007).In the
17 case study of Brahmaputra River basin carried out by Schneider et al., (2017), the CryoSat-2
18 and Envisat altimetry data was used to calibrate the cross-sections extracted from freely
19 available SRTM DEM to achieve best fit with the simulated water level. In case the temporal
20 resolution of the water level retrieved using satellite altimetry is coarse, Michailovsky et al.,
21 (2013) suggested to combine river water levels at virtual gauging stations with the outcomes
22 of a hydrological model (more specific-routing model) in a data assimilation framework.
23 They formulated the routing model in terms of reach storage, which involves few
24 assumptions such as trapezoidal cross-sections and measurement operator to estimate water
25 stored in the reach using altimetry based water level as one of the input. Satellite altimetry
26 data has been used for large scale hydrological-hydrodynamic modelling, such as streamflow
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 forecast in the Amazon basin by assimilating in-situ and ENVISAT satellite data (Paiva et al.,
2 2013) and estimation of average depth of the Ob river in Siberia using water level
3
4 measurements from Topex/POSEIDON altimeter data (Biancamaria et al., 2009). All the
5
6 discussed studies have either used satellite altimetry data independently or assimilated with
7
8 the gauging data to calibrate and/or validate the HD and/or hydrological models.
9
10

11
12 The potential of satellite altimetry for flood forecast systems in transboundary river basins
13
14 has been discussed by previous studies (Biancamaria et al., 2011; Hossain et al., 2014; Chang
15
16 et al., 2019). Biancamaria et al. (2011) investigated the correlation between satellite altimetry
17
18 measurements in the upstream part of the Brahmaputra River (Indian region) and in-situ
19
20 measurements available downstream (Bangladesh) to forecast water elevation anomalies near
21
22 Bangladesh border with lead time of 5 days. Attempts have been made to estimate daily river
23
24 level/discharge using satellite altimetry data, such as altimetry observations in data
25
26 assimilation framework (Tourian et al., 2017), ensemble learning regression (ELQ) using
27
28 satellite altimetry data and a hydrologic model (Kim et al., 2019), and integration of altimeter
29
30 samplings with macroscale hydrological model (Chang et al., 2019) for transboundary rivers.
31
32
33
34
35
36

37
38 Researchers have proposed to estimate discharge at ungauged sites using upstream in situ
39
40 discharge data (Gianfagna et al., 2015, Birkinshaw et al., 2014, Tarpanelli et al., 2013,
41
42 Emerson et al., 2005). The use of different altimeters (e.g., TOPEX-Poseidon, ERS-2, and
43
44 ENVISAT) derived water level and in situ RCs to estimate discharge have demonstrated the
45
46 advantage of using remote sensing data and in situ data for enhancing hydrological studies of
47
48 a basin (Jasinski et al., 2001, Kouraev et al., 2005, Papa et al., 2010, Zakharova et al.,
49
50 2006, Michailovsky et al., 2012, Birkinshaw et al., 2014). Also, hydrographs generated using
51
52 rainfall–runoff models were combined with RCs to derive discharge using altimetry water
53
54 level (Leon et al., 2006; Getirana et al., 2013). Paris et al., (2016) proposed a methodology
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

for curve fitting between modelled discharge and altimetry water level to generate RCs in Amazon basin.

The classical stage-discharge power regression law built upon traditionally observed data has been used to generate RCs over decades for various basins all over the world (Herschy, 1993). The impact of change in flow section on RC can be taken into account in these methods using different fits. However, such methods does not consider various hydraulic factors while constructing the RC, such as change in roughness coefficient, change in downstream control and longitudinal water surface gradient (Di Baldassarre and Montanari, 2009). Another limitation of traditional RC is the extrapolation error, meaning the possible bias introduced when applying the RC for high flows, typically not covered during field measurements. Using HD modelling is an alternative to traditional methods to reduce both construction and extrapolation error of RCs based on few stage-discharge measurements, or the errors associated to hydraulic factors (Mansanarez et al., 2019; Domeneghetti et al., 2012, Lange et al., 2010). Having said that, to obtain consistent results (here RCs) at each river section using HD model, the spatial variability in the channel-floodplain requires careful calibration. Previous studies have shown how the validation of hydrological model with respect to the gauging data at the catchment outlet (single site validation) may not produce adequate results at other hydrometric stations (Bai et al., 2017; Nkiaka et al., 2017). Likewise, similar considerations are valid for the calibration of hydraulic models. Lang et al., 2010 validated the constructed RCs using limited available flood marks (water level). The availability of satellite altimetry data over a river for which HD model is available provides the opportunity for its multi-site validation, as well as the construction and validation of RCs at different locations.

Brahmaputra River is unique in terms of its channel-floodplain relation, transboundary in nature, flora and fauna and lateral bars and islands (Coleman 1969). Floods are recurrent

1 events in Brahmaputra River, which result in loss of life and damage to property (Karmaker
2 et al. 2010; Karmaker and Dutta, 2011). Every year people migrate during monsoon season
3 from floodplain to safest place and come back again in post-monsoon. Thus, discharge
4 measurement plays a vital role in flood management activities. During extreme flood events,
5 direct measurement of discharge is very difficult due to practical constraints such as high
6 flow velocities, partial or complete damage of gauging station. Therefore, exploration of RCs
7 is a basic step for indirect estimation of discharge.
8
9

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
The present study demonstrates the significance of altimeter measurements over implemented
HD model in sparsely gauged river stretch. The specific objectives are: (1) RCs construction
using HD modelling at virtual stations; (2) the use of satellite altimetry data for multi-site
validation of HD model and validation of RCs obtained by means of the numerical
simulations. The HD model simulations produce RC at each cross-section. The reliability of
the constructed RCs for sparsely gauged rivers cannot be tested if we do not have
observations. In this case study, calibrated HD model using in-situ data and the availability of
altimetry data enabled an option to verify the constructed RCs

In this study, we refer to water level retrieved over 4 tracks of SARAL/AltiKa 40Hz
altimeter. HD model was settled for a river stretch of 135 km, from Tezpur to Guwahati,
where 4 tracks of SARAL/AltiKa cross the river. The geographical and hydrological
description of the study area and data used in the study are explained section 2. Section 3
outlines the methodology adopted to derive rating curves using HD model and retrieve water
level using satellite altimetry data. Results corresponding to defined objectives are presented
and discussed in section 4, while conclusions of the work are summarized in section 5.

2 Study area and data

1 The study area is a part of the Brahmaputra River Basin (BRB), as shown in Figure 1. The
2 basin area (471,088 sq. km) shown in the Figure 1 is with respect to the outlet at Dhubri,
3 Assam, India. However, BRB is a transboundary basin that spreads over a drainage area of
4 580,000 sq. km lying in China, Bhutan, India and Bangladesh (India-WRIS, 2016).
5 Brahmaputra River originates in the Kailash ranges of Himalayas at an elevation of 5,150 m
6 (just South of the lake called Konggyu Tsho) and flows for about 2900 km, 916 km on which
7 in India. It consists of a network of multiple channels separated by small or sometimes
8 temporary islands, which identify it as braided river. World's highest average annual rainfall
9 occurs in BRB at Cherrapunji-Mawphlang-Pynursla belt in the order of 11,000 mm. 85 % of
10 the precipitation occurs during monsoon months, from May to October. The river is
11 characterised by highly vulnerable islands, river banks, mobile beds and fine sedimentary
12 environment. Every year the river runs with highest streamflow during monsoon season, from
13 July to September, while low flow occurs during January to March. Average annual peak
14 discharge value at Guwahati (Pandu) gauging station is 38,876 m³/s (Dubey et al. 2015).
15 55.48 % of the basin is covered with forest and 5.79 % by water bodies (India-WRIS,
16 2016).Near real time mapping and monitoring of high flow events, drainage congestion and
17 erosion are the major problems in the basin.

18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42 Figure 1. Overview of study area and modelled river reach
43
44

45 SARAL/AltiKa mission launched in February 2013, carries Ka band (35 Hz) altimeter and
46 enhanced bandwidth (480 MHz). It is a joint venture between ISRO (Indian Space Research
47 Organisation, India) and CNES (National Centre for Space Studies, France) and co-operation
48 of scientists from both organisations allowing to explore potential of Ka band altimeter data.
49 Primary objective of the mission is oceanography, climate and coastal region research studies
50 while secondary is to monitor ice sheet, sea ice and inland water bodies (Bonfond et al.,
51 2018). In this study we used SARAL/AltiKa data (orbital repetivity – 35 days) of 04 tracks
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 over Brahmaputra River for the period that goes from March 2013 to July 2016. Starting from
2 July 2016 the satellite orbit has been changed to a drifting mode and thus it is no longer
3 possible to have SARAL/AltiKa time series at the studied ground tracks (Bonnetfond et al.
4 2018).
5
6
7
8
9

10 Daily in-situ water level and discharge series from January 2013 to May 2014 were procured
11 from Inland Waterways Authority of India (IWAI) at two gauging stations (i.e. Tezpur and
12 Guwahati). The surveyed river cross-sections of the Brahmaputra River at an interval of 2100
13 m (approximately) from Tezpur to Guwahati were also procured from the IWAI, Guwahati.
14
15
16
17
18
19
20

21 ALOS PALSAR Digital Elevation Model (DEM) with horizontal resolution of 12.5 m was
22 downloaded from Alaska Satellite Facility (Dataset, 2017). ALOS PALSAR DEM (released
23 in 2014) is a radiometrically terrain-corrected (RTC) product generated from Shuttle Radar
24 Topography Mission (SRTM) GL1 data at 30 m resolution (Accuracy: Horizontal circular
25 error at 90th percentile (CE90) 20 m; Vertical linear error at 90th percentile (LE90) 16m).
26
27
28
29
30
31
32

33 Land use land cover (LULC) map with 1:250000 scale was provided by Indian Space
34 Research Organisation- International Geosphere Biosphere Programme (ISRO IGBP
35 Programme: NRSC, 2006).
36
37
38
39
40

41 **3 Methodology**

42 The methodology adopted in the present study is illustrated in Figure 2. It consists of two
43 major parts. The first part focuses on all the steps involved in setting up the HD model to
44 simulate water level and rating curves at virtual stations falling within the modelled river
45 reach. The second part deals with the water level retrieval using satellite altimetry data for
46 multi-site validation of the HD model and validation of the rating curves. Details of each
47 component are provided in following sub-sections.
48
49
50
51
52
53
54
55
56
57
58
59

60 Figure 2. Overall methodology adopted in the study
61
62
63
64
65

3.1 HD model setup to construct RCs at virtual stations

MIKE 11 HD model solving 1D Saint Venant Equations in fully dynamic mode has been used to simulate water level for a Brahmaputra river (DHI, 2014a). Freely available synthetic aperture radar based ALOS PALSAR DEM (Dataset, 2017) was used for hydro-processing in ArcGIS tool 10.1 to delineate river network and sub-basins of BRB (ESRI, 2012).

It can be seen from Figure 3 that four tracks of Saral/AltiKa (896, 165, 623, and 352) crosses the river between Tezpur and Guwahati. Points of intersection where altimeter ground-tracks cross the river channel are pointed out as virtual stations (Frappart et al. 2005, Leon et al. 2006).

There are 4 right bank tributaries (RT1, RT2, RT3, and RT4) and 01 left bank (LT1) tributary contributing to the main Brahmaputra River flowing from Tezpur to Guwahati. The HD model setup was done for the main Brahmaputra River (Tezpur to Guwahati), while contributions of the tributaries were considered as lateral inflows during simulation.

Figure 3. Brahmaputra River reach simulated with the HD model and SARAL/AltiKa tracks crossing the river

To increase the density of the river cross-sections so that curvature of the river is not comprised, additional cross-sections were extracted from the RTC product of the ALOS PALSAR (i.e., DEM at an interval of 500 m using MIKE HYDRO tool) (DHI, 2014b). Care was taken so that cross-sections were long enough to account for floodplain and channel. The floodplain topography can be well represented using spaceborne DEM, however, depicting bathymetry is quite difficult. Thus, nearest surveyed data was used to edit the DEM-based cross-sections to maintain the conveyance. Few extracted cross-sections not following the downslope topography from upstream to downstream were excluded. Finally, hybrid cross-

1 sections were used in the HD model. The longitudinal profile of the main channel from
2 Tezpur to Guwahati and the cross-section at 23000 m chainage is shown in Figure 4.
3

4
5
6
7
8
9 Figure 4. (a) Hybrid cross section at 23000 m chainage (b) Longitudinal profile of the main
10 channel
11

12
13
14 Boundary conditions are needed to close the system of equations to be solved by the double
15 sweep method (Abbot and Ionescu, 1967). Hydrometric data (water level/discharge) at all
16 upstream boundaries and water level, discharge or relationship between water level and
17 discharge (e.g. a rating curve) at the downstream boundary are required as boundary
18 condition. In this study, a water level time series was imposed as boundary condition at
19 upstream end (Tezpur), while rating curve is used at the downstream end (Guwahati).
20
21 Contributions of tributaries were given in terms of discharge time series and considered in the
22 model as point sources. Details of boundary conditions type are given Table 1. Hydrometric
23 data acquired from IWAI was available only at the two gauging stations (i.e. Tezpur and
24 Guwahati), while data for tributaries was estimated using drainage-area ratio method
25 (Emerson et al. 2005). The drainage area ratio of the each tributary (Figure 3) was estimated
26 by dividing the drainage area of respective tributary by the drainage area of BRB with outlet
27 at Guwahati (414501.07 sq. km). The contribution of each tributary as lateral flow is given in
28 Table 2.
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48

49 Before setting up the boundary conditions configuration, we analysed the ratio of “difference
50 between Guwahati and Tezpur discharges to the Guwahati discharge” in terms of percentage.
51
52 It was found that the estimated ratio (i.e. the contribution of tributaries) was less than + 9 %
53 for a period Jan-April 2013 and Nov-Dec 2013. High variation was observed for a period
54 May-Oct, 2013 ranging from +10 % to – 30% (few points more than - 30%) indicating
55
56
57
58
59
60
61
62
63
64
65

1 Guwahati discharge less than Tezpur. The negative ratio may be due to the lateral
2 propagation of the flood wave between Tezpur and Guwahati (being braided river; see Fig. 3)
3
4 and error in rating curve used to estimate water level. The contribution of tributaries cannot
5
6 be negative. However, the difference between water level time series was ranging from 17.5
7
8 to 20.5 m having good trend ($R^2 = 0.65$). Thus, we move ahead with water level time series
9
10 as boundary condition for upstream end i.e. Tezpur. The contribution of tributaries (6.65 %)
11
12 was estimated using drainage area ratio method considering discharge at Guwahati station
13
14 only.
15
16
17
18
19

20 Table 1. Summary of boundary conditions
21

22 Table 2. Contribution of the tributaries
23
24

25
26 The Manning's roughness coefficient (n , $m^{-1/3}s$) is one of the most important parameter in HD
27
28 modelling since it controls energy losses at every river station. For this study we built a
29
30 lookup table that relates different LULC classes with n values. LULC classes were identified
31
32 using ISRO IGBPLULC map and Google Earth high resolution imageries (Google Earth,
33
34 2018). Manning's n values were selected based on the literature and previous relevant studies
35
36 (Bhattacharya et al 2019; Timbadiya1 et al 2015; Woldemichael et al. 2010; Chow 1959).
37
38 The initial Manning's n values used for channel, settlement area, forest, agriculture area were
39
40 0.03, 0.2, 0.1 and 0.04 $m^{-1/3} s$, respectively.
41
42
43
44
45

46 Finally, we referred to the calibrated and validated HD model (using in-situ data; explained in
47
48 section 4.1) to generate water level time series and RC's at virtual stations.
49
50

51 **3.2 Water level retrieval using satellite altimetry data** 52

53
54 Satellite altimetry is a technique for measuring the height of a target surface. Altimetry
55
56 measures the time interval between transmitted radar pulses from satellite antenna to the
57
58 target surface and back to the satellite receiver. Combination of estimated time with the
59
60
61
62

1 precise location of satellite gives height of the surface with respect to reference ellipsoid.
2 Footprint of altimeter extends till several kilometres, thus creating multi-peak and complex
3 waveform over large rivers, such as Brahmaputra, due to varying LULC, slopes and sand
4 bars. These circumstances limit the application of the algorithms developed for waveforms
5 over ocean. Saying that, return power received from water surface within altimeter footprint
6 remains higher as compared to other features due to surface characteristics.
7

8
9
10
11
12
13
14
15 Virtual stations were identified based on SARAL/AltiKa tracks over Brahmaputra River.
16 Focus was given to the tracks (896,165, 623, 352) passing over modelled river reach.
17 Waveforms were extracted over virtual stations for 40 Hz waveform data of SARAL/AltiKa
18 using Broadview Radar Altimetry Toolbox (BRAT, 2017). Retracking algorithm was applied
19 to retrieve water level as leading edge of target return waveform deviates from on-board
20 altimeter tracking gate (ESA & CNES, 2018). In this study, we used ‘Off center of gravity
21 retracker (ice-1)’ retracking algorithm to retrieve water level (Wingham et al. 1986). The
22 advantage of this algorithm is that if the return power of leading and trailing edge is in the
23 analysis window, it can compute the midpoint of the leading edge for every waveform
24 (Dubey, 2015).
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39

40 Water level retrieved using altimeter data requires number of range and geophysical
41 corrections to account for time delay of microwave pulses due to atmospheric effects, such as
42 dry tropospheric correction, wet tropospheric correction, ionospheric correction and
43 correction for pole and solid tidal effects on the Earth (Chelton et al. ,2001;Wahr,1985;
44 Cartwright and Edden,1973). To estimate the water level, first of all we need the altitude of
45 satellite orbit (Alt) and altimeter range value (R). Later, we apply geophysical and
46 atmospheric corrections on retracked range values. The orthometric height (here, water
47 surface elevation) is obtained by subtracting mean seas surface elevation with respect to
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 reference ellipsoid WGS 84 ellipsoid (equation 1). Thus, it has to be noted that satellite
2 altimetry water level records in this study are referenced to EGM 96 geoid.
3
4

$$5 \quad H = \text{Alt} - R - [D_{tc} + W_{tc} + I_{onc} + S_{tc} + P_{tc}] - \text{MSS}_{ht} \quad (1)$$

6
7
8
9 Where H: corrected orthometric height; Alt: the satellite altitude from reference ellipsoid; R:
10 the satellite range; D_{tc} : the dry tropospheric correction; W_{tc} : the wet tropospheric
11 correction; I_{onc} : the ionospheric correction; S_{tc} : the solid tide; P_{tc} : the pole tide correction;
12 and MSS_{ht} : the mean sea surface from the reference ellipsoid.
13
14
15
16
17
18
19
20
21
22
23

24 Water level time series retrieved at the four virtual stations located between Tezpur and
25 Guwahati were used for multi-site validation of the HD model, as well as for the validation of
26 the RCs constructed with the model at the virtual stations.
27
28
29
30
31

32 **4 Results and Discussion**

33 Results and discussion section is divided into two parts: (1) Calibration and validation of HD
34 model; (2) Significance of altimeter based water level and hydrodynamic model simulations;
35 results of these activities are presented and discussed.
36
37
38
39
40
41
42

43 ***4.1 Calibration and validation of HD model***

44 The HD model was calibrated for the period that goes from 1st January 2013 to 10th October
45 2013 (daily data) and validated for the time span going from 1st January 2014 to 6th March
46 2014 using water level data procured from IWAI, Guwahati. Manning's coefficient (n)
47 controls the resistance of various LULC classes in the study domain, while cross-sections
48 geometry controls the conveyance impacting the estimation of discharge and water level. To
49 calibrate the HD model n was considered as the only parameter. Being the modelled river
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 stretch very long and to make the calibration process trackable, n values of the different
2 classes (settlement area, forest, agriculture area) falling in floodplain were kept constant. The
3
4 channel n value was varied between the range $0.02-0.05 \text{ m}^{-1/3} \text{ s}$ until we observed a good
5
6 match between simulated and observed water level at Guwahati (Subramanya, 2014; Horrit &
7
8 Bates, 2002; Chow, 1959). The Nash Sutcliffe Efficiency (NSE) and Root Mean Square Error
9
10 (RMSE) were the statistical indexes considered for performance evaluation during calibration
11
12 and validation phases.
13
14
15

16
17 The optimal Manning's n value for the river channel was found to be $0.04 \text{ m}^{-1/3} \text{ s}$ (after
18
19 datum correction of 2.8 m applied to observed water), for which the best agreement between
20
21 simulated and observed water level was observed. The simulated water level is referenced to
22
23 EGM96 geoid, while in-situ water level is reference to local datum i.e. mean sea level of
24
25 India. The datum correction applied to the in-situ data in the present study is in agreement
26
27 with the datum correction at Guwahati (3.09 m), as suggested by Dubey et al.(2014) based on
28
29 the average deviation between in-situ and altimetry-derived water level records over a period
30
31 of 10 years.
32
33
34
35
36

37
38 Figure 5 shows that there is a good match between simulated and observed water level during
39
40 calibration (NSE 0.93; RMSE 0.31 m) and validation (NSE 0.79; RMSE 0.1 m).
41
42 Woldemichael et al.(2010) investigated the role of Manning's roughness coefficient for the
43
44 estimation of discharge in Brahmaputra River (Bangladesh region). They found that
45
46 Manning's n of $0.04 \text{ m}^{-1/3} \text{ s}$ gave accurate estimates of discharge, confirming the calibration
47
48 performed in this study. A value of $0.04 \text{ m}^{-1/3} \text{ s}$ might appear too high for the silty sand of the
49
50 Brahmaputra River, however, this may be due to the limitation in representing the braided
51
52 channel geometry. The calculation of the hydraulic information (i.e., wetted area and
53
54 perimeter, hydraulic radius, etc.) of multiple channels in braided river depends on how
55
56 carefully channel-floodplain sub-sections have been provided as input data compared to the
57
58
59
60
61
62
63
64
65

1 actual flow data. These difficulties prevail while tuning the calibration parameter and can
2 affect model output.
3

4
5 Figure 5. Calibration and validation of the HD model at Guwahati station
6

7 8 **4.2 Significance of altimeter based water level and hydrodynamic model simulations** 9

10
11 Number of SARAL/AltiKa tracks passing over Brahmaputra River provides an opportunity to
12 study the water level dynamics at finer intervals in addition to the existing gauging stations.
13
14 Single value of water level was chosen among group of values that fall within the main
15
16 channel along the track.
17
18
19

20
21
22 Rating curves were built at the virtual stations using HD modelling (Figure 6). Later,
23
24 simulated water levels at virtual stations were compared with those retrieved from the
25
26 altimeter. Statistics showed good correlation with NSE of 0.98 and RMSE of 0.15 m for track
27
28 352 near Kania Tapu (Figure 7). Statistics of the comparison between satellite altimetry and
29
30 simulated water levels for all the virtual stations are given in Table 3. However, bias
31
32 correction was applied to the altimetry derived water levels records ranging between 0.72 to
33
34 0.95 m before comparing with the modelled water levels.
35
36
37
38

39
40 The HD model was found to be stable in accordance with altimeter-based water levels. As the
41
42 HD model was already calibrated using in-situ data at Guwahati (section 4.1), the comparison
43
44 at virtual station not only leads to the multi-site validation of the HD model but also
45
46 validation of the RCs obtained with it. To assess the extreme flood event discharge,
47
48 validation of rating curves plays an important role. Lange et al., 2010 validated the HD model
49
50 based rating curves using limited flood marks, while satellite altimetry provides spatio-
51
52 temporal water level records at regular intervals.
53
54
55

56
57 The HD model simulations produce RC at each cross-section. The reliability of the
58
59 constructed RCs for sparsely gauged rivers cannot be tested if we do not have observations.
60
61
62

1 In this case study, calibrated HD model using in-situ data and the availability of altimetry
2 data enabled an option to verify the constructed RCs. It has to be noted that a merely
3 comparison of water levels does not give us the certainty that the estimated RCs are valid.
4 However, if the model is calibrated (meaning that it reproduces the discharge correctly at the
5 gauging stations) and the water levels simulated at the virtual stations are in line with satellite
6 observations, we can reasonably assume that discharge-water relationships can be somehow
7 reproduced by the model itself, and thus have some trust on the estimated RCs.
8

9 The construction of RCs at virtual stations allows expanding gauging network along the river.
10 As there is synergy between altimetry and HD model simulated water level, RCs can be used
11 to estimate the discharge at virtual stations and to estimate the contribution of different lateral
12 tributaries along the main river.
13

14 RC is a cost effective and quick tool to estimate discharge using water level data. Rigorous
15 studies have been carried out to extrapolate rating curves using curve fitted to the water level
16 and discharge time series (Paris et al., 2016; Dubey et al., 2014). Inconsistencies can be
17 observed during estimation of discharge using power model based rating curves for extreme
18 flood events beyond exploited hydrometric data. However, HD model framework can address
19 such extreme flood events by taking into account the hydraulic information around the
20 gauging station. More literature can be found on extrapolation of rating curves using HD
21 modelling and related uncertainties (Di Baldassare & Montanari, 2009; Reitan & Petersen-
22 Overleir, 2009; Naulet et al., 2005).
23

24 Figure 6. Rating curves generated at virtual stations by means of the HD model run over the
25 period from 1st January 2013 to 10th October 2013
26

27 Figure 7. Comparison of the water level provided by the altimeter and the HD model (Track
28

5 Limitations of the study

The proposed study consists of certain limitations based on the availability and accuracy of the data and study domain. The 1D numerical scheme was applied to the braided Brahmaputra River and floodplains by extending channel cross-sections. Assuming one dimensionality of the flow limits lateral propagation, which is very important especially in braided rivers. The contribution of the tributaries was estimated using drainage-area ratio method. Reliability of discharge estimation using RC depends on the accuracy of surveyed river data and DEM used for river cross-sections, as well as on their capability to monitor the geomorphological evolution of the area (i.e., topographic data need to be updated in time). The application of 2D or 1D-2D coupled model using denser surveyed river cross-sections can be a future study.

The selection of the altimeter dataset (SARAL/AltiKa) was done based on the location of the altimeter measurements that fall within the available hydrometric and topographic data. The same methodology can be explored considering Jason 3 and Sentinel 3 data, as well as those of the upcoming SWOT mission (Biancamaria et al., 2016).

6 Conclusions

This study investigates the advantages of altimeter measurements in combination with HD model in a sparsely gauged river stretch of the Brahmaputra River, India. Water level series was retrieved at 4 tracks of SARAL/AltiKa along the river stretch included within the two gauging stations at Tezpur and Guwahati.

The study combined HD model with satellite derived water levels showing the potential of those latter to enable a multi-site validation of the numerical model, as well as the construction of additional RCs. The RCs produced at virtual stations allows the expansion of the gauging network along the Brahmaputra River and the estimation of the discharge at these

1 locations, which may imply the possibility to infer the contribution of the several tributaries
2 that flow into the main river.
3

4
5 **Acknowledgments:** Authors would like to thank Inland Waterways Authority of India
6 (IWAI, Guwahati) for providing topographic and hydrometric data. We are grateful to Alaska
7 Satellite Facility (ASF), Aviso data portal and Environmental Systems Research Institute
8 (ESRI) for providing topographic data, altimeter data and high resolution base maps
9 respectively. This work is partially funded by Indian Space Research Organization (ISRO),
10 India, under Technology Development Programme (TDP) project “Flood-prone Areas
11 Identification and Flood Risk Assessment using Integrated Process based Modelling and
12 Geospatial Techniques”.
13
14
15
16
17
18
19
20
21
22
23
24

25 **References**

- 26
27
28
29 • Abbott, M.B., Ionescu, F., 1967. The Numerical Computation of Nearly Horizontal
30 Flows, *Journal of Hydraulic Research*, 5:2, 97-117, doi:
31 10.1080/00221686709500195.
32
33
34
35
- 36 • Bai, J., Shen, Z. & Yan, T., 2017. A comparison of single- and multi-site calibration
37 and validation: a case study of SWAT in the Miyun Reservoir watershed, China.
38 *Front. Earth Sci.* 11, 592–600.
39
40
41
- 42 • Bhattacharya, B., Mazzoleni, M., and Ugay, R., 2019. Flood inundation mapping of
43 the sparsely gauged large-scale Brahmaputra basin using remote sensing products.
44 *Remote Sensing*, 11 (5).
45
46
47
48
- 49 • Biancamaria, S., Bates, P.D., Boone, A., and Mognard, N.M., 2009. Large-scale
50 coupled hydrologic and hydraulic modelling of the Ob river in Siberia. *Journal of*
51 *Hydrology*, 379 (1–2), 136–150.
52
53
54
55
56
57
58
59
60
61
62
63
64
65

- 1 • Biancamaria, S., Hossain, F., Lettenmaier, D. P., 2011. Forecasting transboundary
2 river water elevations from space. *Geophysical Research Letters*, 38, L11401,
3
4 doi:10.1029/2011GL047290
5
- 6 • Birkett, C. M., Mertes, L. A. K., Dunne, T., Costa, M. H., Jasinski, M. J., 2002.
7 Surface water dynamics in the Amazon Basin: Application of satellite radar
8
9 altimetry, *J. Geophys. Res.*, 107(D20), 8059, doi:10.1029/2001JD000609.
10
11
- 12 • Birkett, C.M., 1998. Contribution of the TOPEX NASA radar altimeter to the global
13 monitoring of large rivers and wetlands. *Water Resources Research*, 34, 1223-1239,
14
15 doi:10.1029/98WR00124.
16
17
- 18 • Birkett, C. M., 1995. The contribution of TOPEX/POSEIDON to the global
19 monitoring of climatically sensitive lakes. *Journal of Geophysical Research: Oceans*,
20
21 100, 25179-25204, doi:10.1029/95JC02125.
22
23
- 24 • Birkinshaw, S. J., Moore, P., Kilsby, C., O'Donnell, G.M., Hardy, A., Berry, P.A.M.,
25 2014. Daily discharge estimation at ungauged river sites using remote sensing,
26
27 *Hydrol. Processes*, 28(3), 1043–1054.
28
29
- 30 • Bonnefond, P., Verron, J., Aublanc, J., Babu, K.N., Bergé-Nguyen, M., Cancet, M.,
31 Chaudhary, A., Crétaux, J.F., Frappart, F., Haines B.J., Laurain, O., Ollivier, A.,
32
33 Poisson, J.C., Prandi, P., Sharma, R., Thibaut, P., Watson, C., 2018. The Benefits of
34 the Ka-Band as Evidenced from the SARAL/AltiKa Altimetric Mission: Quality
35
36 Assessment and Unique Characteristics of AltiKa Data. *Remote Sensing*, 10(1):83.
37
38
- 39 • BRAT. Broadview Radar Altimetry Toolbox. 2017. *Software User Manual*,
40
41 European Space Agency, Paris, France.
42
43
- 44 • Cartwright, D. E., Edden, A.C., 1973. Corrected tables of tidal harmonics.
45
46 *Geophysical Journal International*, 33(3):253–264.
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

- 1 • Chang, C.-H., Lee, H., Hossain, F., Basnayake, S., Jayasinghe, S., Chishtie, F., Saah,
2 D., Yu, H., Sothea, K., Bui, D.D., 2019. A model-aided satellite altimetry based flood
3 forecasting system for Mekong River, *Environmental Modelling & Software*, 112,
4 112-127, 2019
- 5 • Chatterjee, C., Forster, S., Bronstert, A., 2008. Comparison of hydrodynamic models
6 of different complexities to model floods with emergency storage areas. *Hydrol.*
7 *Processes*, 22, 4695–4709.
- 8 • Chelton, D. B., Ries, J.C., Haines, B.J., Fu, L.L., Callahan, P.S., 2001. Satellite
9 altimetry. In *Satellite Altimetry and Earth Sciences*, Fu, L.-L. and Cazenave, A.
10 (eds.), San Diego, CA: *Academic*, pp. 1–131.
- 11 • Chembolu, V., Dubey, A.K., Gupta, P.K., (2019). Application of satellite altimetry in
12 understanding river–wetland flow interactions of Kosiriver. *J Earth SystSci*, 128: 89.
13 <https://doi.org/10.1007/s12040-019-1099-4>
- 14 • Chow, V.T., Maidment, D.R., Mays, L.W., 1988. *Surface Water. In Applied*
15 *Hydrology*, 1st ed., McGraw-Hill Science: Columbus, OH, USA, 127–166.
- 16 • Coleman, J. M., 1969. Brahmaputra River: Channel processes and sedimentation.
17 *Sedimentary Geology*, 3(2), 129–239.
- 18 • Dataset JAXA/METI ALOS PALSAR L1.0 2007. Accessed through ASF DAAC
19 <https://vertex.daac.asf.alaska.edu/> (accessed on 10 February 2018).
- 20 • DHI, 2014a. *MIKE11 modelling system for Rivers and Channels: Reference Manual*,
21 Danish Hydraulic Institute, Horsholm, Denmark.
- 22 • DHI, 2014b. *MIKE HYDRO User Guide*, Danish Hydraulic Institute, Horsholm,
23 Denmark.
- 24 • Dhote, P.R., Aggarwal, S.P., Thakur, P.K., Garg, V., 2019. Flood inundation
25 prediction for extreme flood events: a case study of Tirthan River, North West
26 Himalaya. *Himalayan Geology*, 40(2), 128-140.

- 1 • Di Baldassare, G. and Montanari, A. 2009. Uncertainty in river discharge
2 observations: a quantitative analysis. *Hydrol. Earth System Sci.*, 13: 913–921.
3
- 4 • Domeneghetti A., Castellarin A., Brath A. Assessing rating-curve uncertainty and its
5 effects on hydraulic model calibration. *Hydrol. Earth Syst. Sci.*, 16, 1191-1202, 2012;
6 www.hydrol-earth-syst-sci.net/16/1191/2012/; doi:10.5194/hess-16-1191-2012.
7
- 8 • Domeneghetti, A., Tarpanelli, A., Brocca, L., Barbetta, S., Moramarco, T.,
9 Castellarin, A., and Brath, A., 2014. The use of remote sensing-derived water surface
10 data for hydraulic model calibration. *Remote Sensing of Environment*, 149, 130–141.
11
- 12 • Dubey, A.Y., Gupta, P., Dutta, S., Kumar B., 2014. Evaluation of satellite-altimetry-
13 derived river stage variation for the braided Brahmaputra River, *International*
14 *Journal of Remote Sensing*, Vol. 35, No. 23, 7815–7827.
15
- 16 • Dubey, A.Y., Gupta, P., Dutta, S., Singh, R.P., 2015. Water Level Retrieval Using
17 SARAL/AltiKa Observations in the Braided Brahmaputra River, Eastern India,
18 *Marine Geodesy*, 38:sup1, 549-567, DOI:10.1080/01490419.2015.1008156.
19
- 20 • Emerson, D.G., Vecchia, A.V., Dahl, A.L., 2005. Evaluation of drainage-area ratio
21 method used to estimate stream flow for the Red River of the North Basin, North
22 Dakota and Minnesota. U.S. Department of the Interior U.S. Geological Survey. In:
23 Cooperation with the Bureau of Reclamation *Scientific Investigations Report* 2005-
24 5017.
25
- 26 • ESA & CNES, 2018. Radar Altimetry Tutorial and Toolbox,
27 <http://www.altimetry.info/> (accessed on 05 February 2018)
28
- 29 • Environmental System Research Institute (ESRI), 2012. ArcGIS 10.1, Redlands:
30 ESRI.
31

- 1 • Frappart, F., Seyler, F., Martinez, J.M., Leon, J.G., Cazenave, A., 2005. Floodplain
2 water storage in the Negro River basin estimated from microwave remote sensing of
3 inundation area and water levels. *Remote Sensing of Environment*, 99(4):387–399.
4
- 5 • Getirana, A. C. V., Peters-Lidard, C., 2013. Water discharge estimates from large
6 radar altimetry data sets in the Amazon basin, *Hydrol. Earth Syst. Sci. Discuss.*, 9,
7 7591–7611, doi:10.5194/hessd-9-7591-2013.
8
- 9 • Gianfagna, C.C., Johnson, C.E., Chandler, D.G., Hofmann, C., 2015. Watershed area
10 ratio accurately predicts daily streamflow in nested catchments in the Catskills, New
11 York. *Journal of Hydrology: Regional Studies*, 4, 583–594.
12
- 13 • Google Earth 7.3.1.4507, 2018. Brahmaputra River, Assam, India. Image @ 2018
14 DigitalGlobe.
15
- 16 • Herschy, R. 1993. The stage–discharge relation. *Flow Meas. Instrum.*, 4: 11–15.
17
- 18 • Horritt, M.S., Bates, P.D., 2002. Evaluation of 1D and 2D numerical models for
19 predicting river flood inundation. *Journal of Hydrology*, 268, 87–99.
20
- 21 • Horritt, M.S., Bates, P.D., 2001. Predicting floodplain inundation: raster based
22 modelling versus the finite-element approach. *Hydrological Processes*, 15, 825–842.
23
- 24 • India-WRIS Team, 2018. Water Resources Information System of India.
25 http://www.india-wris.nrsc.gov.in/wrpinfo/index.php?title=Main_Page (accessed on
26 14 March 2018)
27
- 28 • Hossain, F., Siddique-E-Akbor, A. H. M., Yigzaw, W., Shah-Newaz, S. M., Hossain,
29 M., Mazumder, L. C., Ahmed, T., Shum, C. K., Lee, H., Biancamaria, S., Turk F.
30 J., Limaye, A., 2014. Crossing the 'Valley of Death' : Lessons Learned from
31 Implementing an Operational Satellite-Based Flood Forecasting System. *Bulletin of*
32 *the American Meteorological Society*, 95, 1201-1207, doi :10.1175/BAMS-D-13-
33 00176.1
34

- 1 • Jarihani, A. A., Callow, J. N., McVicar, T. R., Van Niel, T. G., and Larsen, J. R.,
2 2015. Satellite-derived Digital Elevation Model (DEM) selection, preparation and
3 correction for hydrodynamic modelling in large, low-gradient and data-sparse
4 catchments, *J. Hydrol.*, 524, 489–506, doi:10.1016/j.jhydrol.2015.02.049.
5
6
7
- 8 • Jasinski, M. J., Birkett, C.M., Chinn, S., Costa, M.H., 2001. Feasibility of estimating
9 Amazon river stage and discharge using Topex/Poseidon altimetric data, in Land
10 Surface Hydrology Program, Abstract presented at *NASA/NOAA GAPP and*
11 *Hydrology Principal Investigators Meeting*, Potomac, Md., 30 Apr–May, Global
12 Energy and Water Cycle Experiment
13
14
15
16
17
18
19
20
21
- 22 • Karmaker, T., Dutta, S., 2011. Erodability of fine soil from the composite river bank
23 of Brahmaputra in India. *Hydrological Processes*, 25(1):104–111.
24
25
26
- 27 • Karmaker, T., Ramprasad, Y., Dutta, S., 2010. Sediment transport in an active
28 erodible channel bend of Brahmaputra River. *Sadhana*, 35(6):693–706.
29
30
31
- 32 • Kim, D., Lee, H., Beighley, E., Tshimanga, R.M., 2019. Estimating discharges for
33 poorly gauged river basin using ensemble learning regression with satellite altimetry
34 data and a hydrologic model, *Advances in Space Research*,
35 doi:10.1016/j.asr.2019.08.018
36
37
38
39
40
41
- 42 • Kouraev, A. V., Zakharova, E. A., Samain, O., Mognard, N.M., Cazennave, A.,
43 2005. River discharge from Topex-Poseidon satellite altimetry (1992-2002), *Remote*
44 *Sens. Environ.*, 93, 238–245.
45
46
47
48
- 49 • Leon, J. G., Calmant, S., Seyler, F., Bonnet, M.P., Cauhope, M., Frappart, F.,
50 Filizola, N., 2006. Rating curves and estimation of average water depth at the Upper
51 Negro River based on satellite altimeter data and modelled discharges, *J. Hydrol.*,
52 328(3-4), 481–496.
53
54
55
56
57
58
59
60
61
62
63
64
65

- 1 • Madsen H., 2000. Automatic calibration of a conceptual rainfall-runoff model using
2 multiple objectives. *J. Hydrol.*, 235(3–4), 276–288
3
- 4 • Mani, P., Chatterjee, C., Kumar, R., 2014. Flood hazard assessment with
5 multiparameter approach derived from coupled 1D and 2D hydrodynamic flow
6 model. *Nat Hazards*, 70, 1553–1574.
7
- 8 • Mansanarez, V., Westerberg, I. K., Lam, N., & Lyon, S. W., 2019. Rapid
9 Stage- Discharge Rating Curve Assessment Using Hydraulic Modeling in an
10 Uncertainty Framework. *Water Resources Research*, 55, 9765–9787.
11
- 12 • Michailovsky, C. I., McEnnis, C., Berry, P.A.M., Smith, R., Bauer-Gottwein, P.,
13 2012. River monitoring from satellite radar altimetry in the Zambezi River basin,
14 *Hydrol. Earth Syst. Sci.*, 16, 2181–2192, doi:10.5194/hess-16-2181-2012.
15
- 16 • Michailovsky, C. I., Milzow, C., and Bauer-Gottwein, P., 2013. Assimilation of radar
17 altimetry to a routing model of the Brahmaputra River, *Water Resour.*
18 *Res.*, 49, 4807– 4816, doi:[10.1002/wrcr.20345](https://doi.org/10.1002/wrcr.20345).
19
- 20 • Lang, M., Pobanz, K., Renard, B., Renouf, E., Sauquet, E. 2010. Extrapolation of
21 rating curves by hydraulic modelling, with application to flood frequency analysis,
22 *Hydrological Sciences Journal*, 55:6, 883-898, DOI: 10.1080/02626667.2010.504186
23
- 24 • Morales-Hernandez, M., Garcia-Navarro, P., Burguete, J., Brufau, P., 2013. A
25 conservative strategy to couple 1D and 2D models for shallow water flow simulation.
26 *Computers & Fluids*, 81, 26–44.
27
- 28 • Naulet, R., Lang, M., Ouarda, T., Coeur, D., Bobée, B., Recking, A. and Moussay, D.
29 2005. Flood frequency analysis on the Ardèche River using French documentary
30 sources from the two last centuries. In: Special Issue “Applications of palaeoflood
31 hydrology and historical data in flood risk analysis”. *J. Hydrol.*, 312: 58–78.
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

- 1 • Neal, J., Schumann, G., and Bates, P., 2012. A subgrid channel model for simulating
2 river hydraulics and floodplain inundation over large and data sparse areas, *Water*
3 *Resour. Res.*, 48, W11506, doi:10.1029/2012WR012514.
4
5
6
- 7 • Nkiaka, E., Nawaz, N.R. & Lovett, J.C., 2018. Effect of single and multi-site
8 calibration techniques on hydrological model performance, parameter estimation and
9 predictive uncertainty: a case study in the Logone catchment, Lake Chad basin. *Stoch*
10 *Environ Res Risk Assess* 32, 1665–1682.
11
12
13
14
15
16
- 17 • NRSC ISRO, 2006. National Land Use and Land Cover Mapping using AWiFS
18 *Data, Project Report.*
19
20
21
- 22 • Paiva, R. C. D., Collischonn, W., Bonnet, M.-P., de Gonçalves, L. G. G., Calmant,
23 S., Getirana, A., and Santos da Silva, J., 2013. Assimilating in situ and radar
24 altimetry data into a large-scale hydrologic-hydrodynamic model for streamflow
25 forecast in the Amazon, *Hydrol. Earth Syst. Sci.*, 17, 2929–2946,
26 <https://doi.org/10.5194/hess-17-2929-2013>.
27
28
29
30
31
32
33
- 34 • Papa, F., Durand, F., Rossow, W. B., Rahman, A., Bala S. K., 2010. Satellite
35 altimeter-derived monthly discharge of the Ganga-Brahmaputra River and its
36 seasonal to interannual variations from 1993 to 2008, *J. Geophys. Res.*, 115, C12013,
37 doi:10.1029/2009JC006075.
38
39
40
41
42
43
- 44 • Paris, A., R. D. de Paiva, J. S. da Silva, D. M. Moreira, S. Calmant, P.-A. Garambois,
45 W. Collischonn, M.-P. Bonnet and F. Seyler, 2016. Stage-discharge rating curves
46 based on satellite altimetry and modeled discharge in the Amazon basin. *Water*
47 *Resources Research*, 52, 3787-3814, doi:10.1002/2014WR016618.
48
49
50
51
52
53
- 54 • Reitan, T. and Petersen-Overleir, A. 2009. Bayesian methods for estimating multi-
55 segment discharge rating curves. *Stochast. Environ. Res. Risk Assess.*, 23(5): 627–
56
57
58
59
60
61
62
63
64
65

- 1 • Santos da Silva, J., S., Calmant, F., Seyler, D., Moreira, M., Oliveira, D, Monteiro,
2 A., 2014. Radar Altimetry aids Managing gauge networks, *Water Resour. Manage.*,
3 28(3), 587–603
4
- 5 • Subramanya K., 2014. *Engineering Hydrology*, 4th ed., McGraw Hill: New Delhi,
6 India, 340-378.
7
- 8 • Tarpanelli, A., Barbetta, S., Brocca, L., Moramarco, T., 2013. River discharge
9 estimation by using altimetry data and simplified flood routing modeling, *Remote*
10 *Sens.*, 5(9), 4145–4162.
11
- 12 • Timbadiya, P. V., Patel, P. L., & Porey, P. D., 2015. A 1D–2D Coupled
13 Hydrodynamic Model for River Flood Prediction in a Coastal Urban Floodplain.
14 *Journal of Hydrologic Engineering*, 20(2), 05014017. doi:10.1061/(asce)he.1943-
15 5584.0001029
16
- 17 • Tourian, M.J., Schwatke, C., Sneeuw, N., 2017. River discharge estimation at daily
18 resolution from satellite altimetry over an entire river basin. *Journal of Hydrology*,
19 546, 230-247, <https://doi.org/10.1016/j.jhydrol.2017.01.009>
20
- 21 • Vorosmarty, C. J., Green, P., Salisbury, J. and Lammers, R. B., 2000. Global water
22 resources: Vulnerability from climate change and population growth, *Science*, 289,
23 284–288.
24
- 25 • Wahr, J. M., 1985. Deformation induced by polar motion. *Journal of Geophysical*
26 *Research: Solid Earth (1978–2012)*, 90(B11), 9363–9368.
27
- 28 • Wilson, M., Bates, P., Alsdorf, D., Forsberg, B., Horritt, M., Melack, J., Frappart, F.,
29 and Famiglietti, J., 2007. Modeling large-scale inundation of Amazonian seasonally
30 flooded wetlands, *Geophys. Res. Lett.*, 34, L15404, doi:[10.1029/2007GL030156](https://doi.org/10.1029/2007GL030156).
31
- 32 • Wingham, D. J., Rapley, C.G., Griffiths, H., 1986. New techniques in satellite
33 altimeter tracking systems. In *ESA Proceedings of the 1986 International Geoscience*
34

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

and Remote Sensing Symposium (IGARSS'86) on Remote Sensing: Today's Solutions for Tomorrow's Information Needs. European Space Agency, Special Publication, ESA SP-254(III), pp. 1339–1344.

- Woldemichael, A.T., Degu, A.M., Siddique-E-Akbor, A.H.M., and Hossain, F., 2010. Role of Land-Water Classification and Manning's Roughness Parameter in Space-Borne Estimation of Discharge for Braided Rivers: A Case Study of the Brahmaputra River in Bangladesh. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 3 (3), 395–403.
- Wright, N.G., Villanueva, I., Bates, P.D., Mason, D.C., Wilson, M.D., Pender, G., and Neelz, S., 2008. Case study of the use of remotely sensed data for modeling flood inundation on the River Severn, U.K. *Journal of Hydraulic Engineering*, 134 (5), 533–540.
- Yan, K., Tarpanelli, A., Balint, G., Moramarco, T., & Di Baldassarre, G. (2015). Exploring the Potential of SRTM Topography and Radar Altimetry to Support Flood Propagation Modeling: Danube Case Study. *Journal of Hydrologic Engineering*, 20(2). [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0001018](https://doi.org/10.1061/(ASCE)HE.1943-5584.0001018) Zakharova, E. A., Kouraev, A. V., Cazenave, A., Seyler, F., 2006. Amazon River discharge estimated from Topex/Poseidon altimetry, *C. R. Geosci.*, 338(3), 188–196.

Tables

Table 1. Summary of boundary conditions

Location	Boundary Conditions Type	Data
Tezpur (u/s)	Open	Water Level
Tributaries	Point Source	Water Level
Guwahati (d/s)	Rating curve	Water Level-Discharge

Table 2. Contribution of the tributaries

Tributary	Catchment area (sq. km)	Contribution in % using drainage-area ratio method
RT1	1307.33	0.32
RT2	2640.97	0.64
RT3	1618.78	0.39
RT4	266.43	0.06
LT1	21740.11	5.24

Table 3. Statistics of the comparison between satellite altimetry water level and modelled water level

Virtual Stations	RMSE (m)	NSE	Bias Correction (m)
Track 352	0.15	0.98	0.72
Track 623	0.42	0.89	0.95
Track 165	0.36	0.92	0.78
Track 896	0.27	0.94	0.83

Figures

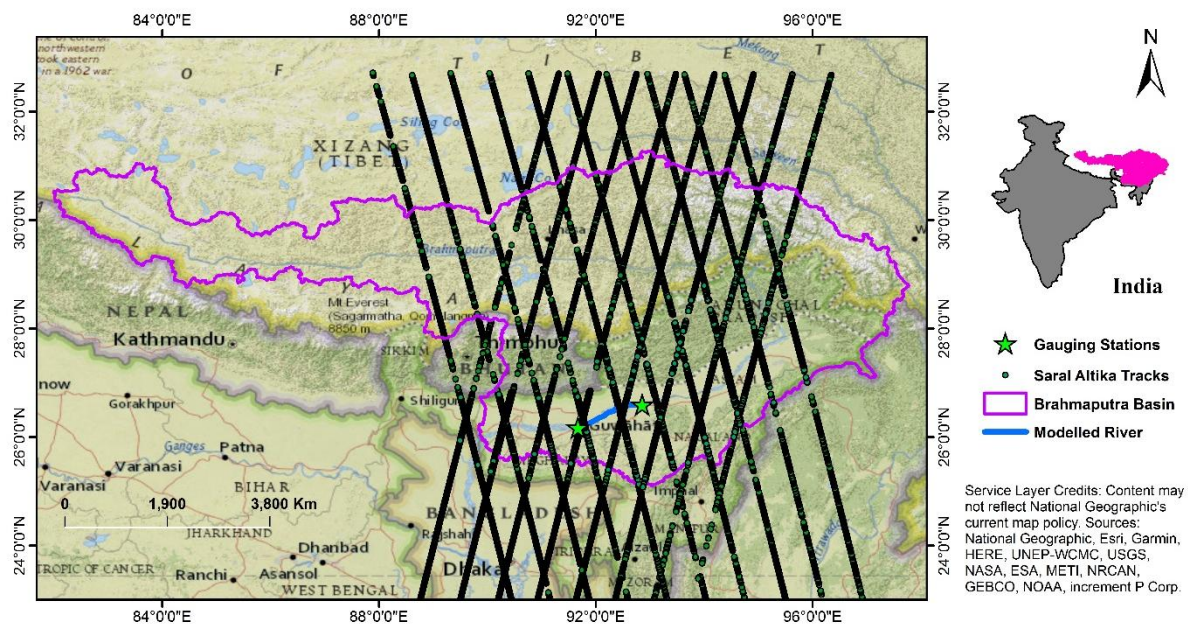


Figure 1. Overview of study area and modelled river reach

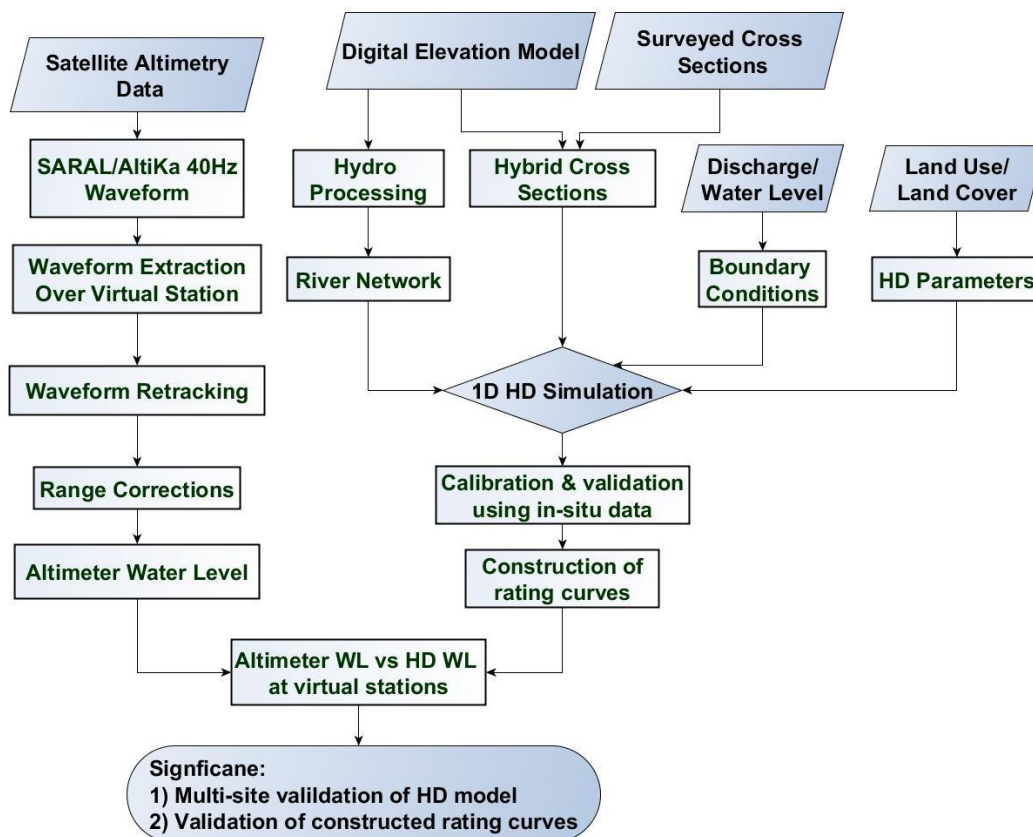


Figure 2. Overall methodology adopted in the study

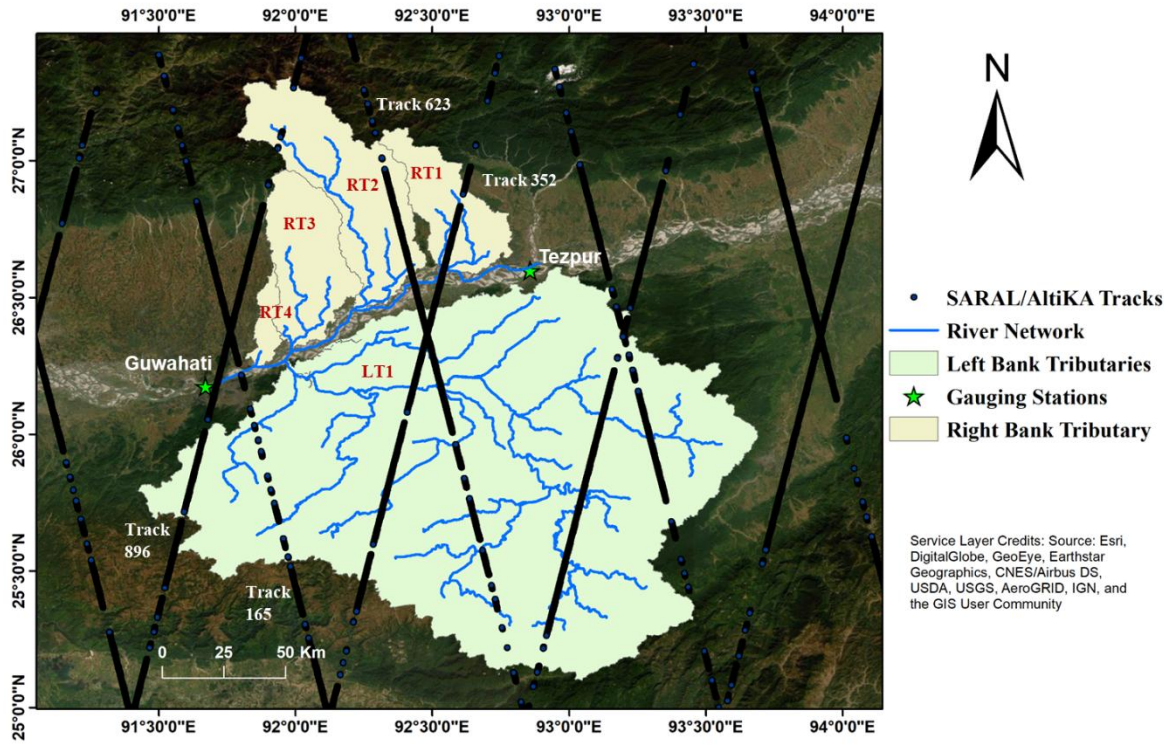


Figure 3. Brahmaputra River reach for HD model and SARAL/Altika tracks crossing the river

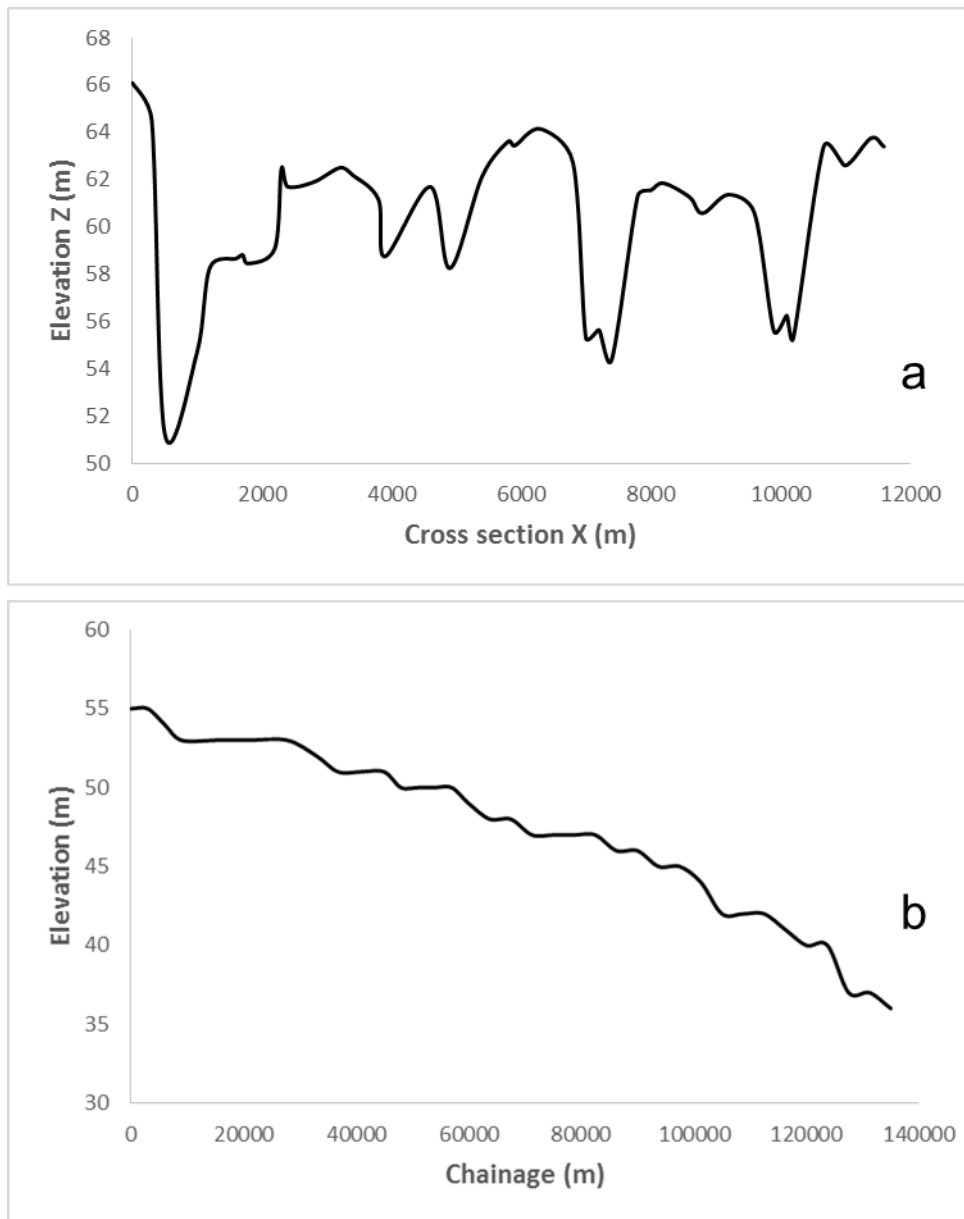


Figure 4. (a) Hybrid cross section at 23000 m chainage (b) Longitudinal profile of the main channel

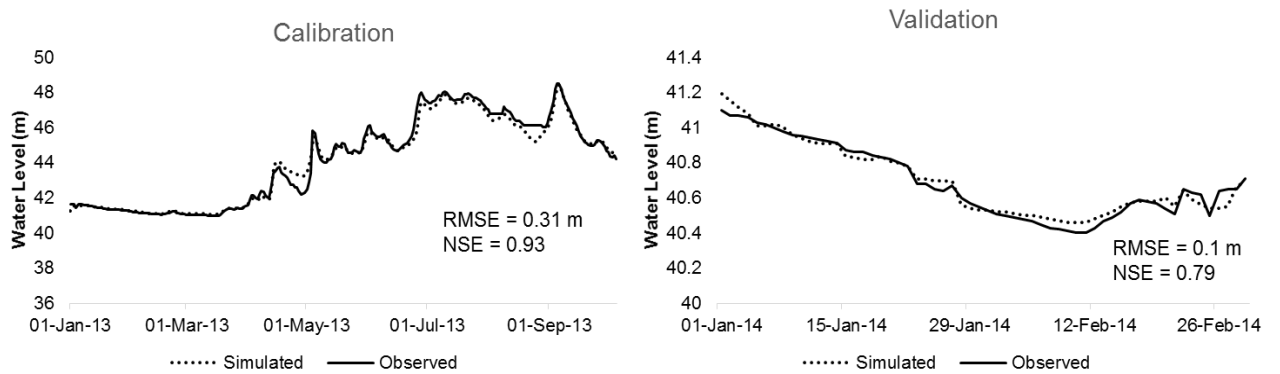


Figure 5. Calibration and validation of the HD model at Guwahati station

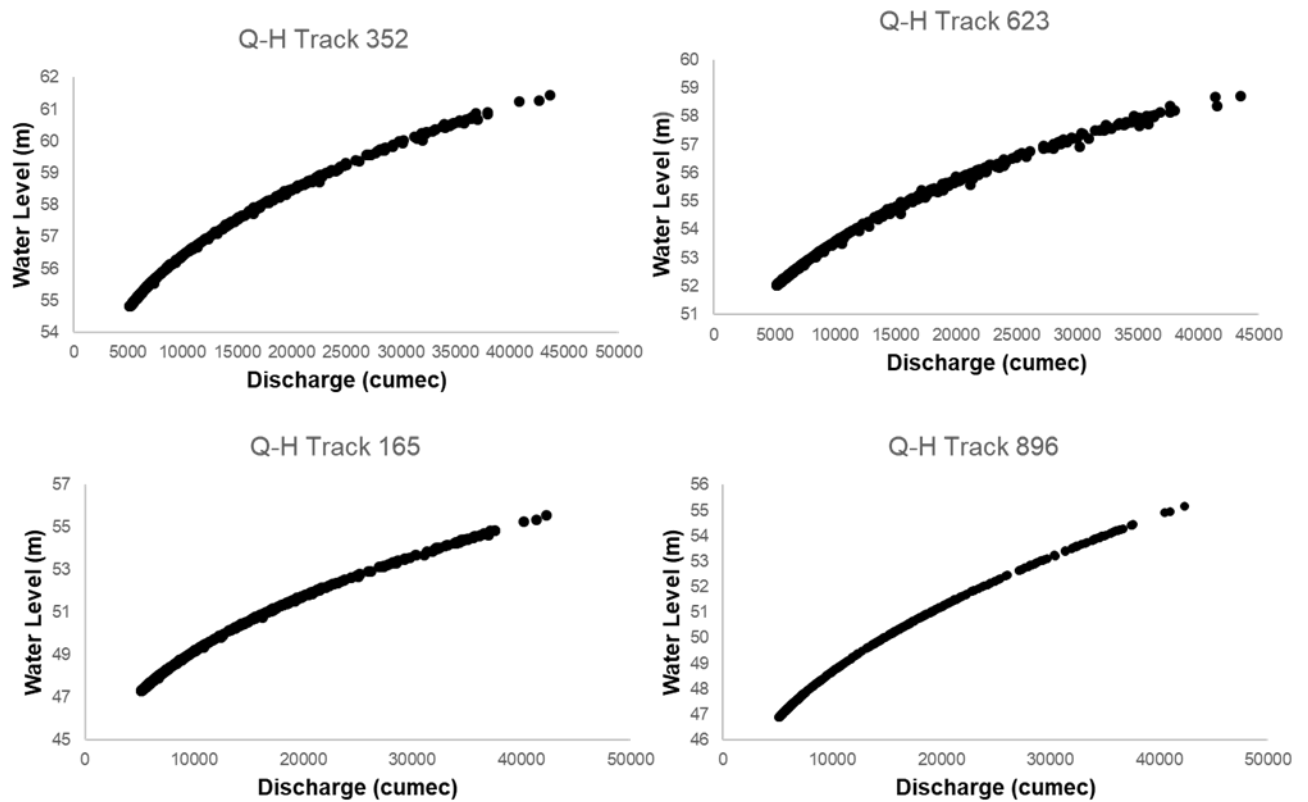


Figure 6. Rating curves generated at virtual stations by means of the HD model run over the period from 1st January 2013 to 10th October 2013

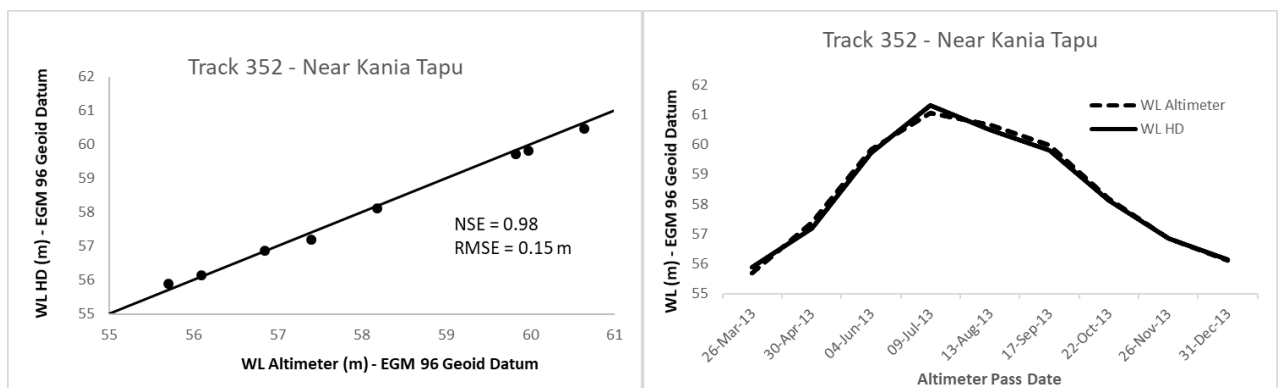


Figure 7. Comparison of the water level provided by the altimeter and the HD model (Track 352)